SCIENTIFIC AMERICAN

[Entered at the Post Office of New York, N. Y., as Second Class Matter. Copyright, 1905, by Munn & Co.]

Vol. XCII.—No. 22.
ESTABLISHED 1845.

NEW YORK, JUNE 3, 1905.

8 CENTS A COPY.
$3.00 A YEAR.

WAR DEPARTMENT
OFFICE CHIEF OF STAFF
No.
JUN -2 1905
MILITARY
INFORMATION DIVISION.

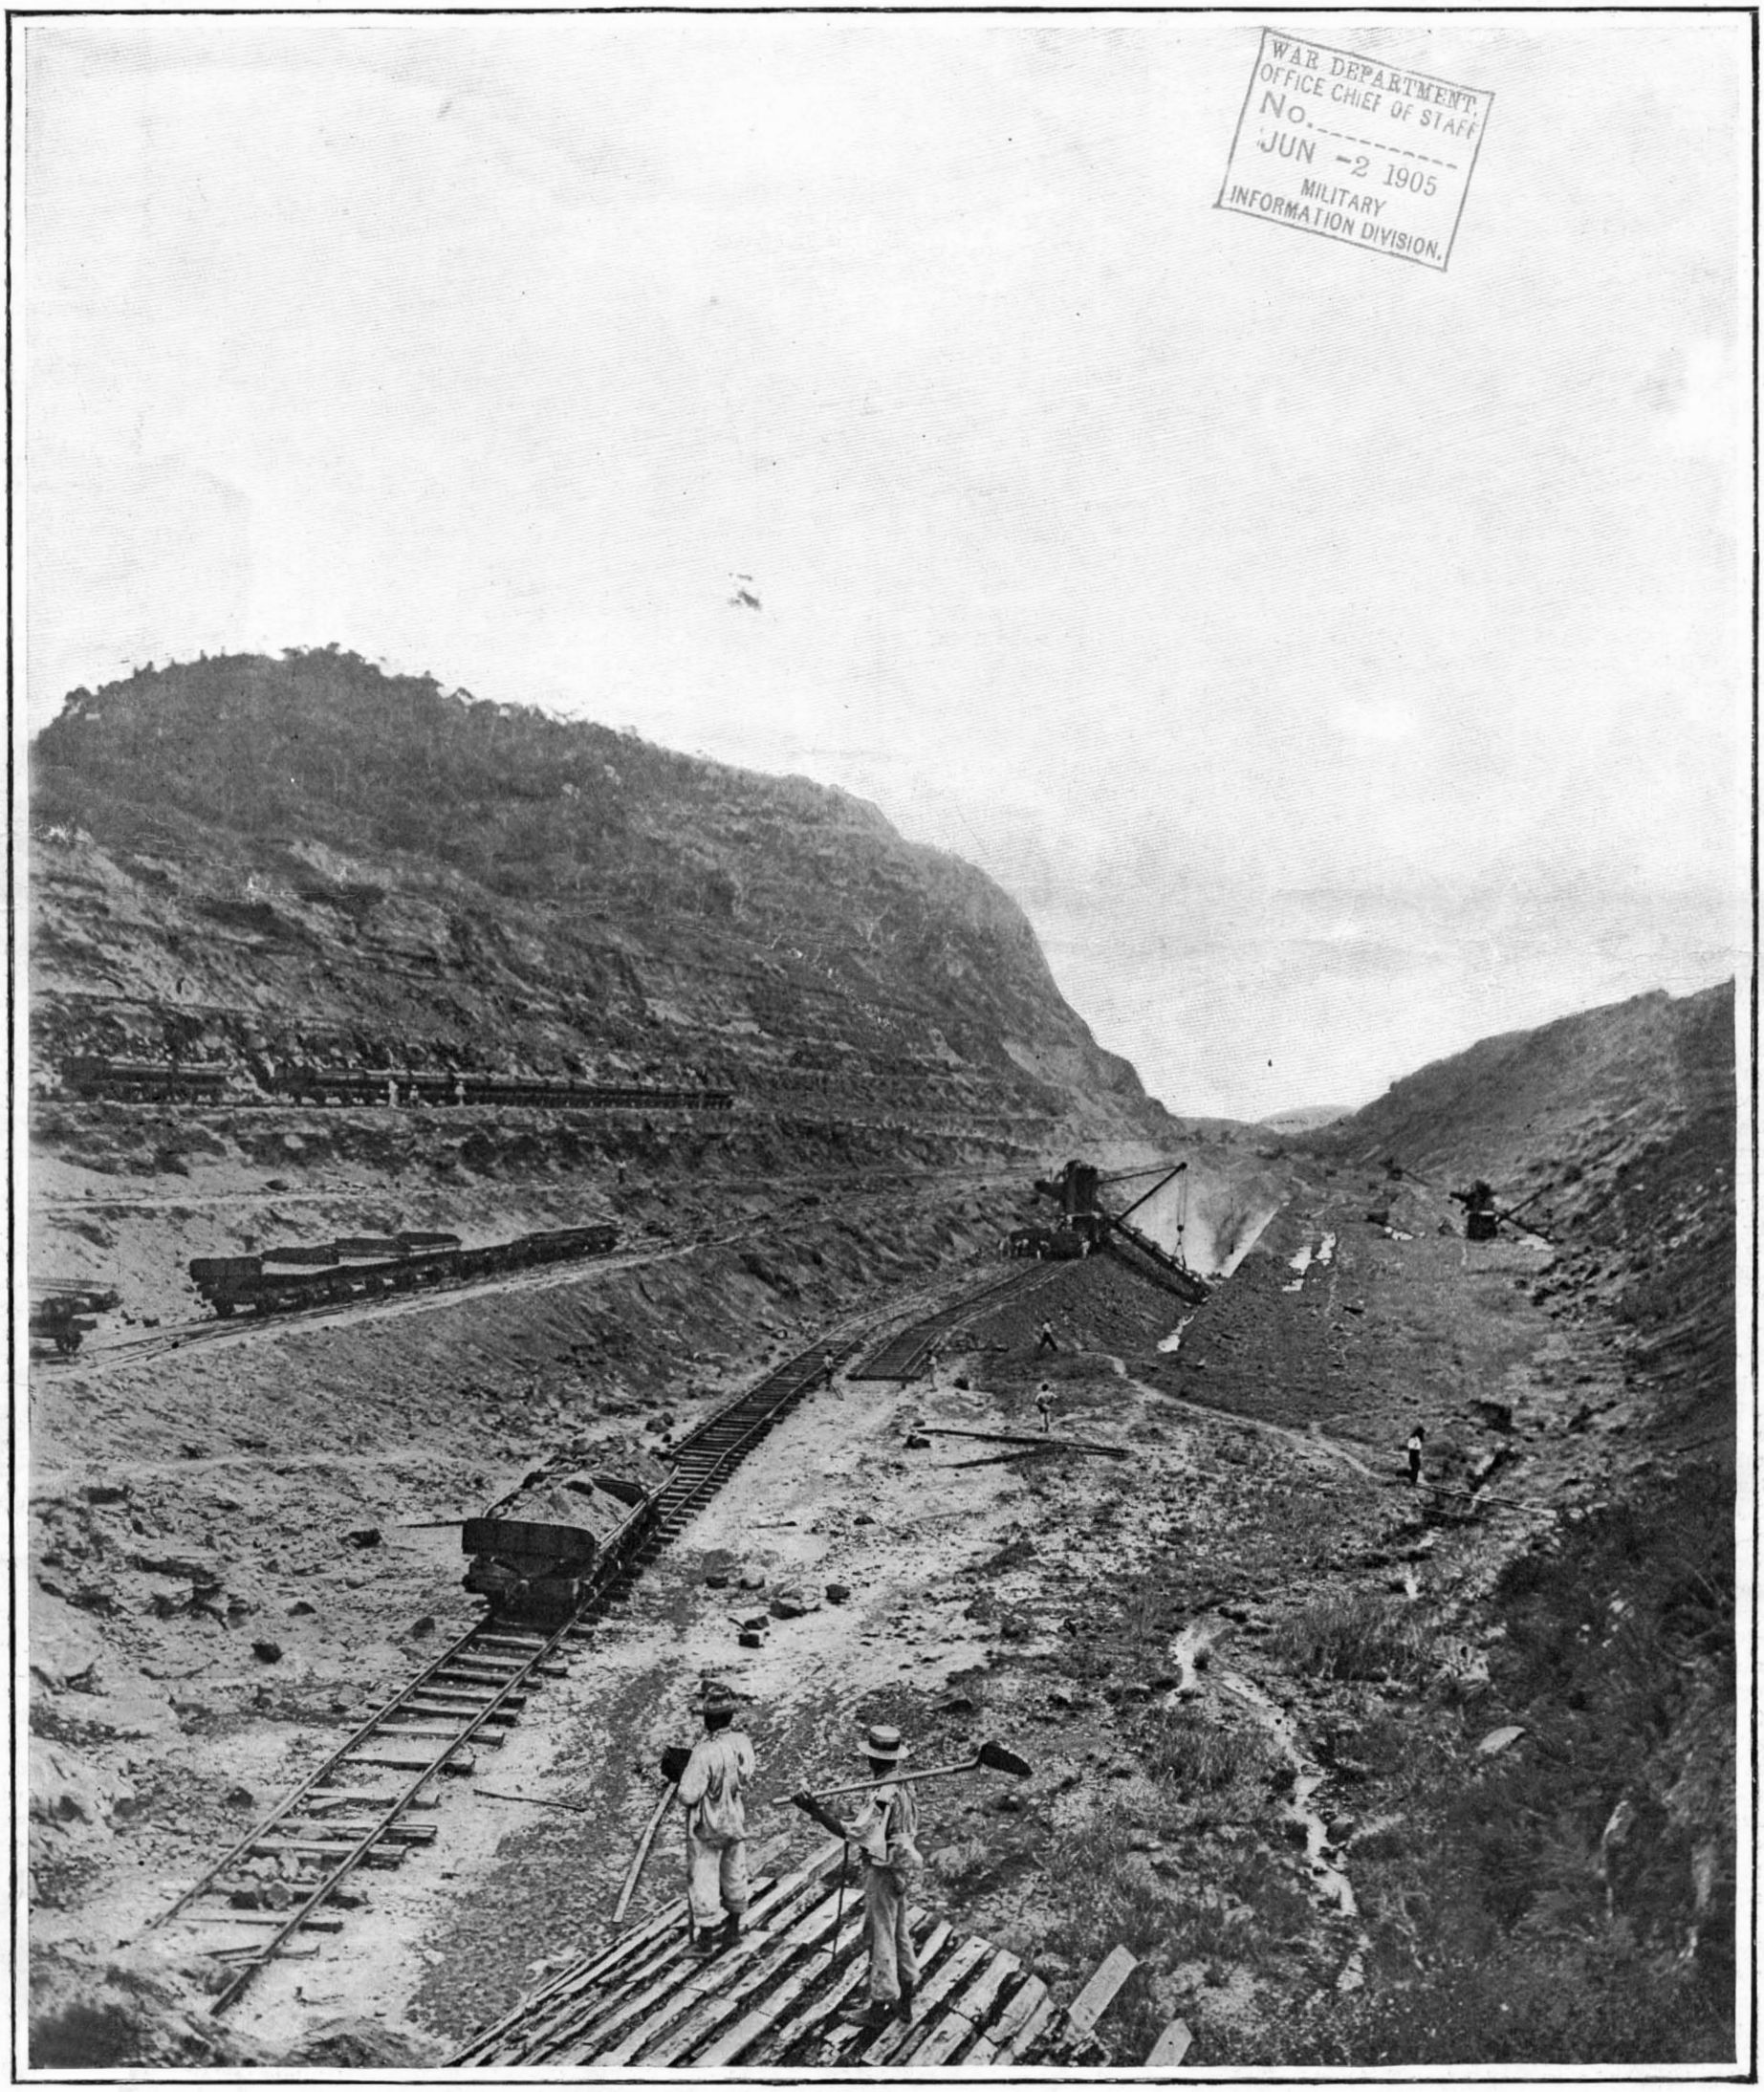

Copyright, 1904, by Underwood & Underwood.

The Culebra cut is the controlling feature in the question of time necessary to complete the canal. If a sea-level canal be dug the cut will have a maximum depth of 360 feet, and 186 million cubic yards of material must be excavated. It will take two years to install the plant and six to eight years to complete the cut.

A Portion of the Great Culebra Cut, Eight Miles in Length, Through the Divide.

HISTORY AND PRESENT STATUS OF THE PANAMA CANAL.—[See page 442.]

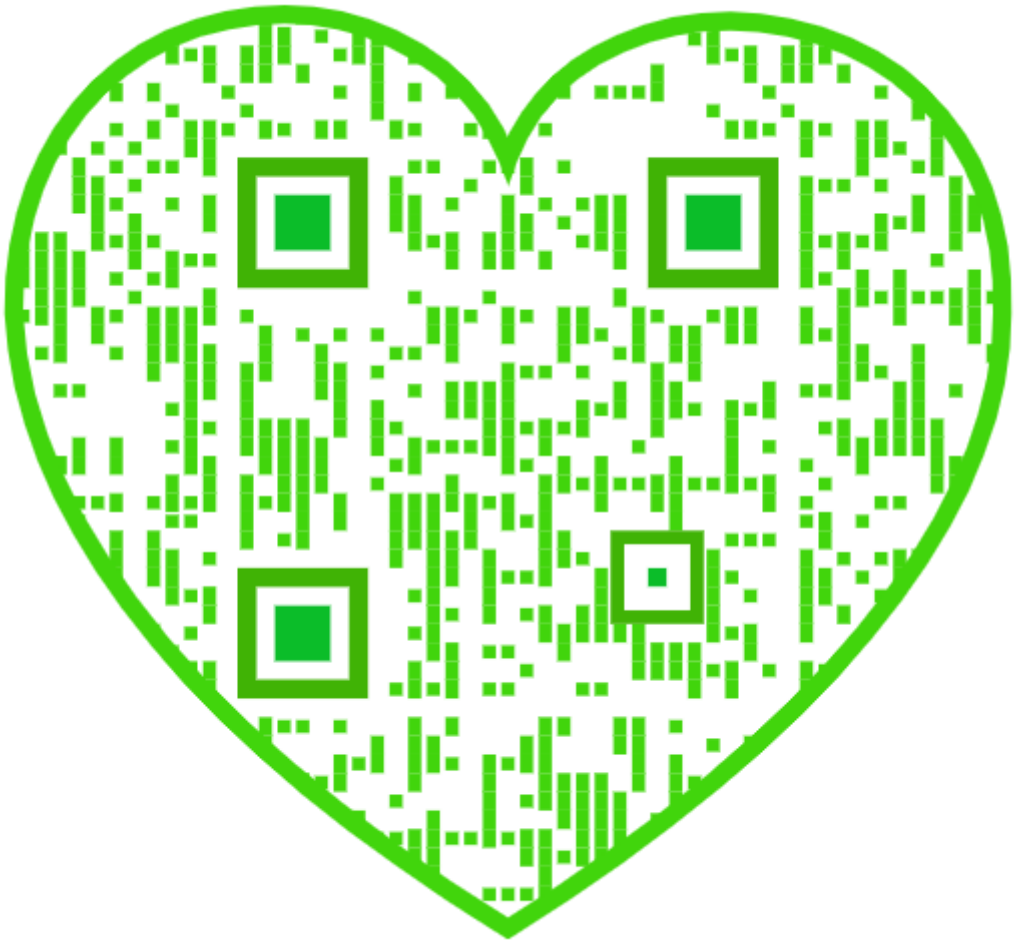

SCIENTIFIC AMERICAN

ESTABLISHED 1845

MUNN & CO., - - Editors and Proprietors

Published Weekly at

No. 361 Broadway, New York

TERMS TO SUBSCRIBERS

One copy, one year for the United States, Canada, or Mexico $3.00
One copy, one year, to any foreign country, postage prepaid. £0 16s. 5d. 4.00

THE SCIENTIFIC AMERICAN PUBLICATIONS.

Scientific American (Established 1845) ..... $3.00 a year
Scientific American Supplement (Established 1876) ..... 5.00 "
Scientific American Building Monthly (Established 1885) ..... 2.50 "
Scientific American Export Edition (Established 1878) ..... 3.00 "

The combined subscription rates and rates to foreign countries will be furnished upon application.
Remit by postal or express money order, or by bank draft or check.
MUNN & CO., 361 Broadway, New York.

NEW YORK, SATURDAY, JUNE 3, 1905.

The Editor is always glad to receive for examination illustrated articles on subjects of timely interest. If the photographs are *sharp*, the articles *short*, and the facts *authentic*, the contributions will receive special attention. Accepted articles will be paid for at regular space rates.

ALTERNATIVE PLANS FOR THE PANAMA CANAL.

An engineering work of the great size and complicated character of the Panama canal should be the subject of most exhaustive examination before the final plans for its construction are adopted. To the lay mind it might seem that already time and expense enough had been incurred in preliminary investigations; but to the engineer it is well known that in hydraulic works of the magnitude of the Panama canal, it takes years to acquire that intimate knowledge of climate, topography, and sub-surface conditions, which is absolutely essential before he can say, "I will build this work upon such a plan, for such a cost, and within such a time."

That the last word must not be too hastily spoken in the matter of selecting the general plan of this canal, is shown by the fact that Mr. Lindon W. Bates, one of the most experienced of American engineers in work involving heavy excavation, has recently presented to the President two alternative plans for the construction of the canal, which have so much to recommend them that they are certain to receive most careful consideration from the canal commission. The leading illustrated article of this issue gives a clear account of the plans for a sea-level canal that are tentatively favored by the present commission; and they form the basis of comparison in the present sketch of Mr. Bates's suggestions. The first of his projects involves the construction of two large terminal lakes, one extending from Mindi near the Atlantic Ocean to Bohio, a distance of 12 miles, and the other reaching from La Boca to Pedro Miguel, a distance of 5 miles. These two large reservoirs would afford about 17 miles of lake navigation, and because of the higher speed at which ships could travel in crossing them, would reduce the time of transit three hours below that which would be necessary to pass through the proposed sea-level canal. Entrance to the lake at the Atlantic end would be by locks with a lift of about 25 feet. One advantage of the lake would be that a large area of swamp land would be covered by fresh water, and a fine interior harbor created for vessels; moreover, all excavation of the channel along the sailing route could be performed by floating dredges. The canal between the two lakes, thus formed, would be excavated through the divide at the same level as the lakes, there being thus a single summit level of plus 20 from the Mindi dam on the Atlantic to La Boca dam on the Pacific. At Gamboa, which is about midway between Bohio and Pedro Miguel, Mr. Bates proposes, for control of the Chagres, the construction of a dam provided with under-sluiceways, with provision for discharging one-half of the flood waters of the Chagres River to the Pacific and one-half to the Atlantic. The great advantage of this plan over the one proposed by the present chief engineer of the canal is that it will be possible to receive the sudden floods of the Chagres in a reservoir that is normally empty, and permit them to escape at will.

The second project offered by Mr. Bates provides for four locks, with a summit elevation 52.5 feet above mean sea level. This plan, in addition to dams at the Atlantic and the Pacific end of the canal, calls also for the erection of dams at Bohio and at Pedro Miguel, and the creation of a lake at Bohio with a surface level of 52.5, which is entered by locks with a lift of about 30 feet, and which extends for 15 miles to the foot of the Culebra divide. The canal is cut through the divide with the same surface level as that of Bohio Lake, descent being made at Pedro Miguel to the 20-foot level, which extends from Pedro Miguel to the Pacific. Briefly stated, the first scheme will consist of two lakes and a connecting length of canal, all at an elevation of 20 feet above mean sea level. The second scheme will consist of two terminal lakes at an elevation of 20 feet above mean sea level, and a summit lake and length of canal with an elevation of 52.5 above mean sea level.

A comparison of these two projects of Mr. Bates with the sea-level canal recommended by the present chief engineer, shows that unless there are some physical features that would prevent its execution, either of the new plans would have several important points of advantage over the sea-level plan. For in the first project there would be 17 miles of lake navigation, and in the second 26 miles (over one-half the length of the canal), as against an all-canal navigation in the case of a sea-level canal. The time of transit of large vessels would be reduced from say 12 hours to about 9 hours, and the time of completion from ten years, which is the most optimistic estimate of the chief engineer, to eight years. Finally, judged on the question of cost, Mr. Bates estimates that there will be a saving of about $85,000,000.

The fact that an eminent engineer, as the result of an independent investigation of the problem, should be able at this late day to present a scheme that has so many admirable features, certainly shows the wisdom of the President in determining to call in some of the most eminent engineers of Europe to act in a consulting position with our own engineers in choosing the final plans for the canal. So monumental is this work, so far-reaching will be its effects upon the commerce of the world, that the plan upon which it is built should be not merely a good one, but the very best possible for the conditions.

Card - H.C.H. Carded E. F.

AN ATTACK ON THE WIRE-WOUND GUN.

An ex-lieutenant of the British navy has created not a little stir in naval circles by writing a series of letters to the London Times, in which he tries to throw discredit upon the wire-wound gun. These letters were based upon the fact that some guns of this type in the British navy had developed a crack in the liner, the thin inner tube which carries the rifling, and had been sent to the gun factory to be relined. It must be admitted that on the face of it the mere statement that some 12-inch guns had "cracked," sounds ominous. But when we come to examine into the construction of these guns, the location of the cracks, and their effect upon the strength of the gun, we find that the defects are of such minor consequence that the strength of the guns is not in the least affected. As a matter of fact the very powerful powder, cordite, used in the British navy exercises such a rapid scoring effect on the liner, that after a certain number of rounds have been fired, the guns must be returned to the factory for relining. The scoring of the gun is the penalty which the authorities are willing to pay for the sake of using a powerful explosive, whose bulk is not much more than half as great as that of the less powerful propellants which do not score the guns so severely.

The 12-inch wire-wound gun is assembled in the following manner: First there is the inner tube or liner, which is placed there to carry the rifling grooves and to protect the gun proper from the action of the white-hot powder gases. Then comes the main tube, or A tube, as we should call it in this country, a thick, heavy tube extending the full length of the gun from breech to muzzle, whose object is to carry the 100 miles of wire which is wound upon the tube, and which constitutes the actual strength of the gun. The wire is wound at a tension so great that the metal of the tube is thrown into a state of initial compression. This compression is such that when the gun is fired, the whole of the bursting or tangential stress is immediately transmitted to the wire, which has an ample margin of strength to take care of any legitimate pressures that are set up by the powder. In the English guns the A tube is forged and bored and turned from a single piece of metal. In the Brown wire gun, as manufactured in this country, the A tube is formed of a series of involute, overlapping, thin steel plates, and in this gun the wire is wound at such great tension on the tube that when the gun is fired, the metal of the tube never even passes from a compressive to a tensile condition. In both guns the wire winding is covered from breech to muzzle with a pair of outer steel tubes which serve to protect the wire from injury by shot or shell. In the gun as thus made up, the longitudinal stresses tending to pull the gun apart in the direction of its axis are taken care of by the inner barrel or A tube, and by the outer hoops, which are locked into one another. The bursting stresses are resisted by the wire-winding, assisted by the outer hoops, and the inner tube or liner is not called upon, in estimating the strength of the gun, to resist either of these stresses, tangential or longitudinal. So true is this, that the liner might be split through its entire length, as we believe happened in some of the guns in question, without impairing the strength of the gun.

The SCIENTIFIC AMERICAN holds no brief for the wire-wound gun, and we merely desire to place the full facts of the case before the public, especially at the present juncture, when the gallant little Japanese navy is having to depend upon guns of this type in the most momentous crisis of the war. We understand that the wire-wound guns of the Japanese have given excellent service, and that, in spite of the severe service to which they have been put, there has been no case of failure. As to the life of the wire-wound gun, it appears that when the first of the type were made for the "Majestic" class of battleships of the British navy, it was estimated that the inner tubes would not last for more than sixty to eighty rounds. But, according to the Admiralty, the equivalent of 162 rounds has already been fired from one of these guns, and others which have fired the equivalent of over sixty full charges, are still perfectly serviceable. In this connection it is of interest to note that the highest velocity yet attained in this country for a gun of large caliber was recorded not long ago in the army tests at Sandy Hook of the new Brown wire gun, when some rounds were fired with a velocity of over 3,300 feet per second. Another wire-wound gun, designed by Gen. Crozier for the army, is nearing completion, and will shortly be subjected to test.

THE PREPARATION OF SURFACES FOR PAINTING.

In preparing a panel of wood or cardboard for the reception of a painting in oil colors, it is desirable to make the ground agree with the layer which forms the painting in respect to expansion by heat and moisture, otherwise cracks are sure to occur in time. The panel may be painted with boiled linseed oil, which penetrates to a certain depth and is hardened by oxidation to a thin, tough coating, identical with the hardened oil in which the pigments are imbedded. A painting on such a ground may be exposed to great variations of temperature without danger of cracking. The preparation takes time, as the oil must become quite hard before the painting is begun. It is advisable to oil both sides of the panel and the edges, to prevent danger of warping from dampness. The best way to oil panels in quantity is to place them on edge, separated by small blocks of wood, in a tin vessel which is then filled with well-boiled oil, heated gradually from beneath to 110 deg. or at most 120 deg. C. (230 deg. to 248 deg. F.) and allowed to cool. The pores of wood and cardboard are filled with air, and both contain large quantities of water, the moisture in thoroughly air-dried wood amounting to 20 per cent by weight.

During the heating the air is first driven out, and then the water, which at 120 deg. C. may be assumed to be entirely expelled, and during the slow cooling the external air pressure forces the oil so deeply even into hardwood that panels a quarter or a third of an inch thick are saturated throughout. The panels are taken out and allowed to drain, and the excess of oil is removed with a cloth or brush. They are then kept standing on edge, without touching each other, for several months, in order to harden the oil in the interior as well as on the surface.

Paintings on panels thus prepared are not only uninjured by variations in temperature and humidity, but they may be cleaned by washing and are not attacked by insects, which often ruin unprepared panels.

Metallic grounds are little used by artists, although very small paintings are sometimes executed on plates of copper. Such plates, though strong, durable, and proof against dampness, are peculiarly liable to produce cracks in the paintings executed on them, because they expand or contract so greatly and so quickly with every change of temperature. This defect, however, can be remedied to a great extent by giving the metal a tough, elastic coating, for which purpose linseed oil is again employed. The plate is roughened with a fine file, slightly polished with pumice stone, washed, dried, and immediately painted very thinly with hot oil, which penetrates into all the irregularities and, when hardened, adheres firmly, the adhesion being increased by chemical action of the acids in the oil upon the copper, which thereby assumes a greenish tint. Three coats of oil are given, each of which is allowed to become quite hard before the next is applied.

The painting, therefore, rests on a tough, elastic coating of hardened oil, which protects it from the effect of expansion of the metal.

Sheet-metal signs and the lettered and decorated tin boxes in which small wares are sold soon become defaced when exposed to changes of temperature, particularly if the colors have been mixed with quick driers, as is generally the case. The process above described is too costly to be applied to most of these articles. A simpler method consists in giving the metal one coat of thoroughly boiled oil, or better drying oil, and grinding the colors in the latter without any special drier. The plates do not dry very rapidly, but this simple process is not only cheaper, but more effective in securing permanence than the use of colors ground in soft resin varnishes, as practised by some manufacturers.

Plaster and stucco are painted in both oil and distemper. The colors sink into the porous wall, and one spot may have to be repainted several times to produce the desired effect. This inconvenience is easily avoided by giving a preliminary coat of size for distemper, or of hot boiled oil for oil painting.

The finished painting should receive a coat of var-

nish or paraffin. When paraffin is used, however, the wall should be neither sized nor oiled before painting, and the colors should be mixed with a minimum quantity of thin size. When dry they are covered with melted paraffin, hot enough to sink well into the wall before solidifying, a condition which is made known by the instantaneous disappearance of the gloss. Additional coats of paraffin are then applied until a permanent gloss is produced, and the surface is finally polished with a woolen cloth. Such mural paintings are very permanent, as the chemically-inert paraffin protects both the wall and the colors.—Condensed from Der Stein der Weisen.

THE HEAVENS IN JUNE.

BY HENRY NORRIS RUSSELL, PH.D.

With the recent astronomical periodicals comes fuller information about the two new satellites of Jupiter. Thanks to the zeal of Prof. Perrine, a sufficient number of observations of each of these bodies has been obtained, before Jupiter got too near the sun to be seen by night, to enable their orbits to be roughly calculated. This makes it certain that these faint specks are really moons of Jupiter and not merely small asteroids which happened to be near him when the first photographs were taken. It will also make it easy to find the satellites again when Jupiter reappears in the morning sky by telling us where to look for them.

The results which Prof. Perrine has announced are somewhat remarkable. The sixth satellite (which is the brighter of the two) is about seven million miles from the planet, and takes about 250 days to complete a revolution. The outermost satellite previously known (the fourth) is only one-sixth of this distance from Jupiter and its period is about sixteen days.

The seventh satellite, which is much fainter, revolves in an eccentric orbit, at a mean distance of about six million miles, with a period of some 200 days.

The planes of the orbits of these two satellites are considerably inclined to that of the orbit of Jupiter, to the orbits of the inner satellites, and to each other.

They are both very small bodies. The sixth satellite, which is of the 14th magnitude, has been seen with the 26-inch telescope at Washington, and is therefore within the power of a number of instruments. The seventh satellite is estimated as 16th magnitude—about as bright as the new satellite of Saturn—and can only be seen with one or two of the very largest telescopes. They are so far from the planet that they might have remained undiscovered for centuries had it not been for photography.

From their brightness, as compared with the larger satellites, Prof. Perrine concludes that the sixth satellite is 100 miles or less in diameter, and the seventh about 35 miles.

It is not yet known whether these two new satellites revolve about the planet in the same direction as the other five. How this may remain indeterminate, when so much is known about their orbits, appears from the following considerations: We can tell by watching the satellite go once round Jupiter (or even part of the way round) how far to the left and right of the planet it goes, how long it takes to go round, and so on; but we cannot tell merely by looking at it whether it is nearer to us than Jupiter, or farther away, whether it is approaching us, or receding from us—and this is just what we need to know to determine the direction of the satellite's motion. To solve the problem we must wait a year or two, until Jupiter has moved some way along his orbit, so that we see the orbits of the satellites at a different angle. Then, by combining the two views of the orbit, we can tell which is the nearest part of it in the same way in which the stereoscope, by combining two views of a landscape, enables us to pick out the nearer objects.

It will be of great interest to see whether these two satellites go backward, like Phœbe, the outer satellite of Saturn, which they so much resemble in other ways, or have a direct motion like the general run of satellites.

The brightest objects in the evening sky are Arcturus and Mars. At 9 P. M. in the middle of this month they are both close to the meridian, Arcturus being about 20 deg. south of the zenith (in the latitude of New York) and Mars about 35 deg. lower down. The planet is brighter and redder than the star. To the right of Mars and nearly at the same level is Spica. The other stars of Virgo are higher up and farther west. Below them is the little group of Corvus. Leo lies in the west at a moderate altitude. Below him is Hydra, whose long tail stretches to the meridian under Mars. Ursa Major is high up, extending northwestward from the zenith. Castor and Pollux are still visible in the northwest and Capella is just setting still farther to the north.

On the meridian below Virgo can be seen a part of Centaurus. Its two brighter stars, which almost equal Arcturus, can only be seen from points south of latitude 30 deg.

In the southeast is Scorpio. The three stars which lie near the creature's head and the red Antares at its heart are all visible, but its long tail extends below the horizon. The tangle of stars above and to the left of Scorpio form the constellations Serpens and Ophiuchus. Through them runs a branch of the Milky Way.

Farther north is a line of fine constellations. Aquila is low in the east. Its principal star, Altair, is flanked by a smaller one on each side. Higher up and farther north is Lyra, which contains Vega, the brightest star in this part of the sky. Between Vega and Arcturus are Hercules, marked by a figure shaped like the keystone of an arch, and Corona, whose stars form a semicircle. Below Vega, to the left, is Cygnus. Cassiopeia is beneath the Pole. Cepheus on the right.

THE PLANETS.

Mercury is morning star till the 24th, when he passes through superior conjunction and becomes an evening star. He is not well seen at any time during the month.

Venus is morning star in Aries and is very conspicuous, reaching her greatest brightness on the 2d and rising between 2 and 3 A. M. all through the month.

Mars is the principal feature of the evening sky. He is on the border of Virgo and Libra, and comes to the meridian at 9.50 P. M. on the 1st and at 7.50 on the 30th. He is still quite near opposition, but is gradually receding from us, and his distance increases from 51 to 63 millions of miles during the month. He is nearer at the present opposition than he has been for some years past (though not so near as he will be next time) and his surface will doubtless be carefully scrutinized.

Jupiter is morning star in Taurus, rising about 3 A. M. Venus is slowly overtaking him, but they will not be in conjunction till next month.

Saturn is in Aquarius and rises about midnight.

Uranus is in opposition on the 24th. He is very far south, being in R. A. 18 h. 10 m., dec. 23 deg. 41 m., about 3½ deg. south of the fourth magnitude star μ Sagittarii.

Neptune is in conjunction with the sun on the 30th and is invisible.

THE MOON.

New moon occurs at 1 A. M. on the 3d, first quarter at 8 A. M. on the 10th, full moon at 1 A. M. on the 17th, and last quarter at 3 P. M. on the 24th.

The moon is nearest us on the 13th and farthest away on the 25th. She is in conjunction with Jupiter and Mercury on the 1st, Mars on the 13th, Saturn on the 22d, Venus on the 28th, and Jupiter again on the 29th. The conjunction with Saturn is close.

At 10 P. M. on the 21st the sun reaches his greatest northern declination, and enters the sign of Cancer, an event described by the almanacs with the conventional phrase "Summer commences."

Cambridge, May 9, 1905.

ELECTRICITY AND BREAD.

The power of the electric current to decompose certain substances in a singular way has led to an important development of electro-chemistry. In this connection experiments have recently been made in Paris, seeking an improvement in bread making.

Laboring under the mistaken impression that the whiteness of wheat bread determines its quality—that the whiter the bread the better—the Parisian public has for years been growing more and more exacting on this score, and therefore the fineness of grain flour has been gradually approaching a limit. The public has, as a consequence, received a less nutritive food, it being a known fact that the core of the wheat grain, which is the chief constituent of bread, while producing the whitest flour, at the same time contains the smallest amount of albumen and is thus least nutritious.

There has recently been raised the hope of obtaining a whiter bread by aid of electricity, for which purpose the flour was brought in contact with electrified air, whose ozone possesses efficacious bleaching properties. A report to the Academy of Sciences at Paris on the result of an experiment with flour treated in both the ordinary way and by electricity, under similar conditions, explains that the flour subjected to electric influence was much whiter in color, but that its taste and odor were far inferior to those of flour treated by the ordinary method. The amount of phosphorus was the same in both, but the quantities of fatty and acid substances varied largely. Thus, in flour treated by electricity the fatty substances proved rancid, glutinous, and of a less yellowish color, and instead of retaining their usual aromatic, yellow state, became oxidized and partly converted into white sebacic acid, which could be dissolved in alcohol. The glutinous substances were discolored and changed.

The bread made from this flour was whiter than usual, but of inferior taste, and the experiment serves to demonstrate that electric treatment, while successfully turning flour whiter, injures it.

The number of persons employed in the United Kingdom in mines underground in 1904 was 681,683, against 676,746 in 1903; and the numbers above ground were 165,870 and 165,320 respectively.

SCIENCE NOTES.

A rubber film glove, the feature of which is antiseptic qualities, has been devised for surgeons. The idea consists of immersing the hands in a weak solution of gutta-percha in benzine or acetone, or applying the solution to the skin of the patient. The purpose of the film is to seal the surfaces of either the hands or skin with an insoluble, impervious, and practically imperceptible pellicle, which will not allow the secretions of the skin to escape, and will not admit blood, pus, or secretions into the crevices of the skin. Such a protective measure for surgeons is preferable to working with rubber gloves, inasmuch as the sense of touch or pliability of the skin is not impaired in any way, as is the case when detachable gloves are used.

A report has been presented to the French Academy of Sciences by M. J. Violle "on the action of hail cannons." In this report is given for the first time some trustworthy information covering a wide area and for an extended period, thereby supplying conclusive evidence as to the utility of this means of avoiding or mitigating damage in the vineyards from hailstorms. M. Violle's report refers to the district of Beaujolais, where there are established twenty-eight societies for dispersing in this manner the hailstorms common to that region. Comparing the losses suffered in the period 1900 to 1904, since the introduction of the cannon, with those of the preceding ten years, from 1891 to 1900, the evidence strongly supports the view that the cannon firing is protective. It has been frequently noticed, M. Violle remarks, that both lightning and thunder are suppressed within the zone where cannon are used, although they may be raging just outside the area.

Some discoveries of valuable archæological interest have been made in the tombs of Luxor by Mr. Theodore M. Davis, of Newport, R. I., who has been annually wintering in Egypt for many years. Mr. Davis has become an enthusiastic Egyptologist, and has carried out a number of excavations. During his latest investigations in February last, he unearthed in the Valley of the Tombs of the Kings in Luxor the tomb of a daughter of Amenhotep III. and of the father and mother of his wife Queen Thy. The mummies of the father and mother had been carefully unrolled in the search for jewels and gold in ancient times, but nothing had been discovered. The tomb contained coffins covered with gold leaf, carved and gilded chairs, alabaster Canopic jars, religious symbols of fine quality, a large roll of papyrus, and a complete chariot with wheels, pole, and neck yokes. The body of this chariot was covered with gold leaf. A special interest is attached to the last named, as it is the only complete chariot that has yet been discovered. It has been removed to the Cairo Museum.

A discovery of great archæological interest has been made in the district of Umtali in Central Africa during some recent exploration. Extensive ruins of what apparently were buildings of some antiquity have been revealed. One of the most interesting objects unearthed is a structure shaped like a cairn, and unique in the history of the country since the establishment of white rule. It is twelve feet long and about the same width, with a small curious construction at one end. Notable features of the cairn are that each side—excepting one, which has been displaced by the growth of a large tree—bears traces of skilled handiwork. The material, which strangely enough differs in character, is dressed and faced throughout in artistic style. One side is composed entirely of quartz, while the others consist of soapstone and gneiss respectively. Whether the structure covers the remains of some distinguished ancient, or merely symbolizes some important event in early times, remains to be seen. The whole of the ruins, and particularly the cairn, are being carefully examined by an expert, in the hope that they may furnish a clew, if not the key, to the mystery of the ruins at Great Zimbabwe.

The Secretary of the Treasury has instructed the collectors of customs that the astronomical instruments exported from this country for use by various astronomical expeditions for observing the coming eclipse are to be readmitted free of duty. The order was the result of a long correspondence between the director of the Lick Observatory in California and the Secretary of the Treasury. W. W. Campbell, director of the Lick Observatory, contended that the astronomical instruments which will be used for observing the eclipse should be readmitted into this country free of duty. Nearly all were manufactured abroad. Secretary Shaw has ruled that although the articles would ordinarily be subject to duty the interests of science demand that the law be suspended. Among the articles to which the ruling applies are telescopes, mirrors, prisms, lenses, clocks, tents, photographic materials and all manner of tools. A number of educational institutions, including Harvard, Princeton, and the University of Indiana, and also the United States Naval Observatory will contribute equipment for the three expeditions. The Lick Observatory will take general charge of the expedition.

A New Incandescent Lamp.

A new incandescent lamp with a zirconium filament is announced in Germany. Prof. Wedding, the well-known physicist, recently presented a lamp of this kind to the Electro-technical Society of Cologne. The details of the process are as follows: To obtain the filament he submits oxides of zirconium and magnesium at a high temperature to the action of hydrogen, which gives an alloy of a more or less constant composition. This body is then pulverized, and by adding a cellulose solution it is transformed into a plastic and homogeneous mass. It is from this mass that the filaments are drawn. The latter are carbonized in an atmosphere which is free from all traces of oxygen, and then present a metallic appearance. It is said that one pound of zirconium will furnish 50,000 filaments. The new lamp is to be placed on the market at the price of $0.37. Under regular working, the zirconium filament consumes a current of 2 watts per candle-power, which is less than for the usual carbon filament. The zirconium lamps are made at present to run with a current of 37 volts, and three of them can be conveniently placed in series across the usual 110-volt circuit. Another type uses 44 volts, and five lamps are connected upon a 220-volt circuit. To obtain a high candle-power lamp they place several filaments in the same bulb and the lamp is then connected directly upon a 110-volt circuit. Experiments which have been made with the lamp show that it has a life of 700 to 1,000 hours.

ELECTRIC MAIL AUTOMOBILES.

The post office department of Paris is now using several electric mail wagons which are designed to transport the mail matter in larger quantities and at a greater speed. These now run within the city limits, and distribute the mail between the main post office and the different branch offices which lie throughout the city. Our engraving shows one of these new automobiles, which have been specially built for the purpose by Mildé & Co., one of the leading electrical houses of the city. The new car has the advantage of running at a considerably higher speed and at the same time carries a larger quantity of mail matter—nearly half as much again as the horse vans which were formerly used exclusively for this purpose. These latter are still in use, but it is expected that they will be eventually replaced by the electric van. The latter contains about 45 cubic feet of available space in the interior for the mail matter. The automobile chassis which has been designed for the purpose carries the electric motor, which is built in compact form and entirely inclosed, in the center of the car. The differential device is contained in the same case with the motor. Chain driving is employed from a sprocket on each end of the differential shaft to a large sprocket mounted on each wheel. On the chassis is mounted a box body of considerable size which contains the accumulator cases in the lower part and above this the remainder of the space is used for the mail matter. Access is given to both compartments by a double door in the rear. The accumulator cells are contained in a single box, which can be easily slid out and replaced by a new one. The driver's seat, along with the steering wheel and the controller for the motor circuits, is placed high in the front.

ONE OF THE ELECTRIC AUTOMOBILE MAIL WAGONS IN USE IN PARIS.

ELECTRIC TRUCK WITH MOTORS IN WHEELS TRANSPORTING UNITED STATES MAIL.

It was decided to construct fifteen electric automobiles of the above pattern and put them in regular operation within the city limits in order to give them a good trial and especially to compare them with the horse vans, both as regards economy and speed of running. The new automobiles commenced the regular service about the first of November last, under the direction of M. Duboys, who is the chief of the mail transportation department. Since then the cars have been running very successfully, and all are in accord that they are a great improvement over the old system. Some 15 miles an hour is adopted as the highest speed which can be safely used within the city, but the motors can drive the cars at least as high as 25 miles an hour. Owing to the increased speed over the former system, the mail can be collected from the different post offices at a later hour and in like manner the mail can be distributed sooner, so that the schedule of collecting and closing the mails can be changed some thirty minutes in either direction, and this is a great point in favor of the new system. The increased capacity is another advantage which is appreciated by the post office department. A charging station for the accumulators used on the cars has been installed in the main post office building. The sets of batteries are double, so that while one case of cells is being used on a car, the second is being charged at the station. When the car arrives with an exhausted battery, the latter is at once replaced by a fresh one, without any loss of time. The batteries last for half-a-day's run, and the cars come in for charging twice a day, about noon and at night. The weight of the new cars is given as follows: The automobile proper, including the chassis, body, and mechanism, represents 2,220 pounds, while the accumulators weigh 1,320 pounds. The load of mail matter is 1,430 pounds, and two attendants 310 pounds, which makes somewhat over 2½ tons in all.

Automobiles for the transportation of mail matter are being experimented with by several of the leading governments, and gasoline mail cars are now in use in Berlin, Vienna, and in some of the rural districts of England. On the Isle of Man letters can be posted on a 'bus that travels across the island and carries the mails. The French government is the first to make use of electric automobiles for this purpose, despite the fact that machines of this type are now used so extensively for commercial purposes in this country, where they were first adopted for such service and where they are rapidly being perfected for it. That our own government does not take steps to improve its mail transportation facilities shows how unprogressive it is. Recently a large publishing house in New York, which has a government mail clerk constantly on duty for weighing and dispatching its mails, tried the experiment of making use of a novel electric truck driven by all four wheels, a picture of which is seen on this page. This truck carried a four-ton load of mail bags a distance of two and one-half miles and returned empty—thus covering a distance of five miles—in 58 minutes running time. It cut in half the time taken by horse-drawn vehicles, while the cost for current at six cents per kilowatt was about one cent per ton-mile of load carried. The truck itself weighed about four tons, hence including this weight, eight tons were moved at a cost for electricity of only half of one cent per ton-mile. This compares favorably with a gasoline truck, while there is not nearly so much wear and tear on the mechanism, or so many parts to get out of order.

The novel feature of the electric truck illustrated is not so much the motors in the wheels as the manner in which they drive the latter. The armature shaft is placed horizontally within the wheel, parallel to its plane; and a bevel pinion on each end of the motor shaft meshes with a bevel gear ring attached to the wheel. There are two rings facing each other; one pinion meshes with one of these rings, while the other meshes with the opposite ring. The thrust of one pinion against its ring is balanced by that of the other pinion against its ring. As these two forces are equal and opposite, they form a couple, the result of which is to relieve the armature bearings of nearly all pressure and thus reduce friction to a minimum. So great is this reduction of friction, because of the forces that produce rotation of the wheel acting equally on opposite sides of the bearings, that careful tests have shown an efficiency of transmission of 99 per cent up to 16 per cent overload. When it is remembered that the efficiency of a well-cut spur gear is only 85 to 90 per cent, and that in most modern electric trucks a double reduction is employed, it can readily be seen that there is a saving of about 25 per cent in transmission losses alone by employing the "couple gear" with single speed reduction. That the total efficiency of the vehicle is increased, also, by using four separate motors instead of two seems to be demonstrated by a 30 per cent decrease in current consumption when compared with an ordinary truck of like size.

The life of the battery and motors is greatly lengthened, also because they are never overloaded to any serious extent. The Exide battery on the present truck has been cleaned but once in the fifteen months the vehicle has been in service, and during which time it has covered something like four thousand miles.

So successful has been the manufacture of military rifles at the factory established in Quebec by Sir Charles Ross, that it is now proposed that Canada shall make her own cannon. The purpose in establishing the rifle factory in Quebec was to make the Dominion independent of English manufacturers, who, in the event of the interruption of communication, might be unable to supply rifles for the Canadian troops as rapidly as desired. The results have been entirely satisfactory. Now that the Canadian artillery is to be enlarged and re-armed with a more modern gun, it is held by military experts that the new ordnance should be made in the Dominion.

THE GRAPHIC CHRONOMETER.

BY EMILE GUARINI.

As its name indicates, the graphic chronometer, a recent invention of Dr. A. Jaquet, is employed for the graphic registration of time. It consists, in principle, of a watch having an anchor escapement of fine workmanship, the oscillations of which are, through the intermedium of a special arrangement, communicated to a registering lever. The time is registered by intervals of 0.2 of a second; but, by simply pressing a lever, it is possible to obtain the registration in entire seconds. The precise moment at which the chronometer starts to register is so sharply marked that it is possible even with a speed of 8 inches per fifth of a second, easily to determine the moment of starting within about four one-thousandths of a second.

The graphic chronometer carries, in addition, two dials and two hands, one of which indicates the seconds and the other the minutes. Upon pressing a lever, it is possible to instantly bring the two hands back to zero.

Owing to two terminals with which the apparatus is provided, it can be placed in an electric circuit and thus made to graphically register, for example, the precise moment at which a race is started. It is possible to stop or start the instrument instantaneously by means of a lever placed at the lower part of the chronometer. For cases in which the arrangement of a place would cause an electric signal to be preferred as a register of the time, the instrument has been provided with a contact that permits of affecting also an indirect registration of the time.

A control screw in front serves also for regulating the vibrations of the registering lever. The instrument is constructed with a view to being used with vertical registering drums. If, however, it is desired to effect the registration upon a horizontal drum, it suffices to lighten by means of a thumbscrew a pressure spring, which, bearing against the back part of the registering lever, serves to counterbalance the weight of the latter in a horizontal position.

As regards the accuracy of the registration of the time, numerous experiments made with several different instruments have demonstrated that the amount of probable error varies between 0.0002 and 0.0006 of a second. The control of the absolute variation is effected by observation, for several hours, of the time indicated by the hands and a comparison with a good chronometer. Such possibility of the observer's making the control of himself constitutes, along with its great accuracy, one of the principal advantages of the apparatus, which, inclusive of its case, weighs a little over five pounds.

Its exceedingly compact form renders it particularly well adapted for clinical operations in which the instruments often have to be carried from one room to another, and in which an endeavor is made to avoid complicated installations.

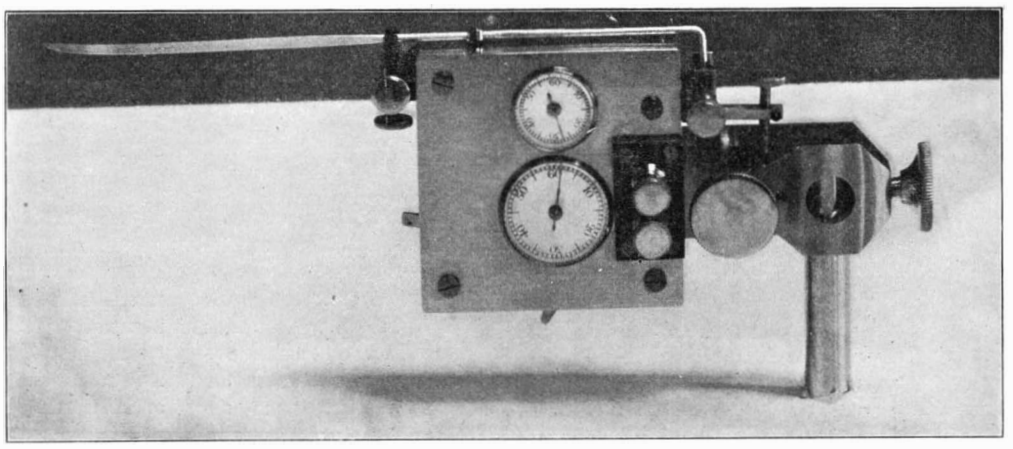

THE JAQUET GRAPHIC CHRONOMETER.

ELECTRIC DEAD RECKONER USED ON "VALHALLA" IN THE OCEAN RACE.

BY THE ENGLISH CORRESPONDENT OF THE SCIENTIFIC AMERICAN.

Every navigator is fully cognizant of the importance attached to "dead reckoning," when no other means of locating his position can be followed, and special interest attaches to the automatic dead reckoner, herewith described, which is being used on the yacht "Valhalla" in the ocean race. For the purpose of facilitating dead reckoning and to enable it to be carried out with unerring exactitude with all possibility of errors eliminated, this ingenious electric apparatus has been introduced by Messrs. Siemens Brothers & Co., London. With this instrument all chances of error are obviated, and the "course and distance" made since the last known "position left" can be taken out by inspection at any moment.

The prominent feature of the appliance is that it makes all corrections for variation, deviation, and leeway. All that is necessary to determine the "course and distance" made, is to scale the "distance" between two points on the diagram with a properly divided parallel ruler, and then slide the ruler over the faint compass card printed on the diagram, and read off the "course." The rate at which the ship has been traveling at any moment can at once be read off the diagram, and the latter when filed away constitutes an actual record of the speed of the ship, and the course she was on, at every moment of time during which the "dead reckoner" was in use. The instrument comprises two essential parts, the transmitter, fixed on the poop, and the recorder, placed in the chart-room, the two being connected by a small electric cable about half an inch in diameter.

As will be seen from the accompanying illustration, the transmitter is carried on a pillar similar to a ship's compass. From the after end of the transmitter box projects a shaft terminating in an eye, to which the rotator is connected by the usual log line. This shaft carries a worm, which gears into a worm-wheel driving one half of a hunting switch, the other portion of the hunting switch being driven through suitable gearing by a small three-phase synchronous motor. The action of the mechanism is as follows: As the portion of the hunting switch driven by the rotator is revolved, it makes a series of contacts with the portion of the hunting switch driven by the motor. Directly the first contact is made, the motor starts, and by revolving the other portion of the hunting switch breaks this contact, and so comes to rest. If, however, the rotator continues to revolve, the motor will continue to run at a speed directly proportional to the speed of the rotator.

The recorder is mounted on a frame about 40 inches in length by 30 inches in width, on which frame are carried two screw spindles at right angles to each other, one of which is termed the north spindle and the other the east spindle. The north spindle is carried by a nut in which the east spindle works, and on a nut worked by the north spindle is fixed a time printing wheel. The north and east spindles are operatively connected with a "pelorus."

The mechanism controlling the pelorus is driven by a motor synchronized with the motor on the transmitter. By this arrangement, therefore, the travel of the timewheel is directly proportional to the distance traversed by the ship, quite independently of the direction in which the timewheel travels.

Consequently, as the direction of travel of the timewheel is controlled by the position of the pelorus relatively to the index, the line traced by the timewheel is, in length, directly proportional to the speed of the ship, and its direction is that indicated by the pelorus, namely, the course.

The timewheel is a circular brass wheel about four inches in diameter, having on its periphery numerals from I. to XII. representing hours, each hour being divided into quarters. Normally, this wheel is held away from the paper by a spring, but every 15 minutes an electric current is transmitted by a clock, which forms part of the apparatus, to an electro-magnet. This causes the wheel to press against the paper and the time as shown by the clock is recorded thereon. The wheel has a ratchet wheel fast with it, with 48 teeth, engaging a pawl. As soon therefore as the magnet has depressed the wheel to print, the spring withdraws it, and the pawl turns the wheel one forty-eighth of a revolution, ready for the next impression. The printing wheel is inked by a spool, against which it bears when at rest. The course is indicated by a series of dots printed by the timewheel. At every fourth dot the hour is also printed. By this means it is possible to obtain a more accurate result

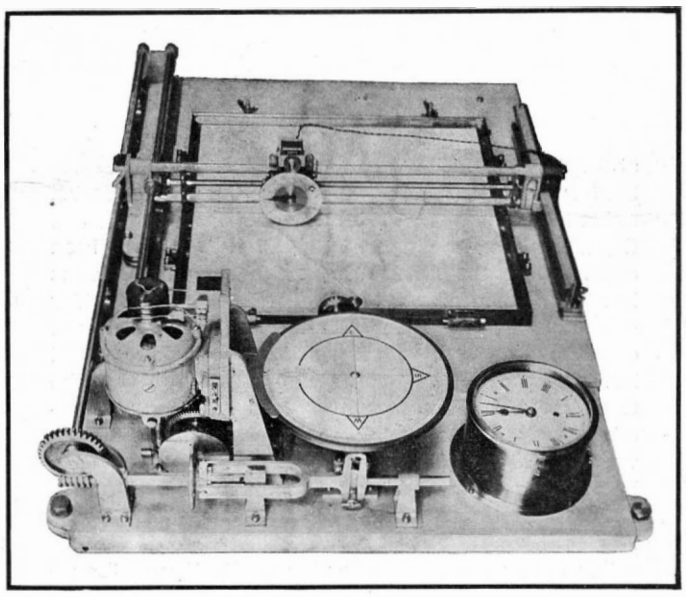

A View of the Recorder with Motor, Pelorus and Clock in the Foreground; the Time-Printing Wheel is Shown Over the Paper.

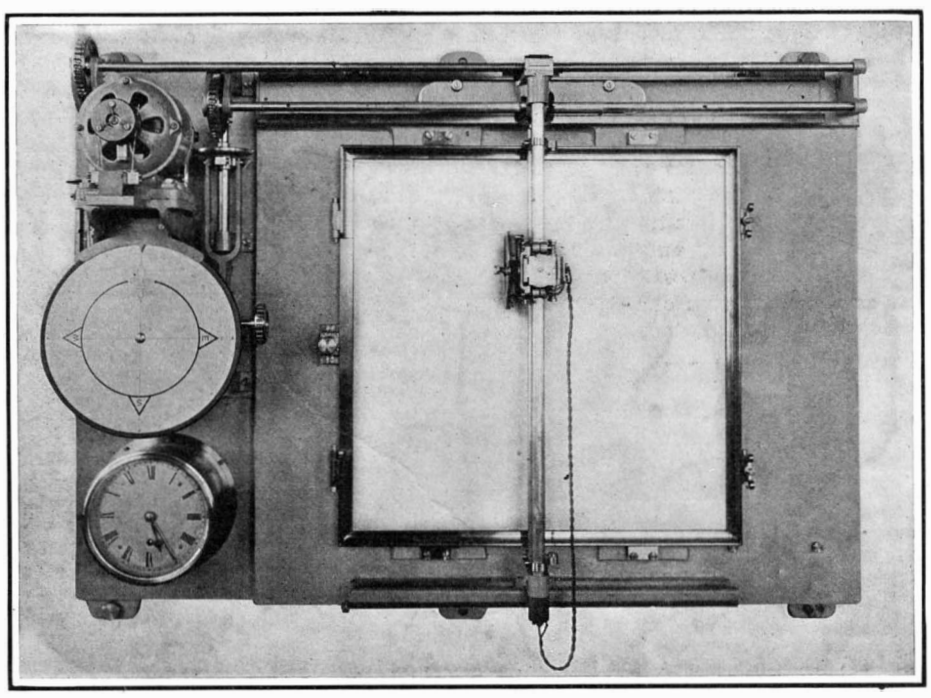

Plan View of the Recorder, Showing the Rectangularly Disposed Spindles, One of Which Carries a Time-Printing Wheel by Which a Record of the Ship's Course is Plotted on the Paper.

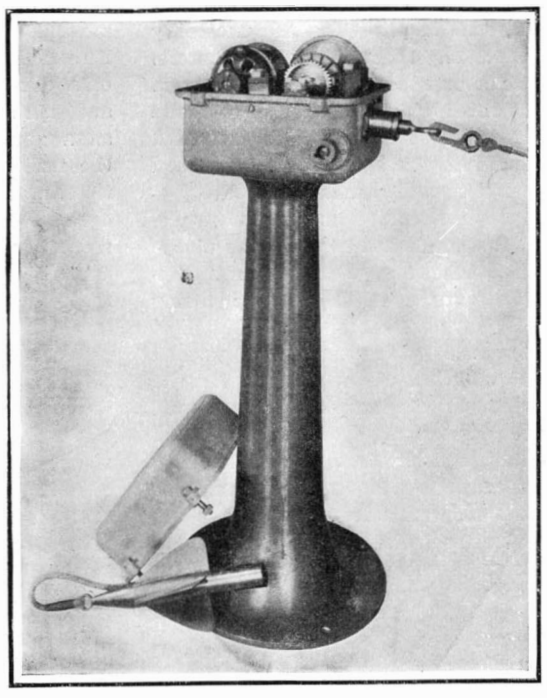

The Transmitter Which is Operated by a Log-Line and is Electrically Connected With the Recorder in the Chart-Room.

ELECTRIC DEAD RECKONER IN USE ON YACHT "VALHALLA."

The Atchison, Topeka, and Santa Fé Railway Company is laying some portions of its road with rails weighing 101 pounds a yard. These rails have a foot 6 inches broad, and it is thought this may render the interposition of steel plates between rail and sleeper entirely unnecessary. The fish plates used with these rails are constructed so as to embrace the foot closely. The practice of this line is to place the nuts that secure the bolts of the fish-plates alternately inside and outside the rail.

than is attainable with a pen or pencil for tracing the course. The "course and distance" are reckoned between the first and last dot, and therefore a continuous line is unnecessary.

The clock attached to the instrument has an eight-day movement, and at every 15 minutes sends an impulse of electricity to the electro-magnet controlling the timewheel. It has to be set to "ship's time" at noon every day.

In steamships, where it is the custom to calculate the distance run from the revolutions of the propeller, the transmitter can be driven from the propeller shaft instead of by a rotator. A mark is made on one of the disks driven by the motor on the recorder. By counting the revolutions of this disk in a predetermined number of seconds (43 seconds in the present case) the speed in miles per hour at which the ship is moving can be ascertained at any moment.

The operation of the "dead reckoner" is quite simple. In the first place, the navigator throws the rotator overboard and connects it to the transmitter, fixes a sheet of paper in the frame holder, and slides it into position for action. The clock is then set going, and set "ship's time." The timewheel is also made to agree with the clock. The nuts of the north and east spindles are released and the timewheel placed in the starting position. The transmitter is set in motion by the turning of the key. This switches on the current, and clutches the rotator to the hunting switch.

To obtain the dead reckoning, it is first of all necessary to note the ship's head by compass. The pelorus is then set to this course. To make any correction for deviation, the pelorus is moved in the direction indicated on the instrument according as to whether the deviation is easterly or westerly.

For the purpose of taking out "course" and "distance made," the first dot (i. e. "position left") on diagram is connected to the last dot (i. e. "position in") by a line. The length of this line is measured on the scale, and the result is "the distance." By carrying this line by means of the parallel ruler to the compass card on the diagram, the course is obtained. To plot this result on the card from "position left" on chart, lay off "course" (magnetic). Then one leg of dividers is placed on the side scale of the chart at about "mid lat." and half the "distance" toward north is measured. Then the other leg of the dividers is placed in the point thus reached, and the first leg extended toward south to a point equal to half the "distance" from central point. The dividers then show total "distance." By placing one point of dividers on "position left" on chart, and the other point on "course" line, the "position in" is gained. Similarly, "difference of latitude" and "departure" can be ascertained.

HISTORY AND PRESENT STATUS OF THE PANAMA CANAL.

In tracing the history of the construction of the present Panama Canal we must go back to the year 1879, when an international congress met in Paris and recommended the building of a sea-level canal from Colon on the Atlantic to Panama on the Pacific. Although many members of the congress considered that a canal with locks was the most advisable type to build, the influence of M. de Lesseps prevailed, and a sea-level route was adopted. It was estimated that such a canal could be completed in twelve years, at a cost, including interest on capital, of $240,000,000. Work was begun in 1881, and at the outset the funds of the company were called upon heavily for the vast amount of plant that had to be purchased and placed along the line of the canal, and in providing the necessary shelter and conveniences for fifteen thousand laborers.

Work was no sooner commenced than troubles began. Climatic and topographical difficulties began to make themselves felt. For 25 miles the route of the canal followed the river Chagres, which in the rainy season is subjected to enormous freshets, and inadequate provision had been made for controlling these floods. As the excavation of the 8-mile cut through the divide proceeded, it was found that the ground was of an unstable character, and disastrous slides occurred, filling the cut as fast as it was excavated. Then the first opening of the surface soil along the route induced an appalling amount of sickness, and gradually the conviction forced itself upon the company that the task of building a sea-level canal was beyond their powers, being for them, at least, both physically and financially impossible. The company abandoned the scheme for a sea-level canal, and adopted a less expensive plan, which called for summit elevation and the provision of locks. But the change was made too late, and in 1889, after $156,400,000 had been expended, a receiver was appointed. The commission which was appointed to examine the company's affairs found that there had been an enormous amount of mismanagement and misappropriation of money; but they stated that the vast amount of machinery on hand, the engineering data procured, and the labor actually done on excavation and embankment, were worth to any new company at least $90,000,000. A further extension of time was received from Colombia, carrying the date of completion to 1904, and a still later concession extended the date to the year 1910.

In the autumn of 1894, a new company with a cash capital of $13,000,000 was formed to complete the canal. On coming into possession, they very wisely determined to make a most thorough engineering examination of the problem, and asked for the appointment of a technical commission composed of eminent engineers of different nationalities, whose experience in engineering work of this kind gave them special qualification for passing upon the surveys and plans, which were being made upon a most elaborate scale by the engineers of the new company. This commission presented a unanimous report in December, 1898, which, considering the standing and experience of the members, was considered to be one of the most representative and authoritative documents of the kind ever drawn up.

The international commission found that the work on the canal with locks, as outlined below, was at that time two-fifths completed, and that it would cost $87,000,000, or with twenty per cent for contingencies $102,400,000, to complete the work, the time required being estimated at from eight to ten years. The route of the canal, as approved in the amended plans of the commission, is about the same as that which will be followed by the canal, under whatever plans it may finally be completed. Its total length is 49 miles. The plan recommended by the commission has a summit level of 68 feet. A canal with two other summit levels, one at 96¾ feet, and the other of 32¾ feet, was considered, but the 68-foot level was chosen. In these plans the Chagres River was controlled by constructing two large dams, one at Alhajuela in the upper Chagres, about 9 1-3 miles above the canal, and the other at Bohio, at the end of the sea-level length of the canal at the Atlantic side. The Alhajuela dam was to serve as a source of power and of water supply for the summit level, and the Bohio dam, 1,286 feet in length, was intended to create an artificial lake to extend 13½ miles from Bohio to Obispo, with the channel of the canal dredged in the bed of the lake. The Bohio dam was intended to serve the double purpose of containing and controlling the flood waters of the Chagres, and reducing the amount of excavation necessary for the canal.

The route of the canal as thus located, and probably to be ultimately followed, is as follows: Commencing at Colon on the Atlantic, the first section, 15 miles in length, is tidal up to the site for the proposed locks at Bohio, by which vessels would be admitted to the lake formed by the Bohio dam. Of this tide-level stretch of the canal, the first 12 miles are navigable, the depth varying from 16 to 29.5 feet. It has been excavated to the original width, and a portion of it has been dredged to the depth of 29.5 feet originally determined upon. After passing the locks, the canal channel, according to the commission's plan, would have extended for 13½ miles along the bed of the lake to Obispo. Here another lift would have carried vessels to the summit level, 5 miles in length, with an elevation of 68 feet above mean sea level. Descent to the Pacific was to have been made by locks at Paraiso, Pedro Miguel, and at Miraflores, where vessels would reach tide level on the Pacific.

In the few years following the publication of the report of the international commission, the question of the advisability of the United States building an isthmian canal connecting the two oceans was fully realized, and public interest was greatly stimulated when it was understood that the French people were seriously considering the completion of the Panama canal. At that time it was popularly supposed that if the United States government undertook the construction of a canal, it would build it on the Nicaragua route, and there was a disposition to push the matter through as a government enterprise with all the speed that the nation's resources could guarantee. At the same time, the reports as to the feasibility of the Nicaragua canal which were made about this time by the government engineers, were distinctly unfavorable, and the confidence of the public in the possibility of building the Nicaragua canal for the sum of money estimated, and within the time specified, began to be rudely shaken. At the same time, the new Panama Canal Company, realizing that the construction of another canal at Nicaragua would seriously imperil the financial success of their own canal, strongly urged the American people to consider the superior advantages of the Panama to the Nicaragua route. From the very first the Scientific American took a decided stand in favor of Panama; for a careful consideration of the two schemes satisfied this journal that, judged both from the standpoint of feasibility and cost of construction, and convenience and safety of operation, the Panama route was greatly superior.

The mere statement of the comparative elements of importance in the two canals shows at once the superior advantages of the Panama route for an isthmian canal. The total length of the Panama canal is less than 50 miles, whereas the length of Nicaragua canal is 186 miles. In the Nicaragua canal there would have been 50 miles of curvature, with a total of 2,339 degrees; whereas at Panama the total length of curvature is only 23 miles, and the total number of degrees 771; while as for the time occupied in transit, a 400-foot ship would take 11¼ hours to pass through the Panama canal, as against 33 hours to pass from ocean to ocean by way of Nicaragua.

The Isthmian Canal Commission appointed by the President to investigate the whole question, after a careful investigation of both routes by its own parties of engineers and a careful study of the records and plans of the two companies, strongly recommended the Panama route. They estimated that the work already done at Panama, the Panama Railroad, the maps, drawings, etc., and the working plant, were worth to the United States not more than $40,000,000. Without going at any length into the history of the legislation in Congress, and the negotiations with the Panama Canal Company, and with the Colombian government, it is sufficient to say that the canal was purchased for the sum named, and the Colombian government received $10,000,000 for the purchase of a strip of land extending five miles on each side of the route of the canal from ocean to ocean. A commission was appointed to take hold of the project, undertake the government of the canal zone, make a start in the preliminary work of sanitation, and prosecute a thorough engineering survey, upon which it would be possible to determine the final plans for the completion of the great work.

It was soon discovered that the composition of the commission was somewhat cumbersome, and not calculated to give the best results in a work of this magnitude, and accordingly President Roosevelt abolished the commission and formed a new one which, it is believed, will prove to be thoroughly adequate to the carrying through of this stupendous undertaking. The new chairman of the commission, Mr. Theodore P. Shonts, who succeeded Rear Admiral Walker, is head also of the First Department, which is concerned with the fiscal affairs of the commission and the purchase and delivery of all material and supplies. The head of the Second Department, Charles E. Magoon, is governor of the canal zone, and in addition to the administration and enforcement of law, will have in charge the important work of sanitation. He is to reside on the isthmus, and devote his entire time to the service. The head of the Third Department is the chief engineer, John F. Wallace, who is to reside on the isthmus, have charge of the actual work of construction and of the practical operation of the railroad, with the special view of its utilization in the construction of the canal. The other members of the commission are Rear Admiral Endicott, U. S. N., Brig.-Gen. Hains, U. S. A., Col. Ernst, Corps of Engineers, U. S. A., and Benjamin M. Harrod. The chairman receives a salary of $30,000 a year, the chief engineer $25,000 a year, the governor $17,500 a year, and the other commissioners $7,500 a year each. William H. Burr and William Barclay Parsons are attached to the present organization as consulting engineers, and one leading civil engineer from England, France, and Germany will also act in an advisory capacity.

The results of the elaborate surveys, and the limited amount of construction that has been carried on under the present and preceding commission, have placed the chief engineer in a position to outline in a preliminary report the probable best type and size of canal to build at the isthmus. He estimates that a canal 150 feet in width at the bottom, and providing a minimum depth of water of 35 feet, could be built with a 60-foot summit level, with locks, for $178,000,000, and that it could be completed in from seven to eight years. A canal with a 30-foot level would cost $194,000,000, and could be built in from eight to ten years; while a sea-level canal would cost $230,000,000, and could probably be completed, or at least open for use, in ten years, and certainly in twelve years' time. These estimates are based upon the time and expense of cutting through the mountain divide; and the chief engineer is satisfied, from the experience that has already been had in excavating the Culebra cut, that it would be possible to take out material at 50 cents per cubic yard. He states that a mere perfunctory management of the work might increase this cost to 60 cents or more, whereas with efficient management and the use of the best machinery, the cost might be reduced to 40 cents per yard.

The further investigation that has been made of the site of the proposed Bohio dam, shows that there is a deep gorge or depression in the natural rock at this point, which would render it necessary to carry the core wall of the dam down to a depth of at least 150 feet below sea level. Mr. Wallace, therefore, prefers in any case, whether a sea-level canal or one with locks be built, to place the dam for the control of the river Chagres flood water at Gamboa, where a satisfactory foundation can be had and suitable locations are afforded for tunnel spillways. The surplus waters would be led from this dam either to the Pacific or to the Atlantic by means of tunnels through the divide or intervening hills. It is pointed out that the con-

struction of a dam at Gamboa has this advantage over the dam at Bohio, that whereas the destruction of the Bohio dam either by floods or by the act of man in time of war, would close the canal absolutely to traffic, the destruction of the Gamboa dam would cause only temporary interruption.

An Aerial Torpedo.

A test was recently made at Rockaway Point, Long Island, of a noval projectile invented by Mr. Joseph J. McIntyre, of Brooklyn, N. Y. As the title implies, the new projectile is of the explosive type, similar to a torpedo, but arranged to be driven through air instead of water. The torpedo, which resembles a huge rocket, carries a load of steel shrapnel and a high explosive which may be detonated by a time fuse or a percussion cap. scattering the shrapnel over a wide area. A brass cylinder contains at the lower end the lifting charge by which the projectile is fired into the air. At the upper end is the shrapnel and the high explosive. Several hundred steel shrapnel bullets are used. They are cast in strips and arranged about the inside of the casing, while in the center are three sticks of dynamite. The bullets and dynamite are all incased in plaster of Paris. A percussion cap at the upper end of the cylinder explodes the charge when the projectile strikes an object. The time fuse passes up through the center of the cylinder between the sticks of dynamite. The projectile is arranged to be fired like a rocket from a tripod which may be raised or lowered to different angles, and thus regulate the distance the torpedo will cover. This may also be governed by varying the quantity of lifting charge in the cylinder. In the Rockaway Point test a small charge was used, so that the action of the projectile could more easily be followed. The rockets in this case covered only a quarter of a mile, while with full charges they would have covered a mile or more. The tests were very successful, the rockets exploding when striking the ground, tearing large holes in the sand and scattering bullets over a large area. Several rockets were also fired out to sea, and exploded on striking the water. The third test, that of exploding a rocket in mid-air with a time fuse, was also successful. Mr. McIntyre has equipped his invention with a safety device which prevents premature explosion. This permits large quantities of the rockets to be transported in perfect safety.

World's Power Boat Record.

The official world's record for a power boat has been established by the "Napier II.," of Great Britain. This boat competed in several contests last year, but her performances were not considered satisfactory, although every indication of speed was manifested. It was therefore handed over again to the builders, Messrs. Yarrow & Co., of Poplar-on-Thames, and drastic alterations have been effected in the design of the hull, which is practically a new structure. Officially timed on the builder's recent trials the world's record for a knot was attained. Three runs were made over the measured mile, the first against the tide occupying 2 minutes 25 seconds, which is equal to 24.827 knots or 28.57 miles per hour; the second, with the tide, took 2 minutes 14 seconds, a speed of 26.86 knots or 30.93 miles per hour; the third, also with the tide, was timed to be 2 minutes 12 3-5 seconds, a speed of 27.149 knots or 31.26 miles per hour. The conditions were not propitious for fast speed, as the boat had to contend against half a gale of wind. The mean pace of the first and last runs, with and against the tide, is 25.988 knots or 29.925 miles an hour. For a 40-foot boat this is a meritorious performance. The previous best speed was attained by "Trefle-à-Quatre" at Juvisy, when 22.7 knots were recorded. "Napier II." is reconstructed upon original lines. It is perfectly flat-bottomed, with the sides of the bows perfectly perpendicular. The boat is propelled by two four-cylinder engines each developing 60 horse-power driving twin screws. At full speed the craft rides with about 6 feet of her bows out of the water, but makes very little wash.

The Current Supplement.

The current SUPPLEMENT, No. 1535, is opened with an excellent article on the car-ferry steamer "Detroit" of the Michigan Central Railroad. Rear-Admiral George W. Melville contributes a splendid review of the epochs in marine engineering. A technological article of interest is that on the manufacture of bronze colors. The artificial production of rubies is described and likewise illustrated. Steel-hardening metals have become of such importance, that Joseph Hyde Pratt's discussion of the subject will be followed with interest. Inventors will find of value an article on distance control by electric waves. Producer-Gas Power Plants is a subject which is fully discussed by A. Frederick Collins. Prof. Blondlot's puzzling discovery of the N-rays is made the subject of exhaustive inquiry by C. G. Abbot. The usual electrical notes, engineering notes, **and trade notes and recipes are to be found in their accustomed places.**

Automobile Notes.

In view of the recent lowering of the 1,000-mile non-stop track record 4 hours, 3 minutes, and 36 seconds by Charles Wridgeway on a Peerless car, further attempts at cutting the new time of 25 hours, 50 minutes, and 1 second will doubtless soon be made, and automobile enthusiasts will probably have a chance to witness several more such tests during the summer. Wridgeway covered 934 miles in 24 hours, or 123 miles more than the Packard machine, driven by Schmidt, made in the same time last summer. His average speed was about 39½ miles an hour. The car was run at an even rate following the indications of a speedometer. The only mishap was the breaking off of the exhaust pipe at the end of the twenty-second hour. The right-hand front wheel was changed four times because of the constant great strain upon it and its tire. The motor, however, did not stop during these or any of the other stops for supplies.

An overland long-distance endurance test of two Oldsmobile runabouts is now under way. The two machines started from New York on May 8 and are expected to arrive in Portland, Ore., on or before June 21, or within 42 days. The driver of the first machine to arrive is to receive a $1,000 prize. The runabouts will be the first machines to have crossed the continent from east to west. The drivers expect to attend the Good Roads Convention at the Lewis and Clark Exposition, to the president of which they are carrying messages. The machines reached Des Moines, Iowa, on May 20, after having encountered muddy and flooded roads in Illinois and Indiana and being pulled through Skunk River marshes with a block and tackle, during which passage they were completely submerged. They started from Omaha, Neb., on the 25th after spending one and one-half days there getting extra gasoline tanks fitted and preparing for the rest of the journey, during which they will cross Nebraska, Wyoming, and Oregon.

The opening of the track racing season in the vicinity of New York occurred on May 6 at Brighton Beach. The chief excitement of the day was furnished by the remodeled Ross steamer, which performed so successfully at Ormond last winter. Driven by Joe Nelson, this machine, which has been christened the "Lightning Bug," ran through the fence and was damaged considerably, though Nelson fortunately escaped injury. Besides a 5-mile exhibition performance by Walter Christie on his front-drive racer, there were no other specially interesting performances. The first meet at Morris Park—the new automobile race track—resulted in the cutting of one-fifth of a second off Barney Oldfield's old track record of a mile in 53 seconds. The new time was made by William Wallace's 90-horse-power Fiat. The new White steam racer did a mile in 53 seconds, and took second place in a 3-mile free-for-all race, which was won by Chevrolet on the Fiat in 2:51 4-5. The track was not in very good condition, it being too soft and not sufficiently banked at the sharp turn.

The first hill-climbing contest to be held this season took place at Springfield, Mass., recently, where a new Grout steam racer covered the 2,175 feet up a 9 to 12 per cent grade in 34 seconds. This new racer is fitted with two boilers and a 50-horse-power steam engine. The next best time for the hill was made by a 60-horse-power Napier car, which took 1 3-5 seconds longer to make the ascent. A Ford, a Reo, a Stevens-Duryea, and a large Columbia won first place in their respective classes, their times being in order, 57 3-5, 54 4-5, 47 2-5, and 41 1-5 seconds. A double opposed-cylinder Buick car made the climb with four passengers aboard in 50 1-5 seconds.

An automobile street cleaner is being placed on the market by an English firm of motor manufacturers. The vehicle is not only propelled by a gasoline motor, but is provided with four separate attachments, each of which is operated by the motor, and is designed for a special function. These comprise a rake to loosen caked mud upon the surface of the road, squeegees for use in wet weather, a revolving brush to clean up surface rubbish or dust, and a set of overlapping scrapers to complete the cleansing work. The revolving brush is so arranged that the dust and rubbish which it removes is deposited in a special receptacle, and no dust is raised in the air. This is a conspicuous advantage over the existing machine of this type, which can only be used at night time, when pedestrian traffic is practically nil, owing to the excessive contamination of the air by dust particles. The motor vehicle costs about $4,000, but working at an average speed of eight miles an hour, and being so varied in its operations, can carry out the work of some fifty men. These machines are to be introduced in English thoroughfares during the coming summer.

In making an electric furnace, according to Engineering Record, with limestone blocks, it is necessary to dry them in a stove or otherwise for 10 to 24 hours, as the least moisture will cause a block to crack when subjected to the heat of the arc.

Correspondence.

Why the Stone Ball Moves.

To the Editor of the SCIENTIFIC AMERICAN:

Concerning the spontaneously moving stone ball at Marion, Ohio, noticed in the SCIENTIFIC AMERICAN for April 15, assuming its description to be free from error, permit me to suggest that such a movement must be due to some artificial cause or to the axial rotation of the earth.

If to the latter, its direction should be somewhat to the east of south, its southerly motion being due to centrifugal action, while its easterly deflection should be the result of a "throw," due to the velocity of terrestrial rotation in that latitude, which should vary but little from 800 miles per hour; the actual direction of the rotation of the ball being the resultant of these, modified by friction.

Akron, N. Y., May 19, 1905. JULIUS PETERSON.

The Stone Ball Again.

To the Editor of the SCIENTIFIC AMERICAN:

We were very much interested in the moving ball described in your issue of April 15, and think there is another probable cause not given, at least we have not noticed it referred to, viz., the capillary attraction hypothesis; and assume that the ball does not fit the socket perfectly, leaving a space to be filled with water, frequently by rain and dew distilled at night, which would be drawn up by the force of capillary attraction between the cup and ball, and this film of water would be evaporated by the sun's rays on the south side first, and the ball drop to that side, causing the ball to move from north to south, just as we find taking place in the instance referred to.

Oshawa, Ont., May 23, 1905. J. W. PROVAN.

An Automobile for Market Gardeners.

To the Editor of the SCIENTIFIC AMERICAN:

The market gardeners and farmers of the country, and particularly the market gardeners, need an automobile for working the soil. To one who reads the papers devoted to agriculture regularly this will seem to be at first glance a ridiculous statement, because the farm papers, almost without exception, denounce the automobile. Nevertheless, the machine for working the soil is needed, and a sale can be made of the right kind of a machine in spite of prejudice. Let me specify some of the features that such a machine should have.

That it should be simple in construction is, of course, the first of all the requisites. It should then be small, so as to require but little space at the end of a furrow. It should be easily steered, and turn within its own length. The width of tread should be variable. The rims of the wheels should connect with the hubs by means of sheet-metal plates instead of spokes. The width of tire should be about five inches. The whole machine should weigh as little as possible consistent with strength. It should be geared to run at two speeds, if not three. The motor should be designed so that it could be disconnected from the wheels of the machine, and used for the numerous purposes for which motors are wanted on the farm, such as thrashing and pumping. The machine must be arranged to drag all kinds of farm implements, and to haul the crop to market. If it were able to do service as a carriage as well, so much the better.

In proof that such a machine can be sold in spite of prejudice, consider this one fact: Gardeners now plant many vegetables in rows three feet apart, that might better be planted a foot apart. The wide spaces are required because a horse must be used to cultivate the vegetables. I have heard of spaces two feet wide between rows being cultivated by a horse, but I never saw it done. A well-built machine could travel between rows a foot apart, or at worst fifteen inches apart, and that is to say that an automobile cultivator would just about double the truck crop that can be raised on an acre of ground.

When the late W. W. Huntley, of Silver Creek, N. Y., began making bran dusters to take flour out of bran, the millers laughed at him. They said to take out the flour would spoil the sale of the bran. But Huntley persuaded one, here and there, to try the machine, and he agreed to take the flour thus saved during a stated period as pay for the machine. That always sold the machine. In like manner place a well-designed automobile in the hands of a reputable truck-grower, and the machine will sell itself. Where is the manufacturer who will first occupy this field?

Northwood, N. Y., May 22, 1905. JOHN R. SPEARS.

The Crater of Kilauea.

A correspondent located at Hilo, Hawaii, informs us of two heavy earthquakes occurring there early in May, and of the great activity of Kilauea crater. Two fountains of lava were playing in the bottom of the crater pit, causing a large flow of lava, making an interesting sight for tourists.

THE GRUBB GUN-SIGHT.

A collimating telescopic gun-sight has been invented by Sir Howard Grubb, which departs so radically from the usual type of sight, that a brief description of its salient features may not be without interest.

As shown in Fig. 6 of the accompanying illustrations, the sight consists of a short metallic tube, the rear end of which is closed by a window of parallel plate glass, the lower portion of which is silvered on the inside, while the upper portion is left perfectly transparent. The front end of the tube is closed by a curved glass, the concave surface of which is coated with a chemically-deposited film, which is both semi-transparent and highly reflective. The curved glass, therefore, acts as a transmitter and a reflector of light. The tube is formed at the top into a hood containing a glass diaphragm covered with an opaque coating, on which is cut a cross.

no necessity for a back sight, which is a very important advantage in itself if the weapon is to be handled in a strained position.

That the virtual or ghost image of the cross is really formed at or near the plane of the object aimed at, is proved by the small photograph in the lower right-hand corner of Fig. 1. The photograph was obtained by placing the camera a few feet behind the sight, focusing on the framework of the sight, and exposing the plate. As shown in the picture, the sight body itself is quite indistinct, but the distant views of the dome and the cross are both quite clear, proving that this ghost image of the cross is practically in the plane of the distant dome. In looking through the sight, the object aimed at is seen as distinctly as with any open sight, except for the very slight loss of light occasioned by the semi-transparent film.

Much of the difficulty experienced by novices depends

respect it has an advantage over the ordinary telescopic sight, in which accuracy and constancy of adjustment are most essential.

In the accompanying illustrations, Figs. 1 and 2 show the Grubb sight adapted for use with a six-pounder naval mounting. The bracket for the sight is constructed so as to fit on the mounting after the removal of the ordinary tangent sight. The appliance is mounted on the top of a radial rack securely held by and capable of sliding in a socket formed in the sight bracket. A worm wheel and pinion gear serve to elevate the sight rack. Deflection of the sight is arranged for, and consists in training the sight around a center by milled head and screw in the usual manner.

Fig. 3 shows the instrument applied to a bar sight for a twelve-pounder rapid-fire mounting. In this case the sight is carried above the ordinary back sight, and may be easily and quickly removed, held as it is by a

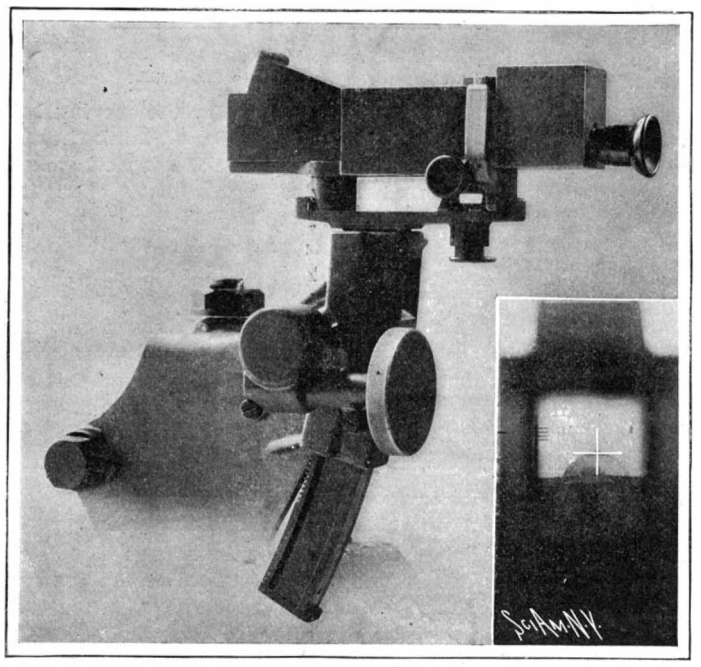

Photo. taken through a sight.

Fig. 1.—The Sight on a Six-Pounder Mounting.

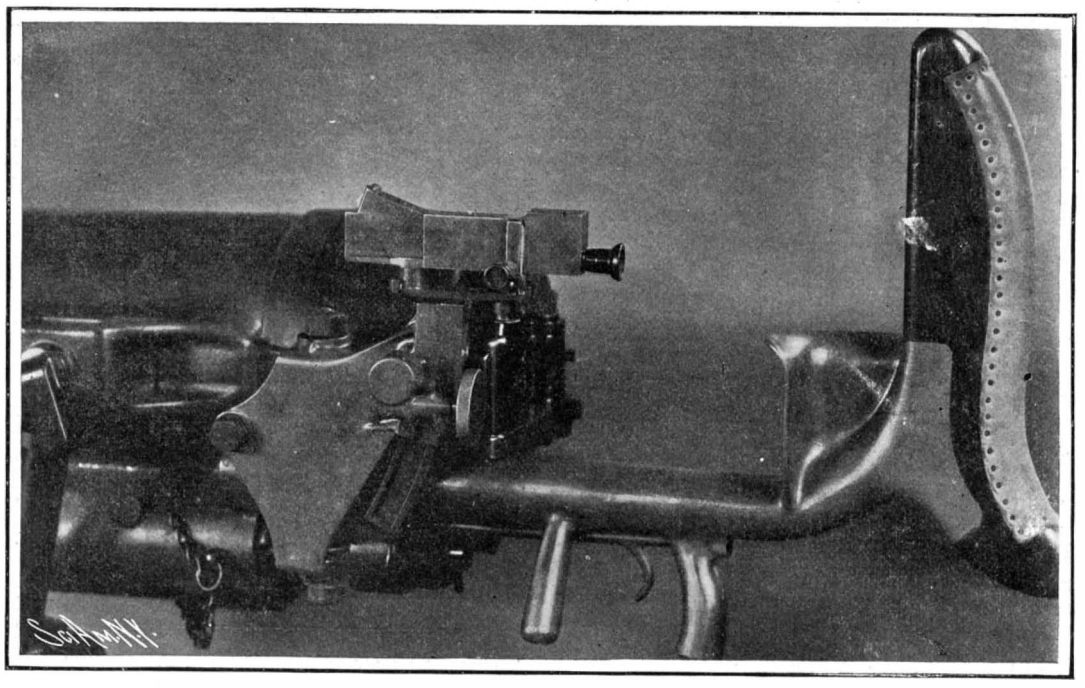

Fig. 2.—The Grubb Sight Applied to a Six-Pounder.

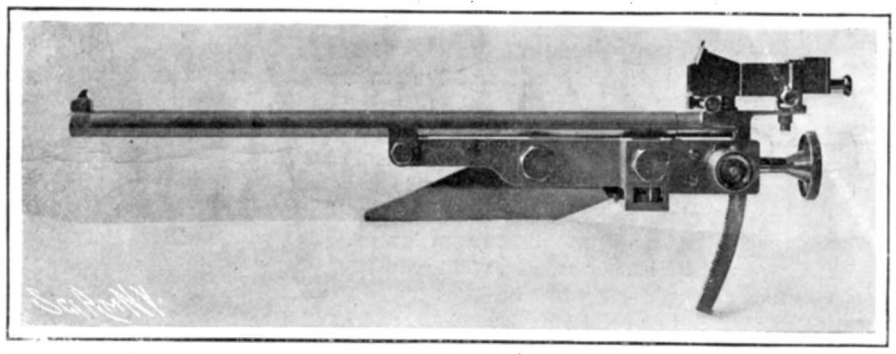

Fig. 3 —The Sight Applied to a Twelve-Pounder Rapid-Fire Mounting.

Fig. 4.- The Grubb Sight Applied to a British Service Weapon.

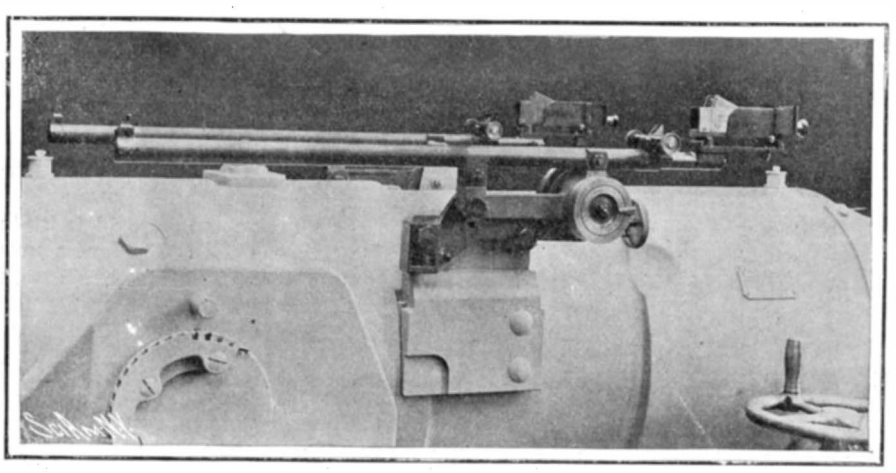

Fig. 5.—Grubb Sight on a Six-Inch Rapid-Fire Gun.

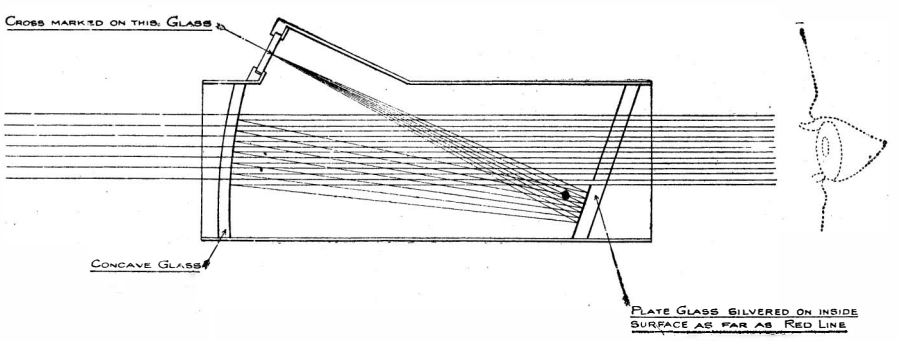

Fig. 6.—Optical Principle of the Grubb Sight.

A NEW GUN-SIGHT WHICH DOES AWAY WITH THE ORDINARY FORESIGHT.

The manner in which this optical system works is well shown in Fig. 6. The rays emanating from the target are transmitted both through the front and back windows without refraction, and enter the eye exactly as if there were no sight at all. On the other hand, the rays which enter the eye to form the image of the cross diverge, and are reflected from the silvered portion of the back window onto the concave surface of the front window which, being coated with a reflective film, diverts the rays in question through the transparent upper part of the back window, and thus to the observer's eye. Because of the peculiar curvature of the front window, the rays of the cross are parallelized after reflection, so that they enter the eye as if they had emanated from a large cross on the distant object itself. The cross is, therefore, optically superimposed on the target.

Since the observer's eye is absolutely fixed, there is upon the impossibility of seeing the ordinary foresight of the rifle simultaneously with the target. In the case of the instrument we have just described, the foresight can be completely discarded.

Although this sight is not a telescopic sight in the true sense of the word, it can be made to magnify, if desired, and that without some of the disadvantages of ordinary magnification. Just as it is possible to focus both object and cross on a photographic plate, so also is it possible to focus both in a field glass and a telescope. The larger patterns of the sight (used for field and naval guns and guns of position) are also supplied with attachments for monoculars and binoculars. The telescope, however, in this case is used simply as a means of magnification of both object and cross, and any error of adjustment or looseness in the lenses in no way affects the accuracy of the sighting, because it affects both the object and the cross equally. In this bayonet joint arrangement and a small spring catch.

Fig. 4 shows the sight fitted to a British 0.303 service rifle. The sight does not interfere at all with the ordinary sights, because it is mounted to slide on the face of an arc on the left-hand side of the rifle. The top of this arch is notched, and the notches are cut to correspond with given ranges engraved on the arc. A spring catch holds the sight at any of the notches, adjustment of range being effected by sliding the sight along the arc.

In Fig. 5 the Grubb sight is shown fitted in conjunction with a bar sight of a six-inch rapid-fire mounting, the Grubb sight being carried on an extension of the ordinary sight bar, so that it is to the rear and slightly above the ordinary back sight.

It is calculated that the mass of the solar corona is not necessarily greater than 25,000,000 tons.

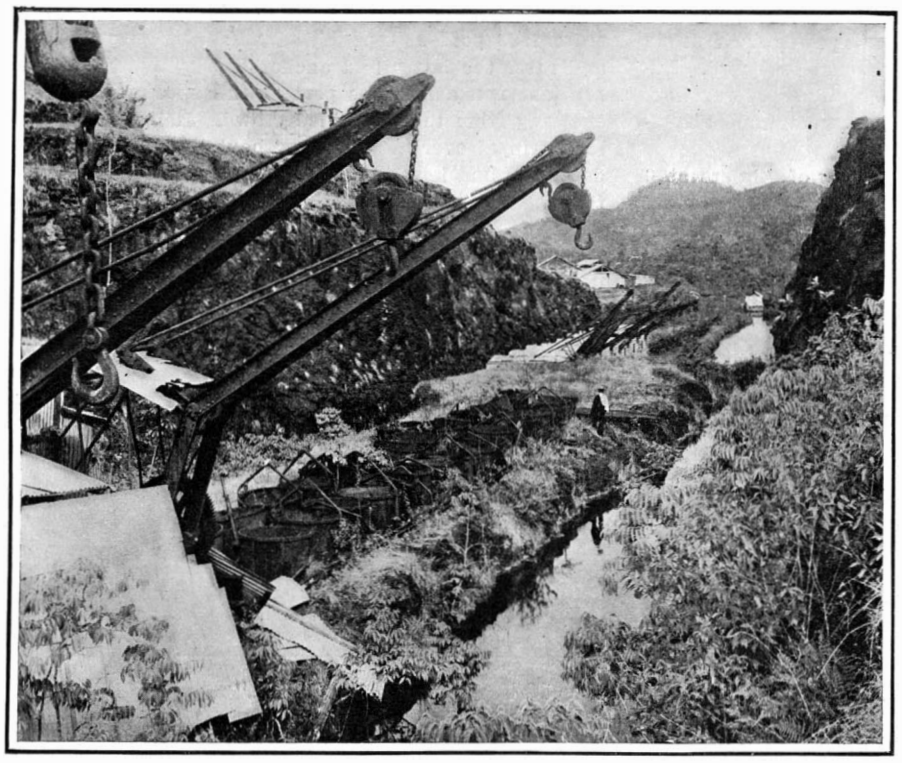

An Uncompleted Cut, Showing French Excavating Plant Still Available.

Rock Excavation in the Culebra Cut.

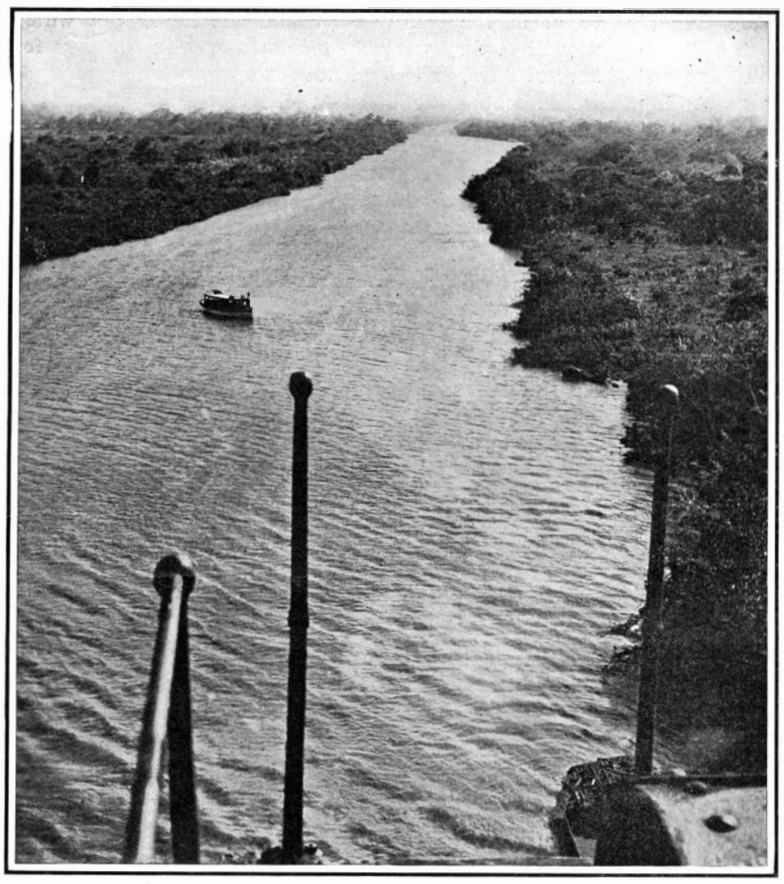

Partially Excavated Portion of the Canal at Atlantic End.

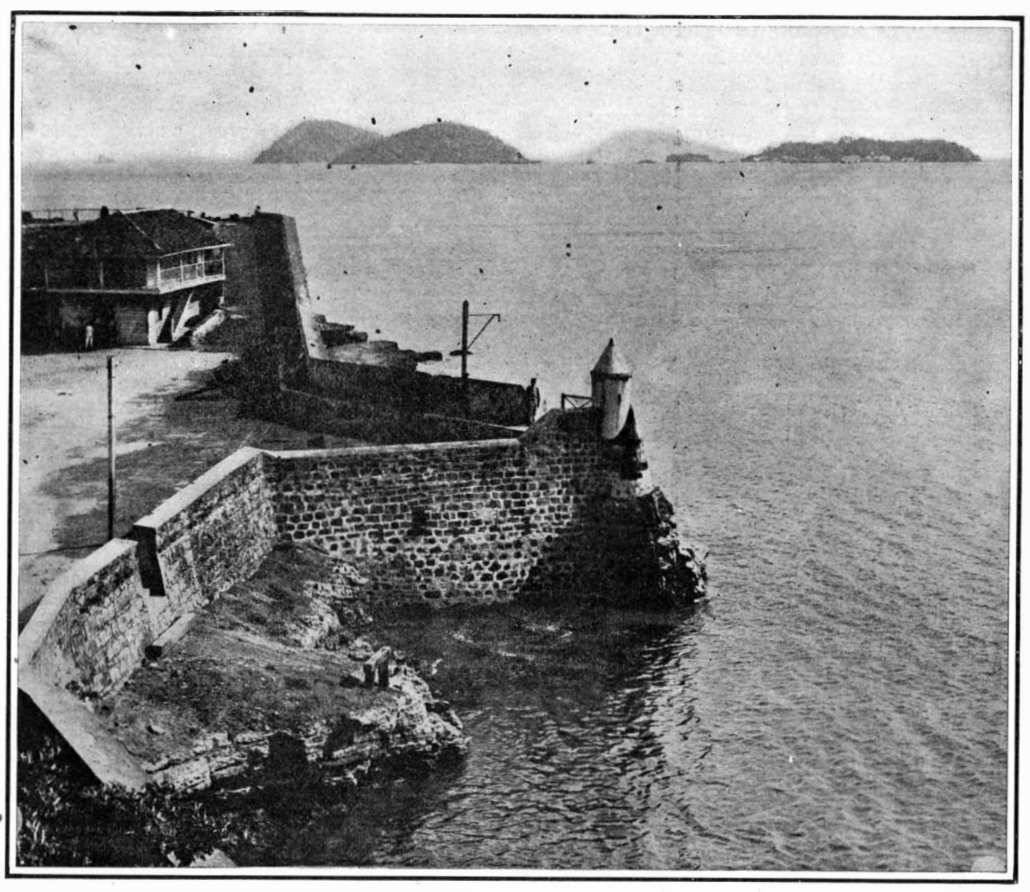

Old Spanish Fort and Islands at the Pacific Entrance.

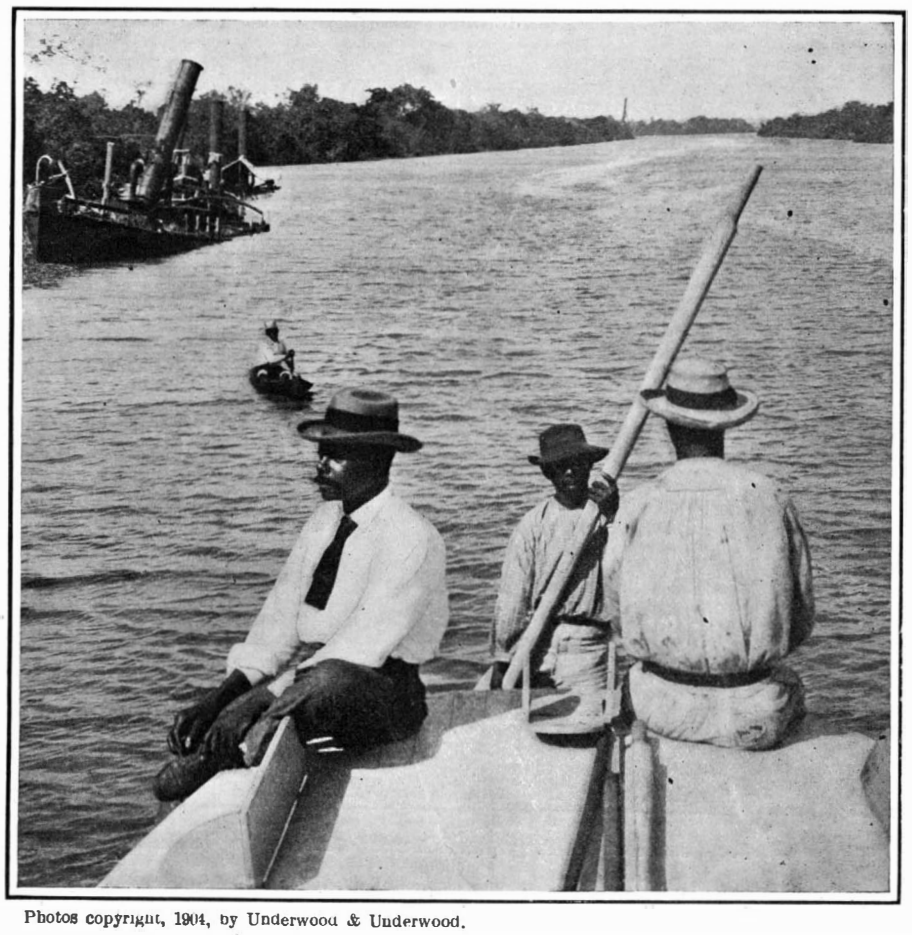

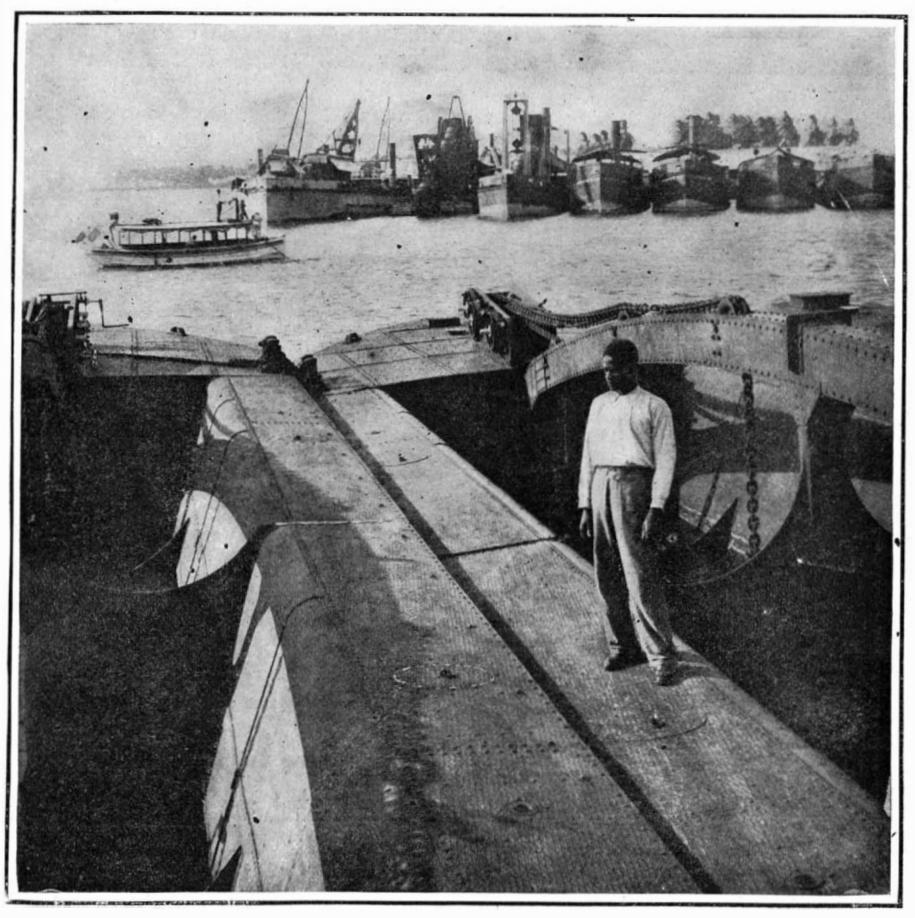

Photos copyright, 1904, by Underwood & Underwood.

By Launch up the Excavated Portion of the Canal.

Part of the Old Company's Plant.

HISTORY AND PRESENT STATUS OF THE PANAMA CANAL.—[See page 442.]

THE ALGIERS-TOULON MOTOR-BOAT RACE.

BY THE PARIS CORRESPONDENT OF THE SCIENTIFIC AMERICAN.

The Algiers-Toulon race was organized in the first place by the Matin, one of the leading Paris journals. Then followed the cup offered by M. Charley, the Paris representative of the Mercedes automobile company. The French Minister of the Marine offered a prize, and also lent his aid to the event, and allotted a torpedo destroyer to accompany each of the racers. This encouraged the constructors to build a type of especially heavy racing boat, adapted to run in the open sea. The racers varied from 30 to 80 feet in length, and the motors ranged from 35 to 200 horse-power. The smallest boat was the Italian racer "Fiat," which measured 30 feet in length, while the largest, the "Quand-Meme," owned by the Duc Decazes, was 73.46 feet long, 9.84-foot beam and 1.05-foot draft, and fitted with two motors of 100 horse-power and driving twin screws. The "Camille," a Paris-built racer of 60 horse-power and 43 feet length, was piloted by Madame du Gast, the well-known sportswoman. The "Heracles II." was built of mahogany. It had a double hull, with tarred paper between the layers. The machinery was well protected by a liberal deck. The boat was 35 feet long, had a 60-horse-power motor, and carried a crew of seven. The hulls of the two Mercedes boats, besides those of the "Camille" and "Heracles II.," were built by the Pitre Company in Paris. The "Mercedes C. P." had a 45-foot steel hull and a 90-horse-power Mercedes motor. She carried a crew of six. The "Mercedes-Mercedes" was 60 feet long, and had two 90-horse-power Mercedes motors placed in line, one behind the other, and driving a single propeller. This boat was provided with a mast and smokestack and carried a crew of five. The "Malgré Tout" was 65 feet long, 11 feet beam, and had a 6-foot draft. Its weight was 14½ tons, 5 tons of which was due to a heavy cast-iron keel. It was rigged as a yawl, and carried 170 square yards of canvas. Both the 120-horse-power motor and the boat itself were built by M. Roche. The crew consisted of six men. The "Quand-Meme," as can be seen from the illustration, was the largest and handsomest boat of the lot. It weighed 15 tons, and had a draft of 4 feet. Two Beaudoin motors of 100 horse-power each drove twin screws. This boat had nine men on board. Despite the fact that she carried 700 gallons of gasoline, lack of fuel was one of the causes for her final abandonment.

The start took place from the port of Algiers at 6 o'clock in the morning, led off by the "Quand-Meme." Then, at intervals of a few minutes, came the "Mercedes C. P.," the "Mercedes-Mercedes," the "Fiat," the "Camille," the "Malgré Tout," and the "Heracles II." The time was taken upon one of the large torpedo destroyers, which lay at the mouth of the port, as the boats passed by at full speed. The line of boats was preceded by "La Hire" and followed by the "Mousqueton," while the battleships "Kleber" and "Desaix" accompanied the fleet on the passage. A few of the motor boats, such as the "Heracles II." and the "Malgré Tout," hoisted their sails at the start, while the rest ran with the motor alone. They soon disappeared in the distance.

Six of the boats succeeded in arriving at Mahon in good order. First came the "Fiat" at 6:15 P. M., it having made the 195 nautical miles (224.79 statute miles) from Algiers to Mahon in a little over 12 hours, with an average speed of 16 knots (18.54 statute miles) an hour. Then followed the "Camille" at 10 o'clock, taking 16 hours for the trip. Not long after came the "Mercedes C. P." at 10:43 (17 hours), then the "Mercedes-Mercedes" at 12:30 (18½ hours), and the "Quand-Meme" at 1:45 A. M. (20 hours). The "Malgré Tout" came into port towed by the "Carabine," while the "Heracles II." did not arrive until late in the morning, at 11 o'clock.

Thus the valiant little Italian boat, the "Fiat," carried off the honors of the first part of the course. It came into port accompanied by the destroyer "Arc," and after the latter had anchored, the "Fiat" made a brilliant run across the port at full speed, amid wild cheering from the assembled crowd. It had made the long trip of over 200 miles without the slightest accident, and had kept up a very regular speed. Preparations were then made for leaving Mahon, and continuing the second part of the race to Toulon. But on account of the bad weather and the heavy sea which prevailed, they were obliged to remain in the port for several days, and could not start again before May 13.

The boats started at 4 A. M. in good order, but afterward the sea became rougher. The "Fiat" had to be taken on board "La Hire" when 45 miles out from Mahon, as it passed through the smaller waves and shipped water. Then some of the other boats were taken in tow, owing to different accidents. These were the "Mercedes C. P.," the "Heracles II.," the "Malgré Tout," and, later on, the "Mercedes-Mercedes." At 10 o'clock the breeze stiffened, but the "Camille" was making good headway, as was also the "Quand-Meme." At 5 P. M. the "Camille" had to be taken in tow. The weather had been comparatively good at the start, but toward 10 A. M. the barometer fell very fast, and toward evening a violent storm came on, which was one of the worst ever seen in that region. Under these conditions most of the boats were first taken in tow, and afterward abandoned, as they could not be hoisted into the destroyers in such a heavy sea. The "Mercedes C. P.," which had been running admirably, was later towed by the "Hallebarde," but the boat was swamped in the heavy sea, and the towline had to be cut. The "Camille," also under tow, broke away and was left at the mercy of the waves. It was only with great difficulty that the battleship "Kleber" was able to save Madame du Gast and the crew. The "Malgré Tout," "Heracles II.," and "Mercedes-Mercedes" met with a similar fate, while the "Quand-Meme" was kept afloat until 5 P. M. on the 14th, when her crew were obliged to abandon her and be taken aboard the "Arbalete." Thus all the boats were lost with the exception of the

The 30-Foot Long, 5½-Foot Beam, 25-36 H.-P. "Fiat."

This boat weighs only 500 lbs. Although the smallest in the race, it made the best time, going half way across the Mediterranean Sea (225 miles) in 12 hours at an average speed of 16 knots (18.54 miles) an hour.

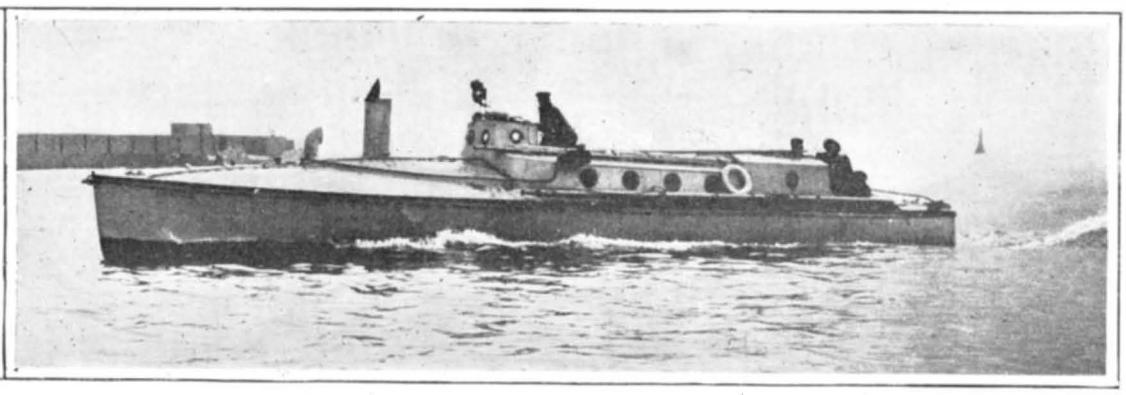

Madame du Gast Piloting the 43-Foot, 60 H.-P. "Camille."

The "Camille" reached Port Mahon second in 16 hours, or at an average speed of 12 1-5 knots (14 miles) an hour.

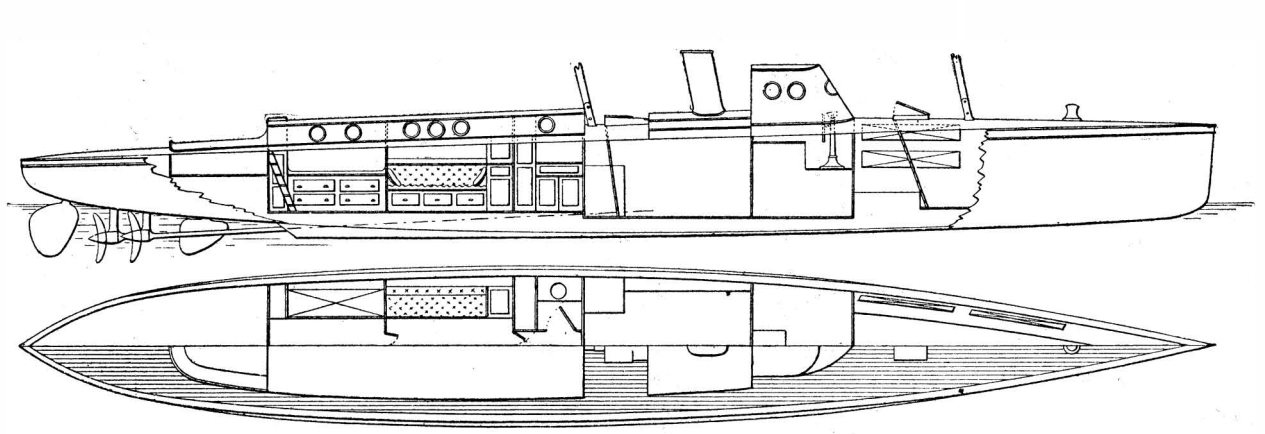

Longitudinal Section and Plan of the "Quand-Meme."

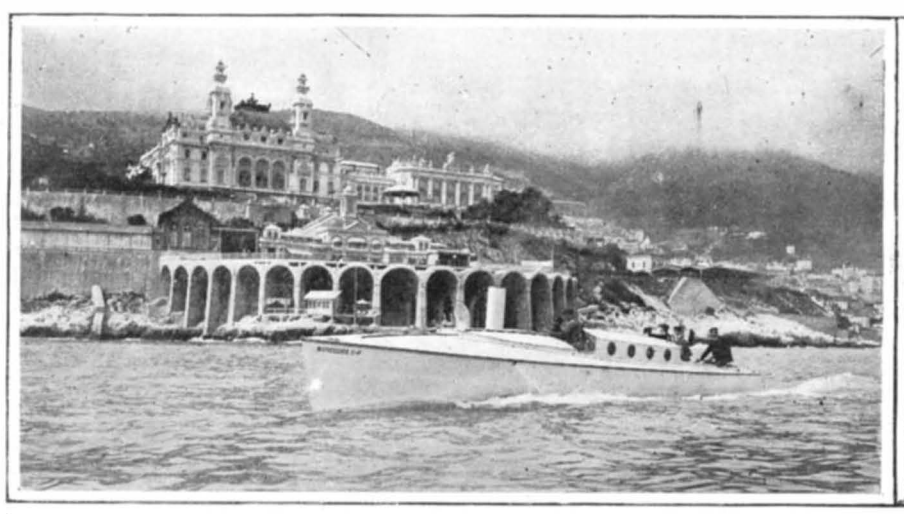

The 45-Foot, 90 H.-P. "Mercedes C. P."

This boat arrived third in 17 hours, thus making an average speed of 11½ knots (13¼ miles) an hour.

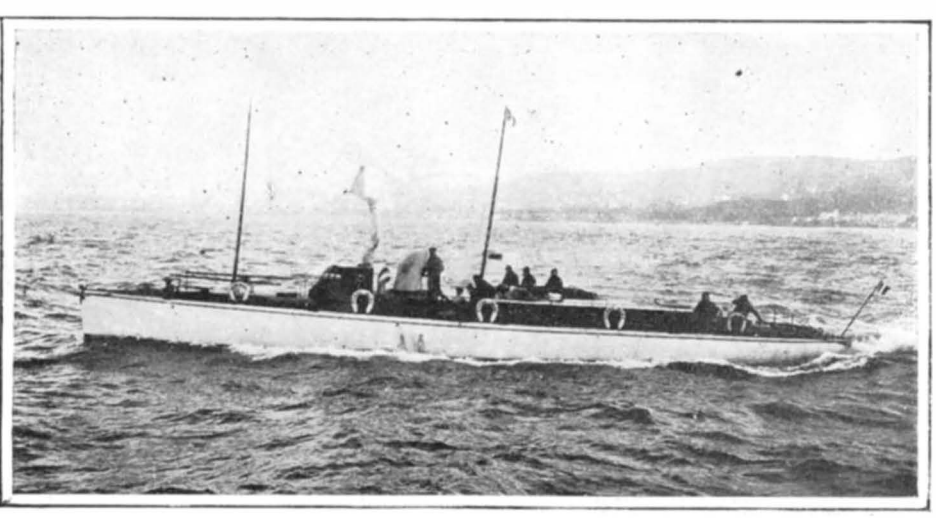

The 75-Foot, 200 H.-P. "Quand-Meme" of the Duc Decazes.

Although she did not make as fast time as the other boats in the first half of the race, the "Quand-Meme" proved to be the most seaworthy in the second half, as her crew stayed on her 36 hours, while the other boats were abandoned a whole day before.

THE PRINCIPAL COMPETITORS IN THE DISASTROUS ALGIERS-TOULON MOTOR-BOAT RACE.

"Fiat." Had it not been for the exceptionally heavy tempest, there is no doubt that they would have reached Toulon.

DO ANIMALS REASON?

BY NELSON R. BRIGGS.

There is much diversity of opinion on the question "Do animals reason?" even among scientists. But so long as scientists and doctors disagree, it is an open question as to how much more learned they are upon many subjects than the common, every-day man with equally as good reasoning powers, and neither with facts to prove his assertions other than reasoning powers.

I take great pleasure, however, in presenting to the readers of the SCIENTIFIC AMERICAN, that they may judge for themselves, an illustration to this article of a photograph of a cat opening a door, and thus gaining an entrance to the house. I took this photograph on March 17 last, about three P. M., after first watching the cat open the door two or three times, that I might the better judge of the best location for my camera, and, as I had no shutter to my lens, I was obliged to make the exposure by uncapping and capping the lens.

The photograph speaks for itself. The cat is of the yellow type, of good size, and belongs to Lanson Wiswall, a farmer living about three miles from Ballston Spa, N. Y. Mr. Wiswall says the cat was not taught to do this trick, if such it may be called; and how it came to understand or reason out that, even though the door was fastened with the old-fashioned thumb-latch, it could gain admittance to the house at will, by simply jumping up and grasping hold of the handle of the latch with one paw, and striking the thumb-piece with the other until the door swung open, is as much a mystery to him as it is to strangers who have witnessed the act.

Now, does this act not show reasoning powers on the part of the cat, when, finding that it could not push the door open with its nose or paw, it looks about and discovers that there is a latch, by climbing up to and striking which with its paw, it can open the door?

My experience and study of animals of the higher order of intelligence has induced me to maintain that most, if not all, animals do possess reasoning powers, and the above act simply adds to and strengthens my belief.

I am not disposed to agree with Mr. Burroughs, who says: "Such traits in animals are simply physical."

But there is, however, considerable philosophy in Mr. Deacon's statements. He says: "Whenever we find an animal able to learn by its own individual experience, we have the same right to predicate mind as existing in such an animal, that we have to predicate it as existing in any human being other than ourselves. Huxley observes that 'a race of dumb men deprived of all communication with those who could speak, would be little indeed removed from the beast.'"

Thus, it would appear that the mind of man in childhood, or in savagery, is not by any means so superior to that of the higher animals as is claimed by some. Such animals are speechless by reason of an anatomical accident, and not from an absence of ideas or ignorance of words.

AN UNUSUAL INCIDENT OF CABLE WORK.

BY MAJOR EDGAR RUSSELL.

The submarine cable between Valdez, on Prince William Sound, Alaska, and Sitka, Alaska, was suddenly interrupted on November 6, 1904. The cable had been laid about a month before by the cable ship "Burnside," operating under direction of officers of United States Signal Corps, and had been in perfect working order up to the time of its interruption. Tests from the Sitka office located the trouble about ten miles out from Sitka. The cable ship proceeded to Sitka to make repairs on January 24, 1905. While heaving in the cable toward the fault, the dynamometer began to show considerable strain. At first it was thought the cable was caught under a rock, and the ship was accordingly maneuvered to loosen it. Heaving in was slowly continued, when the carcass of a whale appeared, with a loop of the cable fastened around the lower jaw, as shown in the photograph. The loop was twisted, as well, thus securely holding the whale. The carcass was badly decayed, and the stench made the task of loosening the cable from the jaw most trying. During its struggles the huge animal had badly twisted and torn the cable in its vicinity, making several breaks in the conductor, thus interrupting communication. The steel armor wires, with the exception of three, were broken at the twist of the loop, and had the cable not possessed great tensile strength (20,000 pounds) it would undoubtedly have been broken. A splice was soon made, and communication between Valdez and Sitka restored.

One theory as to this peculiar accident is that the whale in feeding along the bottom was swimming

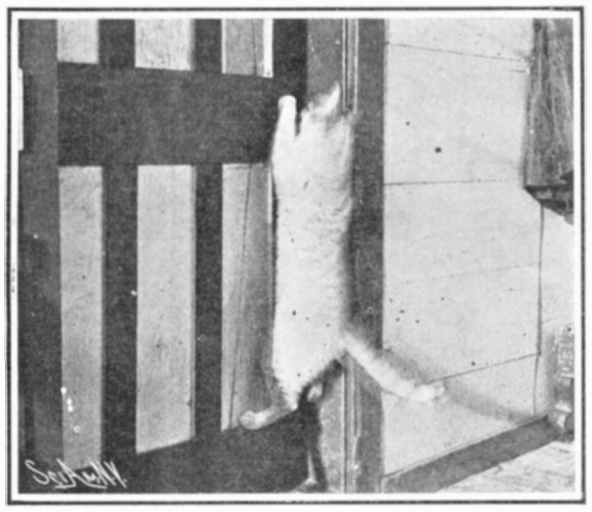

A CAT THAT HAS LEARNED HOW TO OPEN A DOOR.

slowly with jaws open. The cable being suspended on irregularites of the bottom, it came across the whale's open mouth, and the animal in its endeavor to disengage itself threw a loop in the cable. The whale was about fifty feet long. The depth at the place where it was found is sixty-five fathoms.

One other case of interruption of a cable by a whale is on record. This occurred in the Red Sea many years ago, and was caused by a loop of the cable being caught around the whale's tail. This, and interesting cases of interruption of cables by fishes, are described in SCIENTIFIC AMERICAN SUPPLEMENT, Nos. 46, 113, and 114.

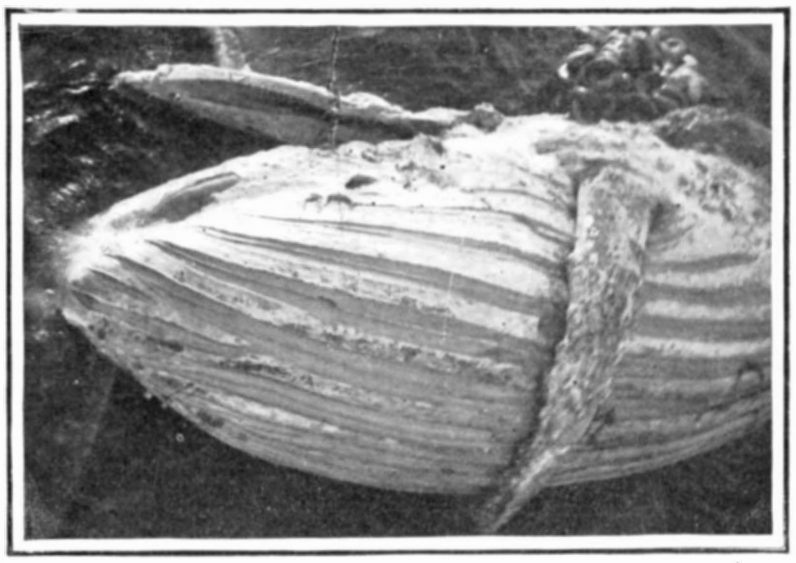

Whale Caught in Sitka-Valdez Submarine Cable.

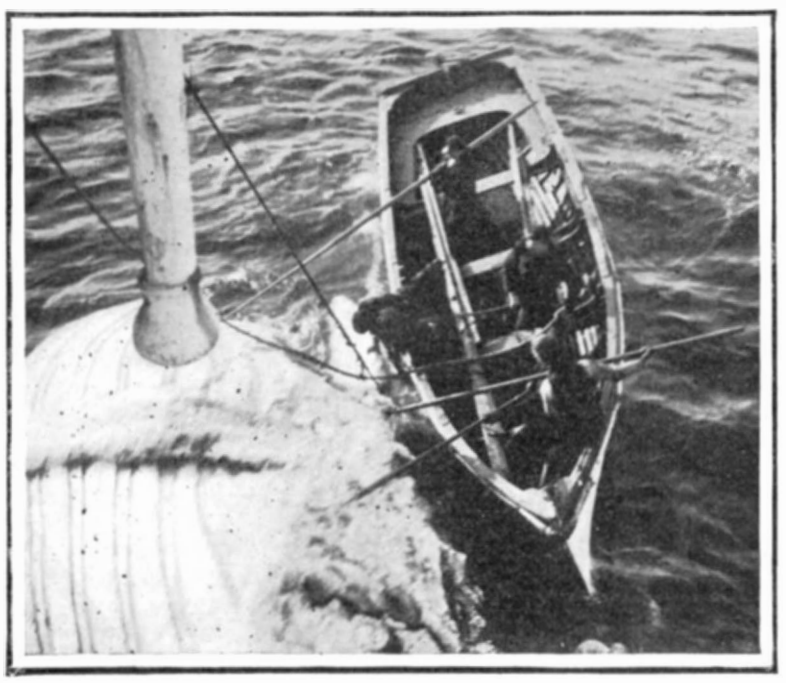

Untangling the Whale from the Cable.

AN UNUSUAL INCIDENT OF CABLE WORK.

The Misunderstood Inventor.

BY W. D. GRAVES.

By a very large class, one who attempts anything new, with a view to getting material returns therefor, is looked upon with good-natured contempt, on account of the large percentage of failures in that line; yet, in most born mechanics there is an ingrowing desire to create some new thing or process, or to improve some old one. If he fails, he is laughed at; if he succeeds, he is pronounced "lucky."

For a mechanic, however, there is little chance, other than this, for any very material advancement.

Invention is one of the very few fields in which one can give a man his money's worth and still make more than wages for himself; and, as in other fields, the only road to success is through repeated trials.

Worth is often difficult to ascertain, an unknown quantity, generally only to be judged by what one can get; but, whether it is known or not, there always is a *real* value; and, in buying and selling, one must buy for less or sell for more, or both, in order to make a profit above actual living wages for work done.

An inventor is, in a worldly sense, a creator, and may justly claim as recompense the value of his invention to others (though he rarely gets anything like that) without consideration of its cost to him; which cost is, by the way, generally much more than the average observer is likely to guess.

The cost of an invention consists not only of the actual time and money spent on that one device, but may justly include a portion of the expenditure on the many previous and unsuccessful ones, the bleaching bones of which ornament, or deface, the walls of the workshop of every inventor who has attained any measure of success.

A business man, conversing with the writer a few days since, commented on the remarkable sale of a recent invention, and observed that the inventor was probably making a fortune as the result of a happy thought. The writer happened to know that the inventor in question was not making any fortune, because he had not the business ability nor the capital necessary to make the device the success which it is, and that he sold his patent for a sum far under a fortune.

The writer well remembers, too, the Monday morning when he came to the shop with the "happy thought" shining through his countenance.

The invention, while a "happy thought" indeed, was not instantaneous, but was the outcome of many years of thought and practical work along those lines which lead to successful invention; and, after the thought came, there were many days of work, study, and experiment before the thing was in practicable form.

At the time of making this invention he was a man whose hair was well sprinkled with gray, a thorough mechanic in his line, and the owner of half a dozen patents on really practical devices, none of which had paid expenses.

Say who will, that he knows, yet no man knows or can do more than to guess whether an invention will or will not sell; and the inventor knows least of all, till he tries.

In reckoning the cost, then, is it not just to reckon those years of work and study which he devoted to unsalable inventions and which led up to the salable one?

Many writers of note, and of technical education, hold that, given the demand, a machine or mechanical device may be very readily worked out by fixed mechanical rules; and, while this is to a certain extent true, it is often the case that a man with the mechanical "knack" makes a short cut which leaves the calculator far behind, and the demand is often created by the device, or aroused to an extent which surprises the longest-headed prognosticators.

How often we see little things put on the market and sold in phenomenal quantities, for which we never dreamed of a demand till we saw them, but which we find absolutely essential to our comfort and wonder why we didn't think of them ourselves.

The sugar industry has made considerable progress in Japan of late. The extensive plantations of sugar cane in the island of Formosa are to be remarked in this connection and show the efforts which are being made toward home production. It is thus expected to diminish the imports from foreign countries. At present there are two large sugar refineries near Osaka and Tokio, which produced on an average 3,000 tons per month in 1903. The financial results are said to be very favorable, seeing that the cost of production is but $1 per picul (130 pounds). A third refinery is soon to be installed at Dairu in the island of Kyshu and it will suffice for the consumption in the south of Japan. The capital employed will be about $500,000. The works are favorably located near large coal mines.

Patent Department

TURRET COAL BIN FOR LOCOMOTIVE TENDERS.

A recent patent describes a new type of coal bin for locomotive tenders which offers the advantage of holding the coal always within easy reach of the cab, so that the necessity of dragging down the coal is avoided. The bin consists of a large drum provided with a central pivot pin which turns in a socket bearing in the floor of the tender. It is also supported by rollers traveling on tracks on the tender. The drum carries along its lower edge a peripheral rack which is connected by a train of gearing with a hand wheel. The latter may be operated to rotate the bin on its pivot to any desired position. The bin is divided by a central vertical partition into two compartments. Each compartment may be entered through double doors opening inwardly. These doors are cut away at the bottom, forming a triangular opening through which the coal may be shoveled out. A vertically swinging gate is provided for closing this opening when desired. When all the coal within easy reach of this opening has been shoveled out the doors of the bin may be opened to gain access to the rest of the coal. As soon as one compartment is emptied, the hand wheel is operated to turn the bin around until the other compartment is brought into convenient partition for shoveling out the coal. Our illustration shows the bin partly swung around. In the central position of the bin there are two doors which may be used in case of emergency. If, for example, an accident should occur which would prevent turning the bin, coal could be drawn from the filled compartment through one of these doors. The doors are arranged to open on opposite sides of the partition, so that no matter which compartment is filled it can be entered from the other compartment by one or the other of these doors. The inventor of this coal bin is Mr. C. C. Collette, 928 Florida Street, Springfield, Mo.

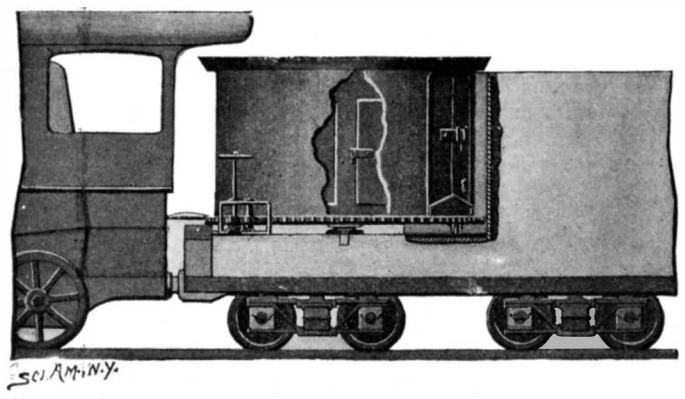

TURRET COAL BIN FOR LOCOMOTIVE TENDERS.

IMPROVED DUMPING CAR.

The accompanying engraving illustrates an improved dumping car invented by Mr. Herman Peiler, of Koloa, Kauai, Hawaii. Box 20. The car is so designed that it may be tilted to either side desired and at such an angle that the entire load will be dumped. As shown in the accompanying engraving the car comprises a bed mounted on wheels and a body portion resting on the bed. The side walls of the car body are hinged at their upper corners so that they can swing out to release the load when the car is dumped. Normally these sides are locked in closed position by means of hasps which engage eyes mounted on the main part of the car body. The arc-shaped pins which lock the hasps are attached to a rock shaft passing through the car body. The positions of the hasps on opposite sides of the car are such that when the shaft is rocked in one direction, one of the hasps will be unlocked, and when rocked in the other direction the other will be unlocked. Mounted on the bed under the ends of the car body, are rollers which, however, do not engage the body except when the latter is tilted. A pair of levers of special design are provided for tilting the car body, when the latter will roll sideways until arrested by pivot pins thereon engaging arms secured to the side sills of the car bed. Before tilting the car body the rock shaft should be operated to release the desired hasp so that the corresponding side wall will be free to swing out and permit dumping the load. After the load has been dumped the car body is attached with chains to the levers which are drawn back to return the parts to normal position. The car body is centered on the bed by means of socket pieces which slip over studs secured to the car bed, and in this position it is locked by pins which pass through the studs and into the body of the car.

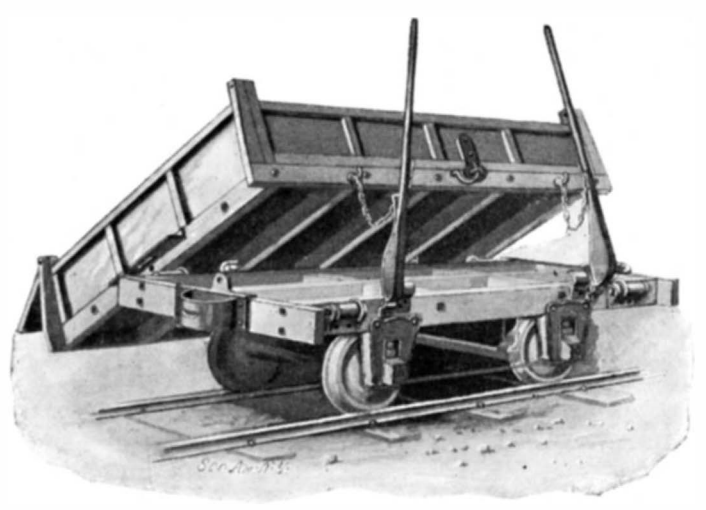

IMPROVED DUMPING CAR.

Brief Notes Concerning Patents.

A so-called "improvement" in devices for preventing collisions, accidents, etc., by railway trains has recently been invented. It consists essentially in a folding framework, known as a "lazy-tongs," the rear end of which is connected to a locomotive in such a manner that by operating a lever the framework may be folded or extended, so that the forward end will extend a considerable distance ahead of the train. Trucks support the framework at intervals, and are secured to the pivotal points of the levers making up the framework. The forward truck is provided with a buffer-bar, springs being interposed between this bar and the truck frame. An electrical alarm sounds within the engine when the bar comes in contact with any resisting body. The impossibility of this device performing the objects of its inventor would be apparent if one considers for a moment the force of impact due to the momentum of so large and swiftly-moving a body as a railway train. Even if the buffer device were sufficiently long and afforded resistance to any appreciable effect in reducing the speed of the train, the inertia of the joints could not be overcome with the needed rapidity for their response to the collision, and as a consequence, the wreck would be materially increased by the number of members in the "lazy-tongs."

An infringement suit has been brought against the management of the Louisiana Purchase Exposition, involving the invention of the identification card, which was made use of in the shape of passes to the late show. The patent covering the identification card was originally granted to B. L. Behrendt, of Chicago, Ill., and is now controlled by the Fraternal Identification Company of America.

A new type of berth, the object of which is to overcome seasickness, is in course of experiment upon two of the steamships plying between Dover and Calais. The berth is the device of a London dentist. The apparatus comprises a swinging cot suspended in a steel framework by four cords passing through electric brakes, which automatically maintain the bunk in a horizontal position, no matter how much the vessel may roll. The berth is fitted with a water mattress and an electric fan.

AN IMPROVED DITCHING MACHINE.

An economic and effective machine for making ditches for the purpose of under-draining land with tile, slate, etc., has been provided by the recent invention of Mr. Walter Umstead, of Jerseytown, Columbia County, Pa. The machine is arranged to be conveniently raised or lowered, so that the ditch may be carried to the desired depth by successive operations without undue strain on the team. The parts are so designed as to cut a straight, clean ditch, sweeping the dirt away from the edges. As shown in the accompanying engraving, the beam, *A*, is secured to the arched axle of the machine and carries the tongue at its forward end. This beam is made of channel iron, and at the rear end, between the side flanges, a pinion is mounted. The latter may be operated by a crank handle to raise or lower an inclined rack bar with which it is in engagement. The bar is held against the pinion by friction rollers mounted on a swinging yoke-piece, as illustrated. At its lower end the bar is hinged to a horizontal head bar, *F*, which carries a vertical standard against which the shank, *B*, of the plow is secured. Between the edge of this standard and the plow shank an L-shaped groove is formed into which a tongue on the clearing wing, *C*, is fitted. The wing thus has guided movement in a vertical direction. A coil spring, *D*, presses it down so as to hold it in engagement with the surface of the ground. The wing, *C*, is formed with a plate which curves over and in front of the plow shank so as to catch the soil that is turned up and guide it off to the side of the ditch. Directly in front of the plow are a pair of cutter plates, *E*, designed to cut the turf and any roots that may be encountered and to smooth off the sides of the ditch. It will be observed that the left-hand plate is considerably in advance of the other. In use the crank is turned to lower the plow and cutters to the required extent, while the clearing wing adjusts itself under pressure of the spring against the surface of the ground. It will be observed that the head bar, *F*, is connected by two links, *G*, to the beam, *A*, so that it will always lie horizontal no matter if swung up or down. The draft attachment is made close to the cutters, *E*, and the neck yoke is free to slide on the tongue so that it will adjust itself to different positions of the head bar. After the ditch has been cut the plow and cutters may be raised clear of the ground by operating the crank handle.

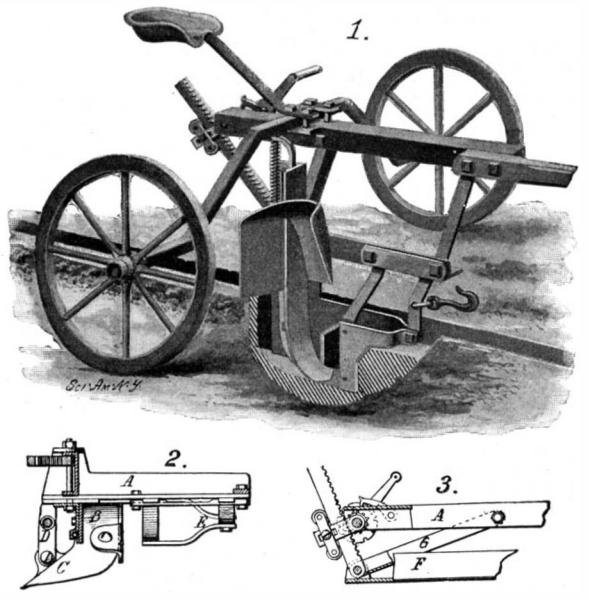

AN IMPROVED DITCHING MACHINE.

A PUNCTURE-PROOF TIRE.

A very interesting solution of the tire problem is offered by the recent invention of Mr. Thomas W. Ranson, Jr., of 135 North Perry Street, Cleveland, Ohio. In Mr. Ranson's vehicle wheel the tire is not placed on the outer periphery, but within a protecting rim of steel, so that the desired pneumatic cushion effect will be secured without exposing the rubber tube to the slightest danger of puncture, or to any great amount of wear. To furnish a certain degree of elasticity, and provide the requisite grip of the tire on the ground, a band of solid rubber is set into the steel rim. The steel rim is indicated at *A* in the engraving, and at *B* may be seen the solid rubber band. The rim, *A*, is attached to a steel ring, *C*, which is of inverted channel form, the side flanges projecting inward within a pair of face plates, *D*, bolted to the sides of the felly. Between these plates on the felly is a retaining ring of solid rubber, provided with a V-shaped outer periphery, in which the pneumatic tube is seated. The latter presses outward against the channel ring, *C*, but will give at the tread, permitting the ring, *C*, to slide within the plates, *D*, and producing the pneumatic cushion effect. The retainer and the tube are attached to the felly by means of a number of tire bolts. If, for any reason, the pneumatic tube should become deflated, the wheel could still be used by passing bolts through the holes in the channel ring just outside of the face plates, so that the ends of the bolts would rest on the edges of the face plates and hold the steel rim, *A*, concentric with the rest of the wheel. This, of course, sacrifices the elasticity of the tire to a large extent, but is of little consequence in cases of emergency. The construction of the tire is also advantageous for another reason, namely, that in guiding the vehicle around sharp corners, there is no probability of the tire being thrown off, as happens with many constructions now in use.

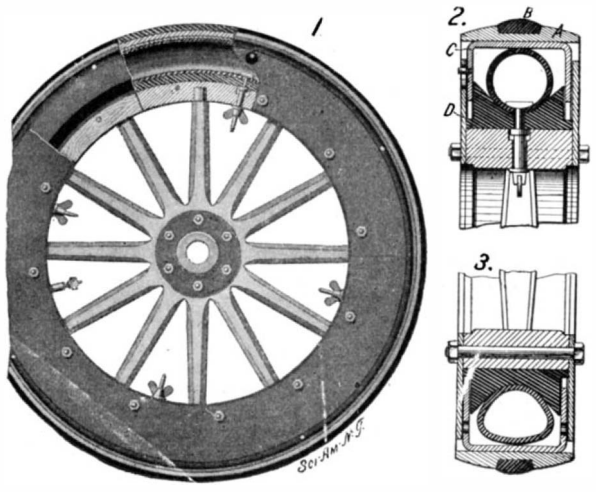

A PUNCTURE-PROOF TIRE.



"Star" Foot and Power Screw Cutting Automatic Cross Feed Lathes

FOR FINE, ACCURATE WORK

Send for Catalogue B.

SENECA FALLS MFG. CO.
695 Water Street,
Seneca Falls, N.Y., U. S. A.

ENGINE & FOOT LATHES. MACHINE SHOP OUTFITS. TOOLS AND SUPPLIES. CATALOGUE FREE. SEBASTIAN LATHE CO. 120 CULVERT ST. CINCINNATI O.

Foot and Power and Turret Lathes, Planers, Shapers, and Drill Presses.
SHEPARD LATHE CO., 133 W. 2d St. Cincinnati, O.

GIANT STEAM SHOVELS



Toledo 125 Ohio, U.S.A. Vulcan Place

The Vulcan Iron Works Co.

THE CLIPPER CLIP

Its triangular shape prevents entangling and gives three times the capacity of any other Clip for attaching papers together.
Best & Cheapest. All Stationers.

CLIPPER MFG. CO.,
401 West 124th St., New York, U.S.A.

BRASS OR STEEL

For free samples and information write to us.

HOW TO MAKE AN ELECTRICAL Furnace for Amateur's Use.—The utilization of 110 volt electric circuits for small furnace work. By N. Monroe Hopkins. This valuable article is accompanied by detailed working drawings on a large scale, and the furnace can be made by any amateur who is versed in the use of tools. This article is contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **1182.** Price 10 cents. For sale by MUNN & Co., 361 Broadway, New York City, or by any bookseller or newsdealer.



Every Gas Engine User should learn about the **Apple Automatic Sparker.** Easily attached. No more belt, battery or commutator troubles. Increases power and speeds For any kind of ignition apparatus write
The Dayton Electrical Mfg. Co.
98 Beaver Bldg. Dayton, Ohio.

Protection at Minimum Cost

The **"Alligator" Check Protector and Envelope Opener** is the most useful of all articles for Office or Home use. Made of spring steel, nickel-plated and highly polished. Sample by mail **50 cents.** Trade and advertisers supplied.
S. I. ATWATER, 369 Broadway, New York, U.S.A.



FOR GUNSMITHS, TOOL MAKERS, EXPERIMENTAL & REPAIR WORK, ETC.
From 9-in. to 13-in. swing. Arranged for Steam or Foot Power, Velocipede or Stand-up Treadle.
Send for Lathe Catalog.
W. F. & JNO. BARNES CO.
Established 1872.
1999 Ruby St., ROCKFORD, ILL.

PERFECT - PUMP - POWER.



is attained only in the TABER ROTARY PUMPS
They are mechanical, simple and durable. Will pump hot or cold fluid, thin or thick. Requires no skilled mechanic. Most power at least cost. All parts interchangeable. Made of iron, steel or bronze. Can be driven by belt, motor or engine attachment. *Large Illustrated Catalogue free.*
TABER PUMP CO., 32 Wells St., Buffalo, N.Y., U. S. A.

If you want the best CHUCKS, buy Westcott's



Little Giant Double Grip Drill Chucks, Little Giant Drill Chucks Improved, Oneida Drill Chucks, Cutting-off Chucks, Scroll Combination Lathe Chucks, Geared Combination Lathe Chucks, Plain Universal Lathe Chucks, Independent Lathe Chucks. Made by

Westcott Chuck Co., Oneida, N. Y., U. S. A.
Ask for catalogue in English, French, Spanish or German.
FIRST PRIZE AT COLUMBIAN EXPOSITION, 1893.

ROTARY PUMPS AND ENGINES. Their Origin and Development.—An important series of papers giving a historical resume of the rotary pump and engine from 1588 and illustrated with clear drawings showing the construction of various forms of pumps and engines. 38 illustrations. Contained in SUPPLEMENTS **1109, 1110, 1111.** Price 10 cents each. For sale by Munn & Co. and all newsdealers.

Induction Coils



for X-Ray Apparatus and Wireless Telegraphy. **Special Jump Spark Coil** for Automobiles and Gas Engines.

E. S. RITCHIE & SONS, Brookline, Mass.

THE EJECTOR MUFFLER



The Greatest Advance in the Gasoline Age
For particulars, write to
The Motor and Manuf'g Works Co., Ithaca, N.Y.

WE ARE SELLING

Battery Fan Motors, $1.25 to	$10 50
Battery Table Lamps, $3.00 to	10.00
Telephones Complete, $2.50 to	11.25
Electric Door Bells, 75c., $1.00, $1.25,	1.50
Carriage and Bicycle Lights, $2.00 to	5.00
Lanterns and Pocket Flash Lights, 75c. to	3.00
$8.00 Medical Batteries,	3.95
Telegraph Outfits, $1.75 to	2.50
Battery Motors, 75c. to	12.00
Necktie and Cap Lights, 75c. to	5.00
Dynamos and Motors, $900 to	1.00

Catalog free, free, free. Fortune for agents
Ohio Electric Works, Cleveland, O.

RECENTLY PATENTED INVENTIONS.

Electrical Devices.

TROLLEY.—J. H. CLARK, Urichsville, Ohio. The object of this invention, which relates to improvements in trolleys for electric-railway systems, is to provide a harp and combined oil and bearing boxes for the trolley-spindle so constructed that the boxes can be readily reversed from one harp member to the other to compensate for wear, and when the bearings in the boxes are worn out new ones may be placed in the harp.

Of Interest to Farmers.

HEEL-SLIDE FOR PLOWS. — E. M. TOUTCHTONE, Valdosta, Ga. It is sought by this invention to provide a novel form of heel which can be readily applied to any of the ordinary forms of plows, now commonly used —such, for instance, as the "Avery," the "Georgia ratchet," and any other form of plow-stock that works without a heel. The construction is simple, and in operation on the roughest land will hold the plow steady and the work easier for both plowman and horse.

Of General Interest.

SAW GAGE AND JOINTER.—T. OLSEN, Manistee, Mich. The object of the inventor is to provide a device readily adjustable and easily handled. In operating upon the cleaner teeth the face plate is placed against the saw and the flanges engage on the top of the teeth, with the cleaner-tooth extended through a receiving slot. After filing one cleaner-tooth the device may be readily removed to the next. In top-jointing, flanges are placed against the blade of the saw and the file passed over tops of the teeth.

MEANS FOR ATTACHING BOILER-TUBES TO THE TUBE-SHEETS.—H. L. MCCULLOUGH, Cropsey, Ill. In this patent the invention pertains to steam-boilers; and the purpose is to provide a new and improved means for attaching the boiler-tubes to the heads of the tube-sheets and arranged to prevent leakage due to unequal contraction and expansion of the tubes and the tube-sheets.

T-BOLT.—G. R. LANG, Cincinnati, Ohio. It is customary to clamp work upon planers, boring-mills, and other machine-tools by means of bolts having heads passing into T-slots in the surface of the bed. When different size or class of work is substituted for one previously used, these bolts have to be changed, and hunting new ones consumes time and is a great waste. Also when bolts of proper length are not on hand new ones are forged and threads turned upon them to receive the nut to be used. By means of a removable head for the bolt, which can be used with any length of bolt and not to be renewed, the inventor does away with above delays and forging.

FILTER.—T. LINKE, New York, N. Y. The intention in this case is to provide a filtering-faucet of simple construction so arranged that either filtered or unfiltered water may be discharged from it, that may be conveniently manipulated by a handle at the top, that may be readily dismembered for repairing without discharging water, and which has a novel arrangement of stone-cleaners.

PERMUTATION LOCKING DEVICE FOR LOCKETS.—O. KATZENBERGER, San Antonio, Texas. This improvement refers to locking devices for lockets such as are usually worn suspended from the neck of a person, and more particularly to such as are adapted to contain a miniature likeness or other valued souvenir, and its object is to provide a permutation device having a hinged lid, which will be adapted to secure the lid closed until the correct combination is attained by proper manipulation of working parts of the device.

METAL JOINTING.—M. H. BIGSBY, Monmouth, Ill. The invention refers to improvement in means for jointing or securing two metallic members, the object being to provide a simple means for connecting two metal numbers together while in a cold condition, the invention being particularly adapted to cold-rolled steel or finished metal designed to be plated or polished.

Heating and Lighting.

MANTLE FOR GAS-BURNERS.—A. H. SASSMAN, New York, N. Y. A mantle is provided by this invention especially adapted for use in connection with gas-burners used for heating purposes. The mantle so surrounds the burner as to direct the heat from the burner in concentrated form in an upward direction and at the same time is so far removed from the burner that the flame from the burner will create a suction, drawing up air between the mantle and burner, which is heated and conducted upward with the actual heat from the flame of the burner.

Machines and Mechanical Devices.

ELEVATOR.—A. KARRER, St. Joseph, Mo. The invention has reference to an elevator in which the car is moved by means of screws or worms climbing on corresponding racks, by which arrangement it is practically impossible for the car to drop through the shaft upon the breakage of some part of the machinery. Electric current is taken to the elevator mechanism by a trolley, and let out therefrom through another and its arm or pole.

FEEDING MECHANISM FOR SEWING-

Try Squares

CONCAVE Case Hardened Stock. Blades hardened to Spring Temper and graduated to 32d and 64ths, 2 to 12 ins. long.
Write to-day for Catalogue No. 17 B.
THE L. S. STARRETT CO., Athol, Mass.

LUFKIN
TAPES AND RULES
ARE THE BEST.
For sale everywhere. Send for Catalog No. 16.
LUFKIN RULE CO.
Saginaw, Mich., U. S. A.
New York and London.

THE EUREKA CLIP



The most useful article ever invented for the purpose. Indispensable to Lawyers, Editors, Students, Bankers, Insurance Companies and business men generally. Book marker and paper clip. Does not mutilate the paper. Can be used repeatedly. In boxes of 100 for 25c. To be had of all booksellers, stationers and notion dealers, or by mail on receipt of price. Sample card, by mail, free. Manufactured by **Consolidated Safety Pin Co.,** Box 121, **Bloomfield, N. J.**

Size No. 2.

PATENTS

Our Hand Book on Patents, Trade-Marks, etc., sent free. Patents procured through Munn & Co. receive free notice in the
SCIENTIFIC AMERICAN
MUNN & CO., 361 Broadway, N. Y.
BRANCH OFFICE: 625 F St., Washington, D.C.

DO YOU USE GRINDSTONES?
If so we can supply you. All sizes **mounted** and **unmounted,** always kept in stock. Remember, we make a specialty of selecting stones for all special purposes. *Send for catalogue "I"*
The CLEVELAND STONE CO.
2d Floor, Wilshire, Cleveland, O.

STA-RITE
Ignition Plugs stay right the longest. 26 sizes. Porcelain, $1.50, Mica, $1.75, postpaid, with handy wrench, motor accessories.
THE E. E. HARDY CO.
225 Broadway, New York



WELL DRILLING Machines
Over 70 sizes and styles, for drilling either deep or shallow wells in any kind of soil or rock. Mounted on wheels or on sills. With engines or horse powers. Strong, simple and durable. Any mechanic can operate them easily. Send for catalog.
WILLIAMS BROS., Ithaca, N. Y.

1/3 the cost

For Coal (even less in many cases) is the claim made for the Peck-Williamson UNDERFEED Furnace.

This claim is made by—
Well known people—
Living in the coldest sections—
After the severest tests.

A recent correspondent, referring to our UNDERFEED, stated:
"I have used it for the past two winters, heating ten rooms and an upper hall at a cost of $35 per annum."

Hundreds of such letters come to us.

In the Peck-Williamson UNDERFEED Furnace a ton of cheapest grade of coal is made to produce as much heat as a ton of the most costly grade; the coal is fed from below and the fire is on top—the rational way; the gases and smoke do not escape up the chimney as they do in ordinary furnaces, but are consumed as they pass up through the fire; immunity from gas, smoke and dirt; less ashes and no clinkers; simple and strong in construction, easy to operate.

Let us send you FREE our UNDERFEED Book and fac-simile voluntary letters proving every claim we make.

The Peck-Williamson Co., 351 W. 5th St., Cincinnati, O.

Dealers are invited to write for our very attractive proposition.

The Vice-President of the United States

Charles W. Fairbanks, wrote us:—"I find The New International Encyclopædia most valuable and prepared with great care. It is a pleasure to commend such a work."

THE CATHOLIC WORLD—"The New International has not followed the traditional statements of worn-out books of reference, but has gone to original sources; and as a consequence, presents not garbled and inaccurate statements, but the truth. We marvel at the extent of this monumental work."

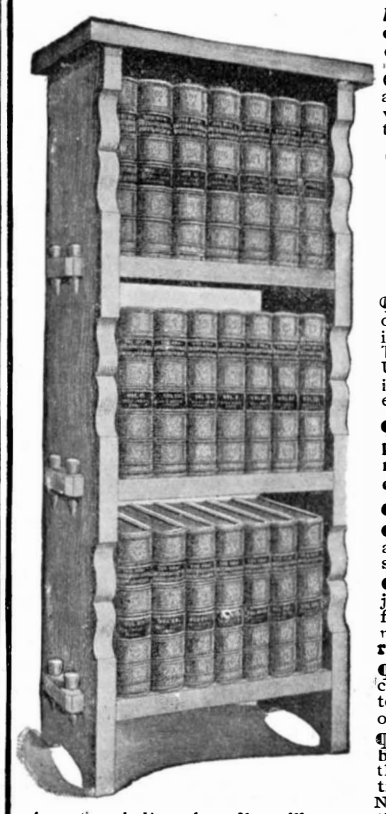

REV. CHARLES H. FOWLER, D.D., LL.D., Bishop M. E. Church, Buffalo—"I am pleased to be the owner of the New International Encyclopædia. It is the library of libraries."

¶ Here are three opinions, representative of the people and of widely different religious creeds, which speak volumes for the scope of usefulness and accuracy of this, the greatest literary work of recent years.

The New International Encyclopædia

¶ Editors-in-Chief: **Daniel Coit Gilman,** LL.D., President of Johns Hopkins University (1876-1901), afterwards President of the Carnegie Institution of Washington; **Harry Thurston Peck,** Ph.D., L.H.D., Professor in Columbia University, and **Frank Moore Colby,** M.A., late Professor in New York University, assisted by over three hundred eminent scholars as assistants.

¶ The publishers are one of the oldest and best known publishing houses in the United States. These are the men who offer you the newest, the most accurate and complete encyclopædia in English.

¶ Nothing has been omitted, nothing doubtful included.

¶ It is just as useful and comprehensive to the plain people as to the scientist and investigator. It never fails to show superiority in any fair test with any other work of its kind.

¶ 16,329 pages, 67,097 separate articles on over 100 000 subjects. You can go to The New International with confidence that you will find what you wish to know. The matter is not ten or twenty years old, but brought right down into the year 1904.

¶ We have also a companion volume containing courses for study and reading in The New International which greatly increase the value of the encyclopædia to you.

¶ We will send **a handsome 80-page book free** which tells many interesting things, with maps, full-page illustrations, and sample pages from The New International. The New International Encyclopædia **will prove** the best bargain of your life, and the price is **within your reach**; the payments so easy that any one can meet them.

Dodd, Mead & Company
PUBLISHERS
372 Fifth Avenue, New York

FILL IN NAME AND ADDRESS AND SEND THIS COUPON.

DODD, MEAD & COMPANY, PUBLISHERS, 372 Fifth Ave., New York:
Gentlemen:—Please send, without cost to me, your handsome 80-page book describing THE NEW INTERNATIONAL ENCYCLOPÆDIA, containing specimen pages, colored illustrations, maps and information regarding price and easy payment plan.

Name.....
Occupation.....
Street.....
Post Office.....
State.....
Scient. Amer. 58

A 1000 years of mistakes and then the

NATURO

the closet with a slant, the only sort of construction that is healthy, clean, comfortable. The NATURO is the only improvement made in Water Closets since the style YOU know was conceived. Aren't you interested in knowing "Why?" Write for book L. It tells in detail, with illustrations. **THE NATURO CO., Salem, N.J.**

Convert Your Bicycle Into a Motorcycle

at a moderate cost by attaching the **Mesco 1¾ h.p. Motor Outfit** which includes all accessories to make a complete machine without alteration. Choice of three transmissions. **Complete Motorcycles and Marine Motors.** Parts sold separately. Write for catalogue. Agents wanted.
Motor Bicycle Equipment & Supply Co., Buffalo, N.Y.

STEAM TURBINES.—THEIR CONSTRUCTION, Operation and Commercial Application. SCIENTIFIC AMERICAN SUPPLEMENTS **1306, 1307, 1308, 1422, 1400, 1447, 1370, 1372.** The articles have all been prepared by experts in steam engineering. Price 10 cents each, by mail. Munn & Co., 361 Broadway, New York City, and all newsdealers.

Volt Ammeters

Pocket size, but large enough for accuracy and practical use. Various ranges for testing batteries electric light, telephone and other circuits, etc. Also, Voltmeters and Ammeters for general measurements.
Send for Circular.
L. M. PIGNOLET,
80 Cortlandt St., New York, N.Y.



ARTESIAN

Wells, Oil and Gas Wells drilled by contract to any depth from 50 to 3000 feet. We also manufacture and furnish everything required to drill and complete same. Portable Horse Power and Mounted Steam Drilling Machines for 100 to 1200 feet. Write us stating exactly what is required and send for illustrated catalogue. Address
PIERCE WELL ENGINEERING AND SUPPLY CO.
136 LIBERTY STREET, NEW YORK, U. S. A.

Valuable Scientific Papers
ON TIMELY TOPICS
Price 10 cents each, by mail

ELECTRONS AND THE ELECTRONIC THEORY are discussed by SIR OLIVER LODGE in SCIENTIFIC AMERICAN SUPPLEMENTS **1428, 1429, 1430, 1431, 1432, 1433, 1434.**

THE PANAMA CANAL is described from the engineering standpoint in SCIENTIFIC AMERICAN SUPPLEMENT **1359.**

WIRELESS TELEGRAPHY. Its Progress and Present Condition are well discussed in SCIENTIFIC AMERICAN SUPPLEMENTS **1425, 1426, 1427, 1386, 1388, 1389, 1383, 1381, 1327, 1328, 1329, 1431.**

HOW TO CONSTRUCT AN EFFICIENT WIRELESS TELEGRAPH APPARATUS AT SMALL COST is told in SCIENTIFIC AMERICAN SUPPLEMENT **1363.**

SUBMARINE NAVIGATION. An exhaustive review of the subject is published in SCIENTIFIC AMERICAN SUPPLEMENTS **1414, 1415, 1222, 1223.**

SELENIUM AND ITS REMARKABLE PROPERTIES are fully described in SCIENTIFIC AMERICAN SUPPLEMENT **1430.** The paper is illustrated by numerous engravings.

THE INTERNAL WORK OF THE WIND. By S. P. LANGLEY. A painstaking discussion by the leading authority on Aerodynamics, of a subject of value to all interested in airships, SCIENTIFIC AMERICAN SUPPLEMENTS **946** and **947.**

LANGLEY'S AERODROME. Fully described and illustrated in SCIENTIFIC AMERICAN SUPPLEMENTS **1404** and **1405.**

STEAM TURBINES. Their Construction, Operation and Commercial Application. SCIENTIFIC AMERICAN SUPPLEMENTS **1306, 1307, 1308, 1422, 1400, 1447, 1370, 1372, 1521.** The articles have all been prepared by experts in steam engineering.

PORTLAND CEMENT MAKING is described in excellent articles contained in SCIENTIFIC AMERICAN SUPPLEMENTS **1433, 1465, 1466, 1510, 1511.**

AERIAL NAVIGATION. Theoretical and Practical Discussions. Pictures and Descriptions of actually-built dirigible balloons and aeroplanes will be found in SCIENTIFIC AMERICAN SUPPLEMENTS **1161, 1149, 1150, 1151, 1404, 1405, 1413, 1455.**

THE TANTALUM LAMP. A full illustrated description of a lamp having a metallic filament and burning at once without preliminary heating appears in SCIENTIFIC AMERICAN SUPPLEMENT **1523.**

THE WATERPROOFING OF FABRICS is thoroughly discussed in SCIENTIFIC AMERICAN SUPPLEMENT **1522** by an expert.

THE SPARK COIL, ITS CONSTRUCTION AND MAINTENANCE, is the subject of a painstaking article in SCIENTIFIC AMERICAN SUPPLEMENT **1522.**

ELECTRIC IGNITERS FOR GAS ENGINES are discussed in SCIENTIFIC AMERICAN SUPPLEMENT **1514.**

CARBURETERS, a subject of immense importance to automobilists and the users of oil engines, is well treated in SCIENTIFIC AMERICAN SUPPLEMENT **1508.**

EPICYCLIC TRAINS, which play an important part in toothed gearing, are ably described in SCIENTIFIC AMERICAN SUPPLEMENT **1524.**

Price 10 cents each, by mail

MUNN & COMPANY
361 Broadway New York

MACHINES.—H. MANNING, 46 Grays Inn road, London, England. The mechanism is for lock-stitch sewing machines; and comprises a presser-foot for feeding, a lever comprising an open frame with cam-surfaces and at its upper end an arm carrying the foot, a shaft extending through the opening in the lever and carrying a cam-stud adapted to carry the lever's cam-surfaces a part of the shaft's revolution to move the lever in one direction to feed work, a spring secured at one end to the machine-frame and bearing at its other end on said lever to move it in the opposite direction when the stud is out of operative engagement with the lever. An adjustable stop consisting of a set-screw screwing through a lug on the machine frame is provided with a lock-nut, said lever having a padded projection for engaging the stop-screw.

CENTRIFUGAL APPARATUS FOR ELECTROLYTIC PURPOSES.—R. V. HEUSER, Erie, Pa. This apparatus is partly electrolytic and partly centrifugal, with the following advantages: Comparatively great output per unit of weight of apparatus employed and large percentage of product as compared with quantity of brine employed; greater current density at the cathode; use of mercury not required; process continuous and capable of carrying out without stopping apparatus from running; considerable labor saved; apparatus given comparatively large proportions and yet be under complete control of operator; anodes possess great durability; no colloidal member nor diaphragm is required.

LEMON-SQUEEZER.—P. MCGRATH, Hibbing, Minn. This lemon-squeezer is of that type in which a plunger is forced into a cup to press the lemon. The invention provides various improvements intended to facilitate the adjustment of the parts, and insure the efficiency of the squeezer. A prominent feature consisting of a plunger is so mounted as to permit of being rotated when the lemon has been squeezed, whereby to more effectively press the juice and pulp from the fruit.

Prime Movers and Their Accessories.

TURBINE.—L. E. TRUESDEL, Kershaw, S. C. The underlying objects of the present improvement are to more effectively distribute the pressure of the steam or other elastic fluid around the periphery of the rotor of the turbine and also to improve the devices for governing the turbine action. The invention relates particularly to an improvement in radial-flow turbines, and it is of the same general class as that forming the subject of a prior patent granted to Mr. Truesdel.

Railways and Their Accessories.

LUBRICATING-BEARING FOR AXLE-JOURNALS.—T. V. MONROE and M. HALLINAN, Clinton, Iowa. The invention relates to an improvement in bearings for locomotive axle-journals, and has for its object the provision of a simple, cheap, and efficient device of the character mentioned and one which can be readily applied to the journal-boxes now in use. Oil and waste are placed within the upper cellar, and the waste projects through the open center of the bearing-plate against the axle journal. Waste is held in place and prevented from rolling by inturned flanges.

RAILROAD-SWITCH.—W. H. SAMMONS, North Bend, Ore. The object of this invention is to provide a three-way switch and means to be carried by a locomotive or street car for operating the switch therefrom. In order that the switch may be operated at will by an engineer or motorman, Mr. Sammons provides the front part of the locomotive or car in advance of its forward wheels with a rotatable shaft carrying switch-operating shoes. When necessary to operate the switches by hand switch-blocks are connected to a switch-stand by operating-rods.

Pertaining to Recreation.

CUE-TRIMMER.—A. B. LOW, Denver, Col. This invention refers to improvements in devices for removing old glue from and trimming or leveling the ends of billiard or like cues preparatory to placing tips thereon, an object being to provide a trimmer of simple construction that will readily adjust itself to cues of varying sizes.

BASE-BALL-GAME APPARATUS.—J. E. DAUER, Summerville, S. C. In the present patent the invention relates to a base-ball-game apparatus having a multiple dial, read in connection with certain instructions, usually printed upon a slip. The game can be played by eighteen persons, representing two full sides, or it can be played by one person, using the men and operating them according to instructions on the slip.

STARTING-GATE.—J. M. FLYNN, New York, N. Y. This gate or barrier is particularly adapted for starting horses on a race-track, an object being to provide a gate so constructed that before rising for the start it will have a movement for a desirable distance lengthwise of the track, whereby the field of horses may be caused to walk to an alinement at the starting-point, thus preventing long and tedious delays incident to starting.

NOTE.—Copies of any of these patents will be furnished by Munn & Co. for ten cents each. Please state the name of the patentee, title of the invention, and date of this paper.



Carriage Motors
For Bicycle, Contact or Jump Spark
One Piece Casting. Light Weight. Large Bearing Surfaces. Write us to-day
GRANT-FERRIS CO.
Troy, N. Y.

***The* Cushman Motor**
never disappoints. The least weight for the power developed makes it the BEST BOAT and AUTO MOTOR on the market. **The New 1905 Model** is better than ever. The engine proper is valveless. The cylinder, water jacket and head are cast in one piece. It is the **simplest** as well as the **most efficient.** Holds many speed records. Made in Single and Double Cylinder patterns. Prices make it economical. Cut shows 2 h. p. marine, weight 75 lbs. We make Auto Motors and Stationary Engines. Catalog free
Agents Wanted. **CUSHMAN MOTOR CO.**
2026 N Street, Lincoln, Neb., U. S. A.



BARKER MOTORS
Have more good points, fewer parts and require less attention in operation than any other.
Launches, Valves, Specialties.
C. L. Barker, Norwalk, Ct.

USE THE MICHIGAN
Famous two and three-blade Solid and Reversible Propeller Wheels, supplied to over one hundred engine builders. They have no equal for speed and strength. They are in use in every resort and on all fast racers. **Independent Reversible Clutches,** Can be readily attached to any motor, has absolute control over boat at full speed ahead, idle or reverse. Have four different sizes, suitable for motors from 1 to 80 H.P.



Michigan Motor Co.
Grand Rapids, Mich., U.S.A.

SENSITIVE LABORATORY BALANCE. By N. Monroe Hopkins. This "built-up" laboratory balance will weigh up to one pound and will turn with a quarter of a postage stamp. The balance can be made by any amateur skilled in the use of tools, and it will work as well as a $125 balance. The article is accompanied by detailed working drawings showing various stages of the work. This article is contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **1184.** Price 10 cents. For sale by MUNN & CO., 361 Broadway, New York City, or any bookseller or newsdealer.

8 LIGHT DYNAMO $26.50
Other sizes 3 to 300 Lamps,
MOTORS
from 1-16 to 20 H. P.
Write for Bulletin
ROTH BROS. & CO.
27 S. Clinton St., Chicago



PALMER
MARINE and STATIONARY
MOTORS
2 and 4 CYCLE
are no experiment, as they are in successful operation in all parts of the world.
Launches in stock.
Send for Catalogue.
PALMER BROS.,
Cos Cob, Conn.
New York Office, 34 W. 26th St.



Men Turn as by a Common Impulse
To Safety from Disease Germs.
The Buffalo Sanitary Sterilizer sterilizes Towel, Razors, Cup, etc., in less than one minute. This machine will do the work of a Barber Shop up to 10 chairs. The only Sterilizer with separate chambers. Each doing its own work. Hot Water and Towels with no trouble nor expense. The water is always pure and can be used for lather or any other purpose. Implements always in antiseptic condition. Agents wanted.



KINGORY MANUFACTURING CO.
1443-1459 Niagara St., Buffalo, N.Y.

Have You a Boiler Plant of Two or More Boilers?
If you have, our pamphlet, "Boiler Room Economy" will prove of interest to you. It tells all about boiler scale—what causes it and how it's best removed. **The**

Dean Boiler Tube Cleaner is the device which thoroughly removes all scale. Write to-day and let us send you this pamphlet "Boiler Room Economy."
THE WM. B. PIERCE CO.
319 Washington Street, Buffalo, N. Y.

How To Increase Your Business

READ carefully, every week, the **Business and Personal Wants** column in the
Scientific American
This week it will be found on page 450.
Some week you will be likely to find an inquiry for something that you manufacture or deal in. A prompt reply may bring an order.
Watch it Carefully

Business and Personal Wants.

READ THIS COLUMN CAREFULLY.—You will find inquiries for certain classes of articles numbered in consecutive order. If you manufacture these goods write us at once and we will send you the name and address of the party desiring the information. **In every case it is necessary to give the number of the inquiry.**
MUNN & CO.

Marine Iron Works. Chicago. Catalogue free.

Inquiry No. 6885.—For firms in United States manufacturing apparatus for the dry distillation of wood, for producing alcohol, charcoal and other products.

WANTED.—A substance with the following qualities, for which I will pay for the formulæ or information. It must be as hard as a lead pencil rubber when at 100 degrees F. and soft enough to mold at 150 degrees F. Insoluble in water, but which will expand very slowly in the presence of water. Light color is preferred.
Weston A. Price, D.D.S.,
2228 Euclid Ave., Cleveland, Ohio.

Inquiry No. 6886.—For manufacturers of fire clay articles.

"U. S." Metal Polish. Indianapolis. Samples free.

Inquiry No. 6887.—Wanted, address of F. Keil & Son, manufacturers of cabinet hardware.

Perforated Metals, Harrington & King Perforating Co., Chicago.

Inquiry No. 6888.—For manufacturers of diamond doublets.

Handle & Spoke Mchy. Ober Mfg. Co., 10 Bell St., Chagrin Falls, O.

Inquiry No. 6889.—Wanted, a second-hand automatic turning lathe, suitable for turning table legs.

Adding, multiplying and dividing machine, all in one. Felt & Tarrant Mfg. Co., Chicago.

Inquiry No. 6890.—For manufacturers of an article called "helps to hear" or ear drums.

Commercially pure nickel tube, manufactured by The Standard Welding Co., Cleveland, O.

Inquiry No. 6891.—For manufacturers of novelties.

Sawmill machinery and outfits manufactured by the Lane Mfg. Co., Box 13, Montpelier, Vt.

Inquiry No. 6892.—For manufacturers of fiber extracting machines.

I sell patents. To buy them on anything, or having one to sell, write Chas. A. Scott, 719 Mutual Life Building, Buffalo, N. Y.

Inquiry No. 6893.—For manufacturers of aluminium nails or pins.

The celebrated "Hornsby-Akroyd" Patent Safety Oil Engine is built by the De La Vergne Machine Company, Foot of East 138th Street, New York.

Inquiry No. 6894.—For manufacturers of mills to pulverize tin scraps and tangled wire, No. 16 and smaller.

Gut strings for Lawn Tennis, Musical Instruments, and other purposes made by P. F. Turner, 46th Street and Packers Avenue, Chicago, Ill.

Inquiry No. 6895.—For manufacturers of apparatus for making extractions by means of a volatile solvent and recovery of same.

We manufacture iron and steel forgings, from twenty pounds to twenty-five tons. Crank shafts of all varieties. Erie Forge Company, Erie, Pa.

Inquiry No. 6896.—For manufacturers of crude oil burners for placing under boilers and in furnaces.

You can rent a well equipped private laboratory by day, week or month from Electrical Testing Laboratories. 548 East 80th Street, New York. Absolute privacy. Ask for terms and facilities.

Inquiry No. 6897.—For manufacturers of seamless bags, No. 3 and No. 5, such as used for sugar and salt.

Manufacturers of patent articles, dies, metal stamping, screw machine work, hardware specialties, wood fiber machinery and tools. Quadriga Manufacturing Company, 18 South Canal Street, Chicago.

Inquiry No. 6898.—For manufacturers who make small malleable castings from people's patterns.

Space with power, heat, light and machinery, if desired, in a large New England manufacturing concern, having more room than is necessary for their business. Address Box No. 407, Providence, R. I.

Inquiry No. 6899.—For manufacturers of chemical fire extinguishers called "The Underwriters."

Manufacturers of all kinds sheet metal goods. Vending, gum and chocolate, matches, cigars and cigarettes, amusement machines, made of pressed steel. Send samples. N. Y. Die and Model Works, 508 Pearl St., N. Y.

Inquiry No. 6900.—For manufacturers of soda water bottles, of 8 oz. capacity.

WANTED.—The patents or sole agency for Britain and France, of new machines and articles used in the Brewing and Allied Trades. Highest references given and required. State best terms with full particulars to "Wideawake," care of Streets Agency, 30 Cornhill, London, England.

Inquiry No. 6901.—For manufacturers of a moderate priced instrument used in lining up and leveling shafting.

WANTED.—A first-class Machine Shop Foreman; a man who is capable of producing work at the lowest possible cost. Must be a man of ideas and capable of hiring and handling men. Reliability first consideration. Steady position with opportunity to advance. Factory at Waterloo, Iowa. Address Manufacturer, Box 773, New York.

Inquiry No. 6902.—For manufacturers of tin foil for covering jelly tumblers.

Splendid opening for a high-grade mechanical engineer, who has had a broad experience in managing machine shops, the manufacture of machinery, engines and metal specialties. Applicants must be in prime of life and now employed. Preference will be given to applicants who have had modern scientific training in mechanical schools of high standing. Unqualified references will be exacted. All communications received will be regarded as strictly confidential. Address
Mechanical Engineer, Box 773, New York.

Inquiry No. 6903.—For parties who make and install "Geyser" fountains.

Small Machine Shop and Brass Foundry located in Central New York are desirous of manufacturing some mechanical article or appliance. Have a thoroughly equipped plant, plenty of ground, reliable water power, railroad facilities. Can turn out mostly anything at a low figure. Experienced mechanics in charge. Presently making gasoline engines and accessories.
Address Model Plant, Box 773, N. Y.

Inquiry No. 6904.—For manufacturers of wood skewers.

Fans WATER Motors



Our **"Little Wonder"** water motor and outfit, including emery wheel, two buffing and polishing wheels, pulley wheel, and sticks of silver and steel polishing compositions, is the only satisfactory outfit on the market to-day, for sharpening edged tools, grinding and polishing metals and silverware, running light machinery, etc. Attaches directly to any water faucet. About ⅛ H. P. according to pressure. **Price, complete, $4.00.**

Our **"Hydrogiant"** directly attaches to any water faucet. It is a small handsome water motor, **ball-bearing throughout,** very speedy and serviceable at low water pressure. Equipped for any attachment. Especially useful to Dentists, Jewelers and Doctors. **Price, with pulley wheel, $5.00.**



Our **"Polar" bracket water fan** is a handsome 6 bladed polished brass fan with 7-inch enameled water motor, polished brass ball and socket joint, and brass guard. Elegant and efficient in every detail. Over 1,600 revolutions at 45 pounds water pressure. **Price of motor with fan and guard, complete, $18.00.** Our **"Arctic" 7-inch stand water motor** with 1½ or 3 inch brass pulley will run any kind of light machinery or apparatus requiring not more than ¼ horse-power. **Price, with pulley, $8.50.**

Larger water motors and fans of all sizes quoted upon request. Write us, for we have just what you want. Our goods are reasonable and absolutely satisfactory.

WARNER MOTOR COMPANY, Dept. 15, Flat Iron Bldg., NEW YORK CITY



WE GUARANTEE

OUR OUTFITS TO HANDLE MORE AIR FOR THE POWER CONSUMED THAN ANY OTHER SET OF THE SAME SIZE. TO BUY THEM IS GOOD **ECONOMY.** GENERATORS, VARIABLE & CONSTANT SPEED MOTORS

Rochester Electric Motor Co., 10-12 Frank Street, ROCHESTER, N. Y.

Surveying and Drawing Instruments

DRAWING AND ARTISTS' MATERIALS AND SUPPLIES

We are the largest house in the world. Try us on BLUE PRINT PAPER, TRACING CLOTH, DRAWING INKS, or SURVEYING and ENGINEERING INSTRUMENTS

A. S. ALOE CO, 515 Olive Street, - - - St. Louis, Mo.

Write for Catalog. "Sent Free." Correspondence Solicited.



"STANDARD"

Two-Speed Automatic Coaster Brake Hub

Makes wheeling a delight, eliminates the drudgery. Do not waste money on experiments when you can buy a perfect attachment *all in* one hub. Our little booklet tells all about it and is mailed free. Write to-day.

STANDARD SPOKE AND NIPPLE CO. - Torrington, Conn.

KLIP-KLIP

BEST EVER MADE

A perfect manicure Quick, easy, simple and strong.

Makes the nails beautiful round & smooth

The Original, made in German silver, **25c.**

Klip-Klip Jr., nickeled, **15c.** At dealers or mailed. Accept no substitute.

As heretofore, made only by

KLIP-KLIP COMPANY,

Send 4c. in stamps for book, "How to Care for the Hands." 556 Clinton Ave. S., Rochester, N. Y.

MILLS FOR ALL MATERIALS.



OUR BUSINESS IS TO MAKE MACHINERY FOR GRINDING GRAIN, CRUSHING ROCKS AND PULVERIZING ALL HARD SUBSTANCES. WE HANDLE ALL KINDS OF MATERIALS FROM COTTON-SEED TO ROOTS AND HERBS, BY AN UNEXCELLED PROCESS. IF YOU WANT ANY KIND OF A MILL OR GRINDING MACHINE, COME TO US AND YOU WILL GET THE BEST AND STILL SAVE MONEY.

DEAL WITH US ONCE AND YOU WONT CHANGE.

ESTIMATES FREELY FURNISHED.

SPROUT, WALDRON & CO.

SEND FOR CATALOG NO 41 MUNCY, PA.

Just Published

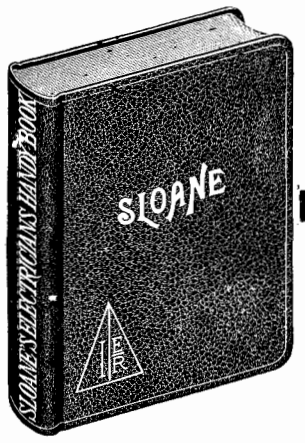

768 Pages
556 Illustrations

Price $3.50
Postpaid

Electricians' Handy Book

A MODERN WORK OF REFERENCE

A COMPENDIUM OF USEFUL DATA, COVERING THE FIELD OF ELECTRICAL ENGINEERING

Including The Theory of the Electric Current and Circuit, Electro-Chemistry, Primary Batteries, Storage Batteries, Generation and Utilization of Electric Power, Alternating Current, Armature Winding, Dynamos and Motors, Motor Generators, Operation of the Central Station, Switchboards, Safety Appliances, Distribution of Electric Light and Power, Street Mains, Transformers, Arc and Incandescent Lighting, Electric Measurements, Photometry, Electric Railways, Telephony, Bell-Wiring, Electro-Plating, Electric Heating, Wireless Telegraphy, Etc., Etc., Etc.

Containing 556 Illustrations and Diagrams

By T. O'CONOR SLOANE, A.M., E.M., Ph.D.

Handsomely Bound in Red Leather, with Titles and Edges in Gold, Pocket Book Style . . .

☞ *Special circular of contents free.*

MUNN & COMPANY, Publishers
361 Broadway, New York City

Notes and Queries.

HINTS TO CORRESPONDENTS.

Names and Address must accompany all letters or no attention will be paid thereto. This is for our information and not for publication.

References to former articles or answers should give date of paper and page or number of question.

Inquiries not answered in reasonable time should be repeated; correspondents will bear in mind that some answers require not a little research, and, though we endeavor to reply to all either by letter or in this department, each must take his turn.

Buyers wishing to purchase any article not advertised in our columns will be furnished with addresses of houses manufacturing or carrying the same.

Special Written Information on matters of personal rather than general interest cannot be expected without remuneration.

Scientific American Supplements referred to may be had at the office. Price 10 cents each.

Books referred to promptly supplied on receipt of price.

Minerals sent for examination should be distinctly marked or labeled.

(9644) M. G. A. asks: Please answer the following questions, and settle a dispute between parties of the physics class of high school of this city. Let a ray of light passing through a highly refractive body, from a point within approach the surface, making the angle of incidence greater than the critical angle. Does not one part of a wave front, emerging from the surface before the other part, pass into the air, and traveling at an increased velocity, swing around and enter the body again, the lower extremity meanwhile remaining below the surface? Can the ray properly be said to be reflected as if the surface were a perfect mirror, or to be reflected at all? Is not the left extremity of a wave front in the incident ray, the right extremity in the reflected ray, when the ray is reflected by a mirror? Is this so in the case of the so-called total internal reflection? If the answer to the first question is not in the affirmative, please give the reason why part of every wave front does not emerge from the said surface. If the first part of the third question is answered in the negative, please explain what actually does occur. A. If any portion of a wave front of light can pass from one medium into another, the whole of that wave front can pass, and refraction will result. Total reflection takes place when the angle of refraction becomes as great as 90 deg. Then no portion of the wave can pass into the rarer medium. All is turned back into the denser medium, as may be seen by the use of a right-angled prism, receiving the light perpendicularly upon one of its equal faces. The surface at which the total reflection takes place is a perfect mirror. No mirror can reflect more light. This can be seen in a glass of water, by holding it above the eye and looking up into the water obliquely from below. The upper surface shines as bright as silver perfectly polished. The sides of a wave system are reversed after total reflection as they are after any other reflection.

(9645) C. K. B. asks: What is the cause, or where do the prevailing westerly winds of the northern hemisphere originate? How does the rotation of the earth cause the deflection of the trade and anti-trade winds of the northern hemisphere? A. The general systems of the winds are due to the greater heat of the torrid zone. This produces the inflow of air from the cooler regions on either side of the hot region. The heated and lighter air is forced up by the flowing of the colder air under it, and it flows away to the north and south in the upper layers of the air. After this air is cooled it descends, and flows along toward the poles, only to return and again take part in the general circulation of the winds. The rotation of the earth on its axis causes great changes in direction of these currents, and we have northeast and southwest winds as more or less permanent winds in different parts of the northern hemisphere. This is but a rough and general statement of the winds, but may serve as a basis for fuller reading on the subject in the physical geographies. As the current of cooler air flows along over the smooth surface of the ocean in the torrid zone north of the equator, it is passing from a region where the velocity of rotation of the earth is less to a place where it is greater. This causes the wind to lag with reference to the earth under it, and to appear to come from a point farther to the east than it has really come. It thus becomes a northeast wind, and is the northeast trades. For a similar reason the returning currents of air over the ocean become southwest winds, or the anti-trade winds.

(9646) A. W. asks: 1. In calculating horse-power of an engine, has weight of piston any bearing on amount of horse-power? Why not? A. The weight of the piston of an engine has no influence on the horse-power excepting in so far as it affects the friction of an engine. This latter is very small. 2. Could a water motor on 10 pounds pressure maintain compressed air in cylinder at 25 pounds pressure, i.e., can water motor 10 pounds water pressure compress air to give 25 pounds pressure? A water motor acting on a pressure of 10 pounds per square inch could maintain compressed air in a cylinder at 25 pounds pressure per square inch, provided the area of the piston in the water cylinder were more than two and one-half times as great as the area of the piston in the air cylinder.

DIAMONDS ON CREDIT

THE fair sex have an eager appreciation of Diamonds. Diamonds not only make women beautiful and successful in society but in the hour of need are a savings bank. All women know that they can get instant cash for their Diamonds—at any moment—anywhere. The earnest desire of woman is for Diamonds. Every woman loves a Diamond. Nothing pleases her so much as to be presented with a Diamond. Save a Diamond—Win a Heart. Write for a copy of our interesting Catalog, 1000 illustrations of Diamonds, Watches and Jewelry.

The Loftis Catalog is Free Write to-day for a copy of this beautiful and sumptuous Catalog. You will be interested in looking through its marvelous pages containing 1000 illustrations of Diamonds, Watches and Jewelry. There are sixty-six pages of unique information especially valuable to the Diamond buyer. The popular **Loftis System** of Diamonds on Credit is explained in every detail, the quotations being the lowest. All applicants also receive from us our Souvenir Diamond Booklet. Don't delay. Write at once. We will mail you both Catalog and Booklet free. Write to-day.

The Loftis System of Diamonds on Credit is famous. It won the Gold Medal at the St. Louis Exposition. By this system, which is both easy and confidential, distant buyers are enabled to select at leisure the very finest Diamonds and highest grade Watches and Jewelry, securing them at the lowest prices. The article is sent on approval to your home, place of business or express office as desired. You can examine it. You are free to buy or not, as you please. We deliver our goods anywhere in the United States. We pay all charges. We take all risks. We ask no security—we create no publicity—we make no inquiries from employers. All transactions absolutely private and confidential. Your account will be welcomed. Write for Catalog.

Our Credit Offer We trust all honest people. We trust employer and employee. We trust you. We will open a confidential account with you. One-fifth the price you pay on delivery—you retain the article and then send the balance direct to us in eight equal monthly installments. These small monthly payments you will never miss from your income. Remember, that a Diamond is better than a savings bank. Diamonds are predicted to increase 20 per cent during the present year.

Our Cash Terms You select your Diamond from our Catalog. You pay us cash for it We give you a written guarantee that you can return the Diamond any time within one year and we will pay you all you paid for it less ten per cent. By this arrangement you are able to wear a $50 Diamond Ring or Stud for one year. You can then return it to us—we will return you $45—which is less than ten cents per week for one year. Every Diamond we sell may be exchanged at full price for a larger stone.

Guarantee We give a written guarantee of quality and value with each Diamond we sell. This guarantee is signed by a member of our firm. We refer you to your local bank. They will refer to their commercial agency records, and tell you that our responsibility, promptness and reliability are unquestioned in the business world. We are the largest retailers of Diamonds, High Grade Watches and Jewelry in America. Finest goods—lowest prices—easiest terms. Every sale is a matter of confidence and personal honor between our customers and ourselves.

Write To-day to us for our Catalog and Souvenir Diamond Booklet and you will obtain every advantage. Write to-day.

LOFTIS BROS & CO. DIAMOND CUTTERS Watchmakers, Jewelers Dept. F 180 ESTD 1858 92 to 98 State Street CHICAGO, ILLINOIS

Everything for the Automobile



Yankee Ampere Meter

Gives accurate reading 0 to 30 amperes

PRICE $3.50

"Dead-beat" indicator comes to full stop at the correct reading

E. J. WILLIS COMPANY
8 Park Place, New York

Instructive Scientific Papers

ON TIMELY TOPICS

Price 10 Cents each by mail

ARTIFICIAL STONE. By L. P. Ford. A paper of immense practical value to the architect and builder. SCIENTIFIC AMERICAN SUPPLEMENT **1500.**

THE SHRINKAGE AND WARPING OF TIMBER. By Harold Busbridge. An excellent presentation of modern views; fully illustrated. SCIENTIFIC AMERICAN SUPPLEMENT **1500.**

CONSTRUCTION OF AN INDICATING OR RECORDING TIN PLATE ANEROID BAROMETER. By N. Monroe Hopkins. Fully illustrated. SCIENTIFIC AMERICAN SUPPLEMENT **1500.**

DIRECT-VISION SPECTROSCOPES. By T. H. Blakesley, M.A. An admirably written, instructive and copiously illustrated article. SCIENTIFIC AMERICAN SUPPLEMENT No. **1493.**

HOME MADE DYNAMOS. SCIENTIFIC AMERICAN SUPPLEMENTS **161** and **600** contain excellent articles with full drawings.

PLATING DYNAMOS. SCIENTIFIC AMERICAN SUPPLEMENTS **720** and **793** describe their construction so clearly that any amateur can make them.

DYNAMO AND MOTOR COMBINED. Fully described and illustrated in SCIENTIFIC AMERICAN SUPPLEMENTS **844** and **865.** The machines can be run either as dynamos or motors.

ELECTRICAL MOTORS. Their Construction at Home. SCIENTIFIC AMERICAN SUPPLEMENTS **759, 761, 767, 641.**

Price 10 Cents each, by mail

Order through your newsdealer or from

MUNN & COMPANY
361 Broadway New York

Williams' Shaving Stick

signifies—Perfection.

Williams' Shaving Sticks, Shaving Tablets, Toilet Waters, Talcum Powder, Jersey Cream Toilet Soap, etc., sold everywhere

Write for booklet "How to Shave"

THE J. B. WILLIAMS CO.
GLASTONBURY, CONN.

ELECTRICAL APPARATUS REPRESENTED by Conventional Diagrams in Drawings.—Fifty diagrams showing the usual method of illustrating electrical apparatus in drawings. A labor saving paper. Contained in SUPPLEMENT **1106**. Price 10 cents. For sale by Munn & Co. and all newsdealers.

The Bank That Pays 4 Per Cent.

Start a savings account for the baby. It will grow as fast as he, and may, perhaps, be the means of his education or his start in business. It is no trouble to open an account with this strong bank. Deposits accepted in any amount from $1.00 up.

Four Per Cent. Compound Interest Paid on Savings

Illustrated booklet and story of the Origin of Banking by Mail sent free to readers of this magazine

Capital $1,000,000 Surplus $1,000,000

PEOPLES SAVINGS BANK
PITTSBURG, PA.

The Best Fire Insurance

is to build fireproof buildings. Besides you **save** money and **make** money by doing so. Whether your building is a three thousand or a three hundred thousand dollar structure you ought to read

FIREPROOF MAGAZINE

Sample Copy Free. Write for it

FIREPROOF MAGAZINE
1310 Great Northern Bldg., Chicago

(9647) O. S. asks: I have seen two different methods for reading, by attached vernier, 1-500 part of 1 inch, as follows: 1. To divide on the scale 1 inch in 20 1-20, and on the vernier 25 parts, which 25 parts equal on the scale 24½. 2. To divide on the scale 1 inch in 20 1-20, and on the vernier 25 parts, which 25 parts equal on the scale 19 1-20. I am a scientific instrument maker, and I have very much to do with verniers for reading 1-500 parts of 1 inch, so I ask you kindly to tell me which of these two methods is correct. A. If you wish a vernier reading to 1-500 of one inch, you should first divide each inch on your scale into 20 equal parts, and then, by means of the vernier, be able to divide each part into 25ths. There are two ways of doing this, either one of which is absolutely accurate. First. Make your vernier 24-20 of an inch long, and divide it into 25 equal parts. Each part will then equal 24-500 inch. Each main division of the scale itself equals 25-500. The difference one division on the scale and one division on the vernier, therefore, equals 1-500 of an inch, as required. Second. Make the vernier 26-20 of an inch long, and divide it into 25 equal parts. One division on the vernier then equals 26-500 inch, while one division on the scale equals 25-500. The difference between the two, therefore, is 1-500 of an inch, as before. These are the only current methods of making the vernier, provided each inch on the scale is divided into 20 equal parts. You can readily determine which of these two types of vernier will suit your purpose in any given case.

INDEX OF INVENTIONS

For which Letters Patent of the United States were Issued for the Week Ending May 23, 1905

AND EACH BEARING THAT DATE

[See note at end of list about copies of these patents.]

Advertising device, J. Ovary	790,522
Advertising door closer, L. J. Long	790,696
Advertising writing table, W. H. Reiff	790,804
Air brake system, J. E. Shaw	790,808
Amalgamating plate plater and amalgamating plate cleaning compound, O. W. Zane	790,415
Amalgamator, T. J. A. Macdonald	790,445, 790,446
Amusement device, J. C. Boyle	790,613
Annunciator, G. F. Atwood	790,548
Atomizer, W. Sams	790,318
Automobile, M. J. Davin	790,724
Awning winding box, J. Rickert	790,459
Azimuth instrument, B. H. Camden	790,674
Ball joint, J. D. Walsh	790,767
Balls, constructing golf, F. H. Richards	790,398
Bandage roller, E. F. Frost	790,427
Barrel, metal, H. Wehrhahn	790,861
Battery, W. C. Banks	790,866
Battery solution, F. M. Holmes	790,502
Bearing, roller, R. F. Bower	790,712
Bed, Burdette & Malone	790,720
Bed bottom, spring, S. I. Bridgewater	790,614
Bed, invalid, W. McLennan	790,588
Bed, swinging or folding, J. C. Bahr	790,474
Bevel and square, J. Graff	790,496
Binder, loose leaf, G. McBride	790,382
Binder, loose leaf, C. H. Brown	790,779
Bird cage, A. B. Hendryx	790,570
Biscuit cutter, M. Savidge	790,806
Bit, M. E. Zeller	790,774
Block. See Building block.	
Boilers, hot water purifier for, G. Y. Bonus	790,816
Bolt and nut cutter, W. B. Carolus	790,617
Bolt blank heating apparatus, R. R. Jones, et al	790,302
Book cover, check, D. A. Templeton	790,762
Boot or shoe, composite, G. F. Butterfield	790,558
Boring machine, multiple bit, J. M. Garfield	790,823
Bottle, non-refillable, J. E. Moseman	790,700
Bottle, non-refillable, F. A. Heath	790,836
Bottle washing apparatus, D. Boyle	790,817
Bottles, means for guarding against the reuse of, W. B. Bostwick	790,281
Bottling machine, R. Pfaff	790,455
Braiding machine carrier, J. & G. F. McCahey	790,649
Brake beam fulcrum, adjustable, J. A. Matthews	790,736
Brake shoe, L. E. Robinson	790,754
Brick handling truck, J. J. Gledhill	790,495
Broom moistening and sprinkling attachment, J. P. Taylor	790,761
Brush handle, shaving, J. L. Erskine	790,622
Brush holder, A. A. Low	790,582
Buckle, L. Cabalka	790,673
Buckles, device for detachably securing bands to, Mitchell & Beach	790,585
Building block, O. D. Inman	790,436
Building block, C. W. & R. Meara	790,514
Building blocks, machine for manufacturing, E. H. Reed	790,661
Burglar alarm, J. E. Liess	790,303
Burial casket, C. E. Myers	790,648
Button drilling machine, S. A. Brandon	790,554
Calculating apparatus, E. Hayem	790,431
Calipers, micrometer, F. Spalding	790,665
Camera, photographic, E. L. Hall	790,497
Cameras, half-tone screen holder for photographic, J. S. Ditty	790,290
Camphor, making, Stephan & Hunsalz	790,601
Candle receiving rack, S. H. Leavenworth	790,845
Cane loading apparatus, V. Goetz, Jr.	790,826
Cannon, blank cartridge, M. J. Shimer	790,598
Car, convertible, Robinson & Witte	790,592
Car coupling, C. W. Rowell	790,593
Car dump, automatic revolving, A. Moore	790,586
Car folding guard, street, H. F. Vogel	790,766
Car, fruit, produce, and refrigerator, E. M. Phillips	790,851
Car grain door, railway, K. Osel	790,521
Car, railway, H. J. Bayard	790,420
Car replacing frog, C. L. Sullivan	790,327
Car, tank, C. L. Rogers, reissue	12,348
Car, tank, W. F. Kiesel, Jr.	790,690
Car window sash balance, K. Schliepmann	790,321
Carbureter for hydrocarbon engines, C. P. Mingst	790,379
Cash registers, automatic spool carrying drawer for, Frydmane & Chambon	790,627
Caster, Linn & Geib	790,733
Casting apparatus, W. S. Weston	790,544, 790,545
Casting machine, D. Baker	790,270
Cellulose, triacetyl, Eichengrun & Becker	790,565
Cement block mold, O. S. Lamberson	790,507
Chair, bed, couch, or the like for use in surgical operations or examinations, P. A. Gayon	790,726
Channel bars, etc., straightening mechanism for, C. S. Simmers	790,706

THE "BEST" LIGHT



Spectacles and Eyeglasses

are a superfluity where our lamps are used.

Portable, 100-candle power and produces a safe, white, powerful, steady light with

No odor, dirt, grease or smoke.

Every lamp warranted. Costs 2c per week.

AGENTS WANTED EVERYWHERE.

The BEST LIGHT CO.
Owners of Original Patents.
87 E. 5th St., Canton, O.

WARREN'S
NATURAL ASPHALT SAND SURFACED
ROOFING

Apply it yourself. Makes a finished gravel roof. Comes ready to lay in rolls of 108 square feet. Write for sample, circular and prices. Warren Chemical and Mfg. Co., 18 Battery Pl., New York

Write for 32-page catalog, FREE.

To Gas Engine Operators
Dynamo Ignition.
Motsinger Auto-Sparker

No battery to start or run. The original speed-controlled friction-drive Dynamo. Driven parallel with engine shaft. No belts. No beveled pulley or beveled fly wheel necessary. For make and break and jump-spark system. Water and dust proof. FULLY GUARANTEED.

MOTSINGER DEVICE MFG. CO.,
14 Main Street, Pendleton, Ind., U.S.A.

Power Wire Rope

SAINT LOUIS — GRAND PRIZE WIRE ROPE — WORLD'S FAIR

MOST POWERFUL WIRE ROPE MADE

BRODERICK & BASCOM ROPE CO
ST. LOUIS, MO

Cheap Power from Kerosene

SAFE, SIMPLE, VALVELESS AND RELIABLE

Universal Kerosene Engine.



Automatic in operation, easily started, and runs steadily and at a comparatively high rate of speed at a cost of less than one pint of kerosene oil per actual horse power hour. Praised wherever used. Highest efficiency at lowest cost. For prices and terms address

UNIVERSAL KEROSENE ENGINE CO.
6, 8 and 10 First St., New York City

SPECIAL ANNOUNCEMENT

To be published on July 1, 1905: A NEW PUBLICATION entitled

American Homes and Gardens

Successor to SCIENTIFIC AMERICAN BUILDING MONTHLY

THIS new monthly magazine will be much broader in scope than its predecessor. It will have the word "HOME" for its keynote. The man to whom this word has no meaning will have no interest in this new publication. It is the intention of the Editor to take the reader with him to various parts of the country, and show him how the better class of people live, whether the house may have cost $3,000 or $300,000. Good taste is, perhaps, more necessary in the building and furnishing of a house of small cost than in a mansion of importance.

The Editor will not leave you on the outer doorstep, however, but will take you within, where you may see how the house is furnished and decorated, and how the owners live. Then you may have a walk through the garden, and then to the summer house, where, perhaps, the plan of the formal garden culminates.

There will be published articles on room decoration and furnishing, showing how the furniture may be arranged to produce the best effects, what pictures may be hung, and what bric-à-brac, inherited from some former mansion, may with advantage be discarded.

Each issue will contain an article on some important mansion, showing, if possible, various views of the exterior, the interior, and the garden. Plans are published with most of the residences shown.

The new publication will be issued monthly, and will be somewhat smaller in page size than the "Building Monthly," viz.: 10½ x14. It will have a handsome colored cover. It will have about 50 pages each issue. Price, 25 cents each issue; $3.00 a year.

SPECIAL OFFER TO READERS OF THE "SCIENTIFIC AMERICAN"

To any one subscribing before June 1, 1905, the subscription price will be $2.50 for "American Homes and Gardens" for one year from July 1, 1905, to July 1, 1906, and the subscriber will receive free of charge the "Scientific American Building Monthly" for May and June.

To any one subscribing after June 1, 1905, the subscription price, without exception, will be $3.00 a year.

Subscribe at once and obtain the most favorable terms.

MUNN & COMPANY, Publishers, 361 Broadway, NEW YORK

One-third of a Century

Standard of the World

A delicious beautifier, preserver and cleanser of the teeth; makes the breath sweet and the gums less tender. The Metal Box is a handy package for the toilet table and traveling; no powder to litter; no liquid to spill or stain.

25 Cents, at all Druggists.

C. H. Strong & Co., Props., Chicago, U. S. A.

Touch a lever and instantly write another color

for emphasis
for display
or any other reason, *on the*

SmithPremier

Typewriter with Bi-Chrome Ribbon

Ribbons inked for copying and record are used largely by Banks, Insurance Companies, etc

ELECTRIC SEWING MACHINE MOTOR.—The instructions and numerous illustrations of details contained in this article will enable any mechanic of average ability to build an efficient motor that will operate a sewing machine. The cost of materials for this machine should not exceed five dollars. See SCIENTIFIC AMERICAN SUPPLEMENT, No. **1210.** Price 10 cents by mail, from this office and from all newsdealers.

J. Eckhardt's Double Grater

Patented Nov. 10, 1903, No. 743,472

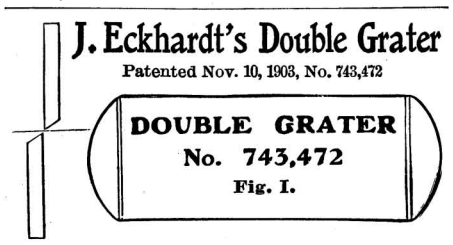

The above illustrated double Grater is superior to any Grater of the old style, as it works on a different principle, as can be seen in Fig. 1. It works faster, does not scratch the fingers, and never gets dull; has one side for fine and one side for coarse grating. Can be manufactured very cheap.

Patent Rights and Shop Rights can be obtained from the Patentee,

J. ECKHARDT,

1415 Salisbury Street, St. Louis, Mo.

Species and Varieties

Their Origin by Mutation

By HUGO deVRIES

Professor of Botany in the University of Amsterdam

Edited by Daniel Trembly MacDougal, Assistant Director of the New York Botanical Garden

865 pages. *Circular, sample copies of Magazine and catalogue free on request.*

The Open Court Publishing Co.
1322 Wabash Ave., Chicago

American Jump Spark Ignition Apparatus

UPON IT DEPENDS THE SUCCESS OF YOUR ENGINE

We manufacture the famous Am. Indestructible Spark Plug, with double insulated mica core. It lasts indefinitely. Our Coils are the recognized standard of the world. Write for catalog.

American Coil Co., P. O. Box 89, **W. Somerville, Mass.**
N. Y. Representatives, Auto Supply Co., 1662 Broadway, N. Y. City.

KENT POCKET METERS

ACCURACY
Volt-Ammeters, O-5 V. O-20 A.
Price $6.00.

GUARANTEED
Volt meters O-5 V. $5.00.
Ampere meters, O-20 A. $5.00.
Discount to trade.

ATWATER KENT MFG. WORKS
110 North Sixth Street, Philadelphia, Pa.

Chart, tailor's, J. R. Van Dame	790,333
Check or ticket, sectional, P. J. Menahan	790,515
Cheese cutter, F. P. Dunn	790,564
Chest handle, J. D. Judkins	790,689
Chopper. See Cotton chopper.	
Christmas tree candle holder, H. Buhring	790,556
Chuck, automatic, J. Pearson	790,656
Chute delivery controlling device, J. Piza	790,852
Clamp feeding device, J. J. Foss	790,494
Clasp, G. H. Taylor	790,329
Clock, cash register time, F. C. Osborn	790,654
Clock system, electric, Roberts & Robinson	790,753
Clothes line reel, Connell & Nay	790,818
Coal screen, J. Hickman	790,572
Coffin, hermetically sealed, C. H. Hiser	790,729
Coin controlled apparatus, I. Kitsee	790,641
Coin controlled apparatus, fraud preventing device for, F. P. Cox	790,347
Coining or other press, O. Smith	790,462
Coke quenching apparatus, F. R. Still	790,326
Collar fastening device, R. Mount	790,380
Collar, horse, F. A. Klappauf, et al	790,579
Comb, Taaffe & Winters	790,857
Combing machinery, S. Shackleton	790,757
Compass deviation corrector, B. H. Camden	790,871
Concentrator, H. H. Campbell	790,342
Concrete block mold, F. & C. Eckhard	790,291
Condenser, R. D. Tomlinson, reissue	12,349
Contactor support and casing, W. O. Mundy	790,381
Controlling mechanism, G. E. Turner	790,765
Conveyer, B. H. Alvey	790,776, 790,811
Core drill, C. A. Terry	790,330
Core drill apparatus, C. A. Terry	790,331
Core or mold making machine, Burkill & Sunderland	790,781
Corn sheller, G. F. Conner	790,289
Corset, F. V. Slonsky	790,534
Cotton chopper, B. L. Fikes	790,355
Crate, banana shipping, F. Schmitz	790,400
Cream ripener, T. L. Valerius	790,466
Cream, ripening, T. L. Valerius	790,467
Creasing and folding machine, J. R. Little	790,797
Cultivator, W. F. Hartig	790,300
Cultivator, R. Pederson	790,387
Cultivator attachment, J. M. Etiman	790,623
Current commutator machine, alternating, Winter & Eichberg	790,414
Current machine, alternating, C. W. Johnson	790,368
Currycomb, S. Johnston	790,843
Cutting table, T. M. Lillard	790,695
Cycle saddle, Brooks & Holt	790,717
Desk light, T. Smith	790,809
Dish or the like warmer, N. F. Boniface	790,612
Display case, revolving window shade, H. Klein	790,440
Display rack, McKinley & Osborne	790,383
Display stand, A. Josephson	790,438
Distilling apparatus, turpentine, H. Hirsh	790,635
Door hanger, T. Plice	790,524
Door securer, H. Notthoff	790,653
Draft equalizer, C. B. Cowles	790,785
Drain, gas trap, and backwater trap combined, cellar, F. Shay	790,322
Drier and separator, J. Waterhouse	790,605
Drip pan, non-explosive, H. C. Weitzel	790,543
Dust blower and sprayer, A. J. Collins	790,784
Dust proof wheel box, M. Sklovsky	790,707
Dye and making same, azo, J. Hagenbach	790,364
Dye and making same, nitroazo, J. Hagenbach	790,363
Electric current controlling means, G. J. Dorman	790,819
Electric cut-out switch, J. Frechette	790,789
Electric machine, A. F. Hemingway	790,569
Electric machine, dynamo, E. C. Wright	790,471
Electric machine, dynamo, B. A. Behrend	790,475
Electric motor controller, W. J. Warder, Jr.	790,541
Electrical apparatus, inductance and induction coil for, D. R. Lovejoy	790,581
Electrical device or circuit, R. J. Hewett	790,838
Electroplating apparatus, C. T. Pratt	790,747
Elevator door opening and closing device, H. Watson	790,334
Elevator load regulated starting and stopping device, L. W. Southgate	790,323
Elevator safety lock, L. Christiansen	790,678
Engine. See Expansible fluid engine.	
Engine frame bulkhead, Skinner & Glenn	790,402
Engine igniter operating device, gas or vapor, C. B. Harris	790,833
Engine receiver and reheater, compound, Burger & Williams	790,284
Engine reversing mechanism, explosion, T. L. & T. J. Sturtevant	790,856
Engine self-oiling mechanism, L. Skinner	790,461
Engraving machine, F. M. Swayze	790,328
Excavator boom, E. L. Byron	790,478
Expansible fluid engine, J. T. Halsey	790,829
Explosive engine, H. B. Steele	790,325
Explosive engine, J. D. Maxwell	790,374
Eyeglass mounting, F. C. Merry	790,448
Fabrics, manufacturing colored, C. Bucher	790,718
Fan base adjustment, C. R. Meston	790,377
Fastening device, L. Rodney	790,315
Feed water purifier, F. W. Cowern	790,346
Feeder, time stock, W. B. Hayes	790,835
Fence tie, E. J. Bowerfind	790,778
Fence, wire, E. F. Shellaberger	790,597
Fence, wire, J. E. Fredrick	790,725
Ferrochromium, producing, E. F. Price	790,392
Fiber cleaning machine, vegetable, McCauley & Winfrey	790,307
File box, J. C. Kirby	790,578
Filter beds for sewage, apparatus for automatically and alternately charging and discharging, W. A. Moore	790,520
Fire alarm apparatus, Gale & Davenport	790,822
Fire apparatus, J. R. Hopkins	790,839
Fire dog or andiron, Patton & Scroggs	790,745
Fire extinguishers, valve for automatic, J. Hunt	790,841
Fire plug hose hitch, J. Donovan et al	790,874
Fire shutter, automatic, G. F. Hall	790,632
Firearm, double barreled breech loading, O. A. Flocken	790,293
Firearm extractor, F. F. Burton	790,615
Fish line snell attachment, G. Yoerger	790,336
Fishing float, D. M. Jones	790,301
Fishing reel, H. B. Carlton	790,676
Fishing rod, L. L. Bartlett	790,419
Flange, fly, F. C. Billings	790,280
Flange wrench, J. F. Reddy	790,853
Flat iron, gas heated, A. Laffitte	790,731
Flax, hemp, or such like, rippling machine, applicable to, C. F. Petermann	790,802
Fleecing or napping machine attachment, Chatfield & Struthers	790,722
Floor and centering, Wight & Townsend	790,413
Flue cutter, D. E. Dozer	790,820
Fluid fuel burner, F. H. Lynn	790,734
Fluid pressure brake, H. R. Mason	790,305
Fluid pressure equalizing device, Manning & Armstrong	790,584
Flushing apparatus, C. W. Lendh	790,796
Fly trap, horse, J. McConnell	790,651
Folding box, Z. B. Webb, reissue	12,350
Fruit cleaner, G. W. Harvey	790,834
Fruit picker's bag, F. L. Hepner	790,837
Fumigating compound, H. V. Walker	790,469
Fumigation, H. V. Walker	790,468
Funnel, W. T. Taliaferro	790,463
Furnace, F. C. Armstead	790,339
Furnace, W. N. Best	790,777
Furnace, J. H. Anderson	790,864
Furnace charging mechanism, blast, D. Baker	790,271
Furnace grate, boiler or other, Crosthwaite & Westerby, reissue	12,351
Furnace radiator, R. A. May	790,699
Furnace wall construction, D. Baker	790,269
Fuse for shells, percussion, J. B. Semple	790,401
Garment hanger, P. Steiger	790,708
Garment holder, M. M. Adams	790,337
Gas burner, incandescent or other atmospheric, G. & J. W. Bray	790,713
Gas burner, open air, C. A. Harvey	790,365
Gas condensing apparatus, O. N. Guldlin	790,297
Gas, generating combustible, C. Ellis	790,488
Gas generator, G. Apfel	790,418
Gas generator, acetylene, C. W. Beck	790,274
790,276, 790,277, 790,278, 790,867,	790,868 790,869
Gas generating interlocking mechanism, F. Thuman	790,465
Gas lighting burner, incandescent, J. W. Bray	790,714
Gas making apparatus, O. N. Guldlin	790,296
Gas, manufacturing combustible, C. Ellis	790,486
Gas producer apparatus, C. Ellis	790,487

"Bristol
A STRAIGHT TIP
Prepare for the approaching fishing season by equipping yourself with a "BRISTOL" Steel Fishing Rod.
Many rods are weak in the tip joint but the tips in the "BRISTOL" Rods are built to last as long as any part of the rod; that's one reason why they are so universally popular with campers, canoeists, guide and other rough and ready fishermen.
Handsome Catalogue Free. Our new Catalogue, cover in colors and illustrated throughout, will be sent on application.
The Horton Mfg. Co.
58 Horton Street, Bristol, Conn.

THE Nulite Vapor GAS Lamps
For Home, Store and Street
We also manufacture Table Lamps, Wall Lamps, Chandeliers, Street Lamps, Etc. 100 Candle Power seven hours ONE CENT. No Wicks. No Smoke. No Odor. Absolutely safe. THEY SELL AT SIGHT. Exclusive territory to good agents. Write for catalogue and prices.
Chicago Solar Light Co. Dept G, Chicago

Truscott
Pleasure Craft
are not ordinary boats in quality or appearance. You can tell a Truscott —you can trust one.
Won the GRAND PRIZE at St. Louis—the first and only Grand Prize awarded makers of small boats or engines at any exposition anywhere Send stamps for catalogue. Our quarterly "The Launch" is free.
TRUSCOTT BOAT MFG. CO.
Dept. 629, St. Joseph, Mich.

Satisfaction Guaranteed

WE BUILD

Special Machinery, Machine Parts, Interchangeable Machinery, Punches and Dies, Gear Cutting, Etc.

The John R. Williams Co. Machine Works
114-118 Liberty Street, New York, N. Y.
120-126 Pacific Street, Newark, N. J.



The Wonderful **"AUTO-MARINE MOTOR" $37.50** ENGINE ONLY

Weight 37 1-2 lbs. Height 11 1-4 in.

CONVERT YOUR ROW BOAT INTO A LAUNCH

Rated at 1 h. p. Has shown nearly 2 h. p. No valves, gears, springs or cams. Jump spark. Reversible. Speed control. Only three moving parts. Could not be made better if it cost five times as much. **Order now**—they are selling so fast you may be disappointed in the spring. Auto-Marine Motors from 1 to 20 h. p.

DETROIT AUTO-MARINE CO., 75 East Congress Street, Detroit, Mich.
Formerly Detroit Lackawana Co.

JEFFREY ELEVATING--CONVEYING--POWER
Transmission--Screening--Dredging--Coal Cutting
Drilling--Hauling--Washing Machinery.

For Catalogues address
THE JEFFREY MFG. CO.
COLUMBUS, OHIO, U.S.A.
NEW YORK DENVER

ROAD BUILDING MACHINERY, AND CONTRACTORS SUPPLIES.
ACME ROAD MACH'Y CO., FRANKFORT, N.Y. U.S.A.

Experimental Electrical Outfits

from which the following practical machines can be made: Dynamo or Motor (high or low volts); Gas Engine Dynamo; Motor-Dynamo; Dynamotor; Booster; Single Phase A. C. Rectifier; Single Phase A. C. Motor; Motor-Driven Self-Exciting A. C. Generator, etc. Parts are interchangeable throughout. Can be purchased altogether or one piece at a time. Bulletin B mailed free for the asking.

PARSELL & WEED, 129-131 West Thirty-first Street, New York, U. S. A.

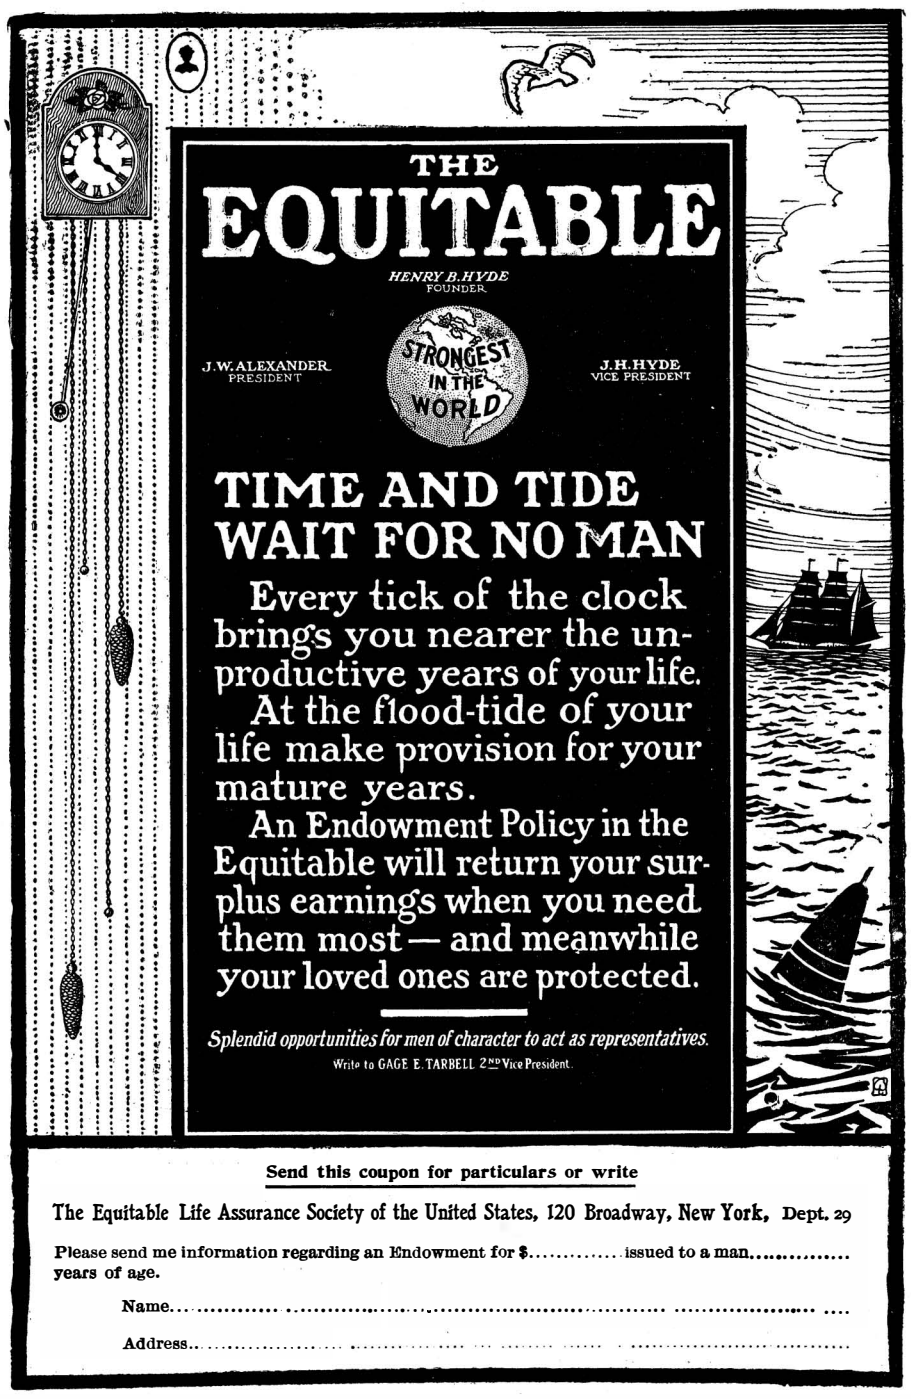
THE
EQUITABLE
HENRY B. HYDE
FOUNDER
J. W. ALEXANDER
PRESIDENT
STRONGEST IN THE WORLD
J. H. HYDE
VICE PRESIDENT
TIME AND TIDE WAIT FOR NO MAN
Every tick of the clock brings you nearer the unproductive years of your life.
At the flood-tide of your life make provision for your mature years.
An Endowment Policy in the Equitable will return your surplus earnings when you need them most — and meanwhile your loved ones are protected.
Splendid opportunities for men of character to act as representatives.
Write to GAGE E. TARBELL 2ND Vice President.

Send this coupon for particulars or write

The Equitable Life Assurance Society of the United States, 120 Broadway, New York, Dept. 29

Please send me information regarding an Endowment for $..... issued to a man..... years of age.

Name.....

Address.....

Valuable Books

REVISED and ENLARGED EDITION

The Scientific American

Cyclopedia

Of Receipts, Notes and Queries.

15,000 Receipts. 734 Pages.

Price, $5.00 in Cloth. $6.00 in Sheep. $6.50 in Half Morocco. Post Free.



This work has been revised and enlarged,

900 New Formulas.

The work is so arranged as to be of use not only to the specialist, but to the general reader. It should have a place in every home and workshop. A circular containing full **Table of Contents** will be sent on application.

Those who already have the Cyclopedia may obtain the

1901 APPENDIX.

Price, bound in cloth, $1.00 postpaid.

JUST PUBLISHED

Scientific American Reference Book

12mo. 516 Pages. Illustrated. 6 Colored Plates. Price $1.50, postpaid



The result of the queries of three generations of readers and correspondents is crystallized in this book, which has been in course of preparation for months. It is indispensable to every family and business man. It deals with matters of interest to everybody. The book contains 50,000 facts, and is much more complete and more exhaustive than anything of the kind which has ever been attempted. The "Scientific American Reference Book" has been compiled after gauging the known wants of thousands. It has been revised by eminent statisticians. Information has been drawn from over one ton of Government reports alone. It is a book of everyday reference—more useful than an encyclopedia, because you will find what you want in an instant in a more condensed form. Sixty years of experience alone have made it possible for the publishers of the SCIENTIFIC AMERICAN to present to the purchasers of this book a remarkable aggregation of information.

American Tool Making and Interchangeable Manufacturing

By JOSEPH V. WOODWORTH

This is a complete practical treatise on the Art of American Tool Making and System of Interchangeable Manufacturing as carried on to-day in the United States. In it are described and illustrated all of the different types and classes of small Tools, Fixtures, Devices and Special Appliances which are, or should be, in general use in all machine manufacturing and metal working establishments where economy, capacity and interchangeability in the production of machined metal parts are imperative.

All of the tools, fixtures and devises illustrated and described have been, or are, used for the actual production of work, such as parts of Drill Presses, Lathes, Patented Machinery, Typewriters, Electrical Apparatus, Mechanical Appliances, Brass Goods, Composition Parts, Mould Products, Sheet Metal Articles, Drop Forging, Jewelry, Watches, Metals, Coins, etc.

The treatment of each tool described and illustrated is such as to enable any Practical Man to Design, Construct and use Special Tools, Dies and Fixtures, for the Rapid and Accurate Production of Metal Parts interchangeably.

To the Machinist, Tool Maker, Designer, Die Maker, Superintendent, Manager and Shop Proprietor this book shows the 20th Century Manufacturing Methods and Assists in Reducing the Expense and Increasing the Output and the Income. A book on the System of Interchangeable Manufacturing—The System that has Won for the United States the Industrial Supremacy of the World.

535 Pages Bound in Cloth 600 Illustrations

PRICE $4.00

JUST OUT

Modern Gas-Engines and Producer-Gas Plants

By R. E. MATHOT, M.E.

314 Pages Bound in Cloth 152 Illustrations

Price $2.50, Postpaid

A Practical Guide for the Gas-Engine Designer and User.

A book that tells how to construct, select, buy, install, operate, and maintain a gas-engine.

No cumbrous mathematics: just plain words and clear drawings.

The only book that thoroughly discusses producer-gas, the coming fuel for gas-engines. Every important pressure and suction producer is described and illustrated. Practical suggestions are given to aid in the designing and installing of producer-gas plants.

Write for descriptive circular and table of contents.

MAGIC

Stage Illusions and Scientific Diversions, including Trick Photography.

This work appeals to old and young alike, and it is one of the most attractive holiday books of the year. The illusions are illustrated by the highest class of engravings, and the exposés of the tricks are, in many cases, furnished by the prestidigitateurs themselves. Conjuring, large stage illusions, fire-eating, sword-swallowing, ventriloquism, mental magic, ancient magic, automata, curious toys, stage effects, photographic tricks, and the projection of moving photographs are all well described and illustrated, making a handsome volume. It is tastefully printed and bound. Acknowledged by the profession to be the **Standard Work on Magic.**

By A. A. HOPKINS. 568 pages. 420 illus. Price **$2.50.**

MUNN & CO.

361 Broadway New York City

Gate, H. Holste	790,433
Gear for motors, transmitting and reversing, W. Bruns	790,424
Gearing, variable, R. N. Dyer	790,350
Gearing, variable speed, R. N. Dyer	790,349
Gearing, variable speed, E. H. Belden	790,421
Gearing, variable speed, J. E. & J. C. Caps	790,425
Geodetic or similar instruments, means for suspending the supporting rods of, Pfeiffer & Hein	790,850
Glass blowing machine, C. J. Koenig	790,505
Glass furnace pot filling apparatus, J. T. Turner	790,332
Glass insulators or other glass articles, machinery for the manufacture of, H. M. Brookfield	790,715
Glassware manufacturing machinery, H. M. Brookfield	790,716
Grain separator, F. S. Osborne	790,704
Grapple, V. Goetz, Jr.	790,827
Grinding machine, E. C. Schrader	790,705
Grinding mill, H. W. Clough	790,619
Gypsum mortar and utilizing dead burnt gypsum, improving, Heintzel & Cramer	790,366
Hammer, power, G. Bignell	790,553
Hammer, steam, A. L. Eicher	790,566
Harness attachment, A. S. Rudolph	790,594
Harness or the like, draw hook for, H. Ruppert	790,317
Harrow, G. Lettenmyer	790,443
Harrow draw bar, B. P. Lynds	790,444
Harrow, riding, W. Merrill	790,376
Harvester, corn, D. E. Anthony	790,711, 790,865
Hay press, C. A. Bridges	790,555
Hay ricker, J. N. Sorrell	790,855
Heat, device for effecting the radiation of, S. W. Zent	790,416
Heater, C. E. McPherson	790,384
Heel polishing machine, W. C. Corman	790,679
Hinge, seat, A. A. Lytle	790,798
Hoe or weeder, C. W. Stuart	790,760
Hoisting apparatus, T. Ogden	790,741
Horse releasing mechanism, A. P. Weeks	790,710
Horseshoe, F. C. & W. T. Canavan	790,675
Horseshoe, removable, A. R. Ward	790,859
Hose coupling, Joy & Clark	790,638
Hose coupling, M. Hendricks	790,685
Hot air register, C. H. Foster	790,625
Hub ferrule, E. Lazrowitch	790,692
Hydrant or fire plug, E. F. Bohne	790,423
Hydrocarbon burner, G. S. Bennett	790,422
Ice handling machinery, H. H. Porter, Jr.	790,310
Infusion device, M. H. French	790,626
Ingots, compressing metal, R. W. Hunt	790,435
Ink well, W. C. Galbraith	790,628
Insect trap, A. C. Crofford	790,620
Jar and fastener therefor, Ranney & Tinkham	790,750
Jar closure, Ranney & Tinkham	790,749
Journal bearing, spring swivel, J. W. Jones	790,844
Knitted fabric, sectional roll of, F. B. Wildman	790,771
Knitted fabrics, cutting and winding mechanism for, F. B. Wildman	790,770
Knitting machine, E. J. Franck	790,357
Knitting machine cam adjusting device, circular, F. B. Wildman	790,772
Knitting machine, circular, W. T. Barratt	790,672
Knitting machine stop motion, T. W. Tustin	790,604
Ladder, W. G. Bertram	790,552
Ladder, R. Schilling	790,807
Lamp, acetylene gas generating, C. W. Beck	790,273, 790,275
Lamp bulbs, apparatus for exhausting incandescent, C. Hoelscher	790,730
Lamp burner shade support, F. N. Cooley	790,345
Lamp, electric, M. W. Hanks	790,499
Lamp, electric, E. Bennett	790,551
Lamp, electric glower, H. N. Potter	790,525
Lamps, system of distribution for multiple-glower, A. J. Wurts	790,472
Latch and lock, C. A. Prescott	790,659
Latch, gate, W. B. Jones	790,637
Lathe apron, N. D. Chard	790,872
Lathe head stock, Chard & Lodge	790,873
Lathe turret actuating mechanism, Potter & Johnston	790,312
Laundry, M. S. Cobb	790,288
Leaf and binding device, A. J. Hansell	790,831
Life preserver, S. Friedman	790,682
Light. See Desk light	
Linotype machine, P. T. Dodge	790,348
Linotype machine, R. F. Mercer	790,447
Liquid meter, J. W. Ledoux	790,693
Locomotive tender, C. J. McCarthy	790,650
Locomotive wheels and their accessories while assembled, apparatus for turning, Moll & Zeller	790,519
Loom, automatic filling replenishing, G. H. Haworth	790,430
Loom for weaving pile fabrics, J. McKay	790,738
Looms, multiplier for dobby, Girard & McCullough	790,824
Loop banding machine, A. E. Rhoades	790,458
Lubricating apparatus, H. Hamelle	790,498
Lubricating compound, J. Menatowich	790,308
Mail bag delivery apparatus, M. J. Finn	790,567
Mangle, C. T. Gilmore	790,360
Manhole cover, J. F. Dorsey	790,562
Manure spreader, L. Kniffen	790,441
Manure spreader, A. F. Manning	790,583
Match making machine, L. H. Montross	790,306
Mattress frame or support, A. Mardis	790,799
Measuring device, check controlled, J. Kies	790,640
Measuring the deflections of rails or girders, device for, E. Hermsdorf	790,728
Medical ozonizer, M. Otto	790,655
Metal melting furnace, portable, J. Porteous	790,311
Metals and oxids from solutions, recovering, A. Gutensohn	790,429
Metals or alloys, producing low carbon, E. F. Price	790,395, 790,396, 790,397
Metallic compounds, reducing, E. F. Price	790,389, 790,390
Microphone, P. J. Tariel	790,603
Milking machine, L. Burrell	790,557
Milling machine, cam, S. A. Hand	790,298
Mirror support, E. A. & E. W. Thayer	790,537
Musical instrument, F. Leber	790,442
Musical instrument player, mechanical, L. U. Jobes	790,575
Nitrated carbohydrates, making, A. Hough	790,840
Oil burner, crude, J. W. Pippin	790,657
Oil burner, generating, P. S. Spiller	790,666
Oil can, J. W. Bullock	790,719
Oil gas furnace, J. H. Anderson	790,863
Oil press mat, R. F. Werk	790,606, 790,607
Oiling device, axle, C. M. McFarland	790,451
Oiling roads, levees, etc., I. E. Smith	790,403
Ordnance, W. R. Smith	790,664
Oven, baker's, B. Yere	790,862
Oxygen from hypochlorites, production of, G. F. Jaubert	790,504
Package feed mechanism, Peters & Hungerford	790,454
Packing, A. C. Brantingham	790,282
Packing, metallic, F. Nenzel	790,452
Packing rotating shafts, C. A. Parsons	790,744
Packing, shaft, W. L. R. Emmet	790,352
Paint and preparing same, H. V. Dunham	790,821
Pan and stove lid lifter, combined, E. L. Watrous	790,411
Pantograph for embroidering, M. Trautmann	790,409
Paper bag machine, W. A. Lorenz	790,304
Paper feeding machine, T. C. Dexter	790,681
Pattern, printed dress, W. Freeman	790,568
Pen, fountain, F. E. Shaw	790,596
Phonographic recorder, P. Weber	790,542
Phonographic records, duplicating, T. A. Edison	790,351
Photographic developing apparatus, C. H. Shaw	790,532
Photographic printing paper, sensitive, E. C. Morgan	790,647
Pile of fabrics, machine for cutting, Keighley & Netherwood	790,577
Pipe bending machine, F. M. Stambaugh	790,600
Pipe coupling, P. N. Staff	790,810
Pipe rounding device, J. F. Linehan	790,643
Pipes, making cement lined metal, J. T. Langford	790,372
Pipes, manufacture of, G. H. Lloyd	790,644

Catch Fish by Electricity

$1.00 complete OUTFIT

The Electriclure

Any kind of fish may be caught by this new method at will. No State in the Union has passed any law against this practice; it's sure every time and great sport, without danger to operator (it fools the big fish). The original sample cost us $1,000. Only a limited number of these outfits can be made this year, so order early. Outfit all complete only **$1.00** with full instructions. Can be carried in the fisherman's ordinary tackle box. By express prepaid, 20 cents extra. Dealers and agents make big money selling these. Send for catalogue of fishing tackle, etc.

The VIM CO., Dept. 19, 68 E. Lake St., Chicago, Ill.

FOR LEVELING UP

For quickly and accurately leveling up work no handier tool could be made than our handsome and serviceable Cross Level. Made of nicely enameled iron with polished ends it is at once a handy and fine-looking tool. It measures 2½ inches by 3 inches by ⅝ inch, and costs only **65 cents.**

Catalogue free on application.

SAWYER TOOL MFG. CO. - Fitchburg, Mass.

A. W. Faber.

Manufactory Established 1761.

Lead-Colored Slate Pencils, Rubber Bands, Erasers, Inks, Penholders, Rulers, Water Colors. Improved Calculating Rules.

Send for descriptive Circular S.

44-60 East 23d Street, New York, N. Y.

Grand Prize, Highest Award, St. Louis, 1904.

ELECTRIC LAUNCH MOTOR.—THE design in this paper is for a motor of unusual simplicity of construction, which can easily be built by an amateur at small cost. It is intended for a boat of about 24 feet over all and 4 feet 6 inches beam, drawing 18 inches, and is capable of propelling such craft at a speed of 7 miles per hour. Illustrated with 21 cuts. See SCIENTIFIC AMERICAN SUPPLEMENT, No. **1202.** Price 10 cents by mail, from this office and from all newsdealers.



An Automatic Pump

that works wherever there is a spring, creek or pond. It costs but little and works day and night without attention or expense. **The Niagara Hydraulic Ram,** USED AND ENDORSED BY THE U. S. GOVERNMENT. Is made in all sizes. Free booklet and terms to agents upon request.

Niagara Hydraulic Engine Co
CHESTER, PA.
or 140 Nassau St., New York, N. Y.

The Genuine Armstrong's STOCKS and DIES

Acknowledged to be the best. Different sizes and capacities. Write for catalog.

THE ARMSTRONG MFG. CO., Bridgeport, Conn.
New York Office, 139 Centre Street

BUFF

TRANSITS AND LEVEL *are used exclusively on the largest works where utmost precision is required. Send for new catalog No. 22.*

THE BUFF & BUFF CO.
Boston, Mass.

SUBSTITUTES FOR COAL

Are described from the technical standpoint in the following Scientific American Supplements.

Each Supplement named costs 10 cents by mail:

COMMERCIAL USES OF PEAT. SCIENTIFIC AMERICAN SUPPLEMENT **1324.** The article enumerates the principal peat bogs and states their financial possibilities.

GERMAN BRIQUETTING MACHINERY IN AMERICA. SCIENTIFIC AMERICAN SUPPLEMENT **1411.** A valuable economic report.

A NEW ELECTRICAL PROCESS FOR THE MANUFACTURE OF PEAT FUEL. SCIENTIFIC AMERICAN SUPPLEMENT **1492.** The paper fully describes the Bessey process.

LIGNITE, PEAT, AND COAL DUST FUEL. SCIENTIFIC AMERICAN SUPPLEMENT **1426.** A careful consideration of German methods.

MOOR CULTIVATION AND PEAT INDUSTRY IN GERMANY. SCIENTIFIC AMERICAN SUPPLEMENT **1481.** An excellent critical review.

DOMESTIC COKE AND BRIQUETTES FROM RETORT COKE OVENS. By R. M. Atwater, SCIENTIFIC AMERICAN SUPPLEMENT **1211.** A valuable monograph by an expert.

THE WHITE MINERAL PRESS FOR BRIQUETTING. SCIENTIFIC AMERICAN SUPPLEMENT **1224.** An article describing and illustrating an American briquetting machine.

Price 10 cents each, by mail.

Order through your Newsdealer or from

MUNN & COMPANY

361 Broadway NEW YORK

Pipes, manufacture of earthenware sanitary, R. Stanley	790,324
Pistol breech sight, automatic, H. Hirsh	790,634
Plane handle, adjustable, F. A. Shontz	790,533
Planter and fertilizer distributer, W. E. H. Searcy	790,460
Planter and fertilizer distributer, combined, Secrest & Edwards	790,756
Planter, corn, L. P. Graham	790,630
Plastic material mold, A. W. Mason	790,697
Platform, adjustable, H. Boelter	790,341
Pliers, J. D. Harper	790,500
Plow, A. J. Johnson	790,686
Plow, A. Castelin	790,721
Plow, Pearce & Beaver	790,746
Plow, combined grubbing, subsoiling, and turning, H. W. Toler	790,464
Plow harrow attachment, R. H. Richards	790,751
Plow soil pulverizing attachment, H. A. Wilberg	790,769
Plumb, J. W. Auld	790,813
Pneumatic despatch tube apparatus, O. S. Pike	790,456, 790,457
Pneumatic separator, D. L. Adelsperger	790,417
Pneumatic spring, B. Borland	790,476
Pocket, secret double safety, C. H. Scott	790,595
Portable drill, P. R. Anton	790,268
Power transmission mechanism, variable speed, M. Guttner	790,362
Power transmitting system, A. N. Olson	790,801
Press. See Coining or other press.	
Pressure regulating device, C. A. Carlson	790,287
Printing device, time, T. Carney	790,677
Printing machine, Scott & Swindells	790,530
Printing machine, W. Scott	790,531
Printing press, flat bed cylinder, W. S. Huson	790,574
Printing press, platen, M. Rockstroh	790,755
Printing presses, etc., bed roll or antifriction roller arrangement for, G. P. Fenner	790,788
Prune dipper and spreader, C. J. Kurtz	790,580
Pulp treating and paper making machinery, Parker & Cutter	790,589
Pump, centrifugal, E. G. Harris	790,683
Pump, centrifugal, Lea & Degen	790,795
Pump, centrifugal or velocity, L. H. Nash	790,702
Pump, self-measuring oil, Davis & Shellabarger	790,786, 790,787
Punch feed mechanism, Greenleaf & Haden	790,361
Punching machine carrying and guiding apparatus, J. J. Davies	790,559
Rail joint, J. W. Turton	790,539
Rail joint, P. F. Snyder	790,590
Rail joint, C. Haman	790,633
Rail joint, compromise, B. Wolhaupter	790,608
Rail tie, E. Powell	790,658
Railway brake apparatus, C. J. Fisher	790,493
Railway cross tie made of concrete, steam or electric, A. W. Wolfe	790,670
Railway crossing, A. Hollinger	790,367
Railway frog, J. E. Graham	790,629
Railway frog, G. D. Smith	790,663
Railway grip, cable, W. O. Gunckel	790,828
Railway rail anchor, G. F. Fields	790,354
Railway signaling system, B. F. Saurman	790,320
Railway system, protected third rail electric, H. A. Thomsen	790,538
Railway tie, J. L. Pope	790,803
Railway tie, composite, J. MacMartin	790,373
Railway tie, metal, R. E. L. Maxey	790,698
Railway track rails from creeping, means for preventing, J. R. Leighty	790,694
Range boiler, V. Wilhelmi	790,667
Razor, F. Kampfe	790,439
Records or blanks, producing molded, Miller & Pierman	790,518
Reflector, W. D. Ryan	790,399
Refrigerator door fastener, R. E. Jones	790,791
Rein guide, harness, C. H. Young	790,610
Rifle carrier, repeating, H. B. Boyer	790,385
Rock drill mount, M. Kuzel	790,506
Rotary cleaner, W. D. Labadie	790,371
Rotary engine, A. F. Ford	790,356
Rotary engine, reversible, H. E. Parry, et al.	790,523
Rotor construction, L. H. Dunker	790,485
Rubber balloon bags, mold for making, Faber & Seal	790,491
Saddletree, A. Arter	790,671
Sample case, W. Thompson	790,858
Sanitary appliance, J. H. McCall	790,701
Sash balance connection, A. Weingaertner	790,412
Sash fastening, storm, F. Janecek	790,842
Sawing machine, wood, J. F. Rosback	790,316
Scale, price computing, I. C. Koehne	790,794
Scenery trimmer, J. H. Channon	790,343
Seal, H. Lohse	790,645
Seal or lock, metal, F. E. Merrill	790,800
Seeding machine, S. H. Jones	790,576
Sewing machine, chain stitch, Chauvet & Coulter	790,783
Sewing machine cutter attachment, Zimmerman & Hughes	790,473
Sewing machine, double chain stitch, Chauvet & Coulter	790,782
Sewing machine folding attachment, J. H. De Nike	790,560
Sewing machine guide, H. Bryce	790,780
Sewing machine, shoe, French & Meyer	790,790
Shade adjuster, window, W. C. Organ	790,703
Shade, window, M. L. Hansen	790,832
Shaft hanger, C. O. Wood	790,609
Sheep shearer, H. S. Burley	790,285
Shelf bracket, G. C. Koch	790,793
Sheller. See Corn sheller.	
Shutter attachment, window, L. F. Leininegar	790,732
Shuttle spindle, W. R. Bell	790,611
Sign, working, C. A. McNeal	790,739
Silk throwing mechanism, Salathe & Tamberlin	790,805
Skirt, E. E. Harman	790,299
Skirt marker, J. Johnson	790,687
Smelting furnace, C. E. Glafke	790,825
Smelting iron ores and producing ferrochromium, E. F. Price	790,393
Smelting metallic compounds, E. F. Price	790,391
Smelting refractory ores, E. F. Price	790,394
Smoothing machine, edge, W. Bartholomew	790,549
Snow plow, E. J. Grant	790,295
Soap cake, L. S. Samuel	790,319
Sound record or blank, Miller & Pierman	790,517
Sound records or blanks, apparatus for making, Miller & Pierman	790,516
Spark and soot arrester, R. E. Springle	790,758
Spark plug, G. L. Herz	790,571
Spool, G. H. Reynolds	790,662
Spool holder, Villinger & MacMillan	790,709
Spring trip, F. C. Warne	790,410
Sprouting apparatus, J. Von der Kammer	790,369
Stacker, straw, J. B. Bartholomew	790,340
Stall, cattle, A. Jenson	790,437
Stamp affixing device, Blagden & Tiensch	790,815
Stanchion, C. M. Paxton	790,386
Staple setting implement, F. Wiseman	790,773
Steam engine, H. F. Frisbie	790,358
Steam generator, J. S. Kiddey	790,792
Steam generator, flash, R. J. Miner	790,378
Steam separator, E. F. Osborne	790,849
Steam trap, J. E. Swendeman	790,602
Stone block molding machine, artificial, A. Peterson	790,388
Stone blocks, molding artificial, E. E. Crouch	790,481
Stone mold, artificial, E. E. Crouch	790,480
Stop motion for textile machinery, electric, J. B. Whitney	790,768
Stump burner, C. N. Hubbard	790,636
Suit cases, etc., stay for, F. L. Demartini	790,483
Suspenders, E. E. Robertson	790,314
Sweep mill, A. A. Ambler	790,338
Swing gate, farm, J. A. Clements	790,618
Swingletree or doubletree, E. Haiman	790,727
Switch actuating mechanism, A. Matz	790,846
Switch operating mechanism, E. Moore	790,450
Tag, C. E. Mitchem	790,449
Talking machine sound conductor, A. C. Wiechers	790,546
Tanks, tool for cutting holes in metal, M. Martin	790,735
Telephone call attachment, Harveston & Mudgett	790,684

DON'T BUY GASOLINE ENGINES

UNTIL YOU INVESTIGATE "THE MASTER WORKMAN," a two-cylinder gasoline engine superior to all one cylinder engines; revolutionizing gas power. Costs **Less to Buy** and **Less to Run.** Quickly, easily started. No vibration. Can be mounted on any wagon at small cost—portable, stationary or traction. Mention this paper. SEND FOR CATALOGUE. **THE TEMPLE PUMP CO., Mfrs., Meagher & 15th Sts., Chicago.** THIS IS OUR FIFTY-FIRST YEAR.

TERRE HAUTE, IND., February 17, 1905.
BRENNAN MOTOR CO., Syracuse, N. Y.
Gentlemen—The writer has been operating one of your motors, a double cylinder 8 horse power, for the past two seasons and wishes to state that the motor has given excellent satisfaction and the repairs on same has been nothing whatever. Would state that with the exception of twice I do not know of the motor stopping of its own accord during the season. I am satisfied that I have had excellent good luck and wish to recommend the Brennan Motor to any one wishing a motor for an automobile.



Brennan Standard Motor Mounted with Individual Clutch Gear.

Yours truly,
Name given on application.

Iængwidʒiz
BEETHOVEN PICTURE, by Balestrieri of Paris, in sepia or black, postfree for two dimes or 20 cents in stamps
LANGUAGES PRINTING COMPANY
Languages Building, 15 West 18th St., New York

DESIGNER WANTED
Excellent opportunity for first-class designer in fishing reel and rod factory. State age, experience, salary and references.
Wm. Shakespeare, Jr., Kalamazoo, Mich.

The Monthly Journal **CONCRETE** is the standard publication upon Portland cement construction, and invaluable to cement workers, engineers and contractors. Send $1.00 for a year's subscription or write for special offer. **Concrete Publishing Co., Dept. F, Detroit, Mich.**

CHEAP SPARK-COIL PARTS
Secondary windings; primaries; cores; vibrators, etc., for slight advance over cost of materials. Don't pay $20 to $50. Don't attempt fine wire winding. Ask us questions. N. E. COIL WINDING CO., Atlantic, Mass.

CASH FOR PATENT
Will pay good price for patent on some new marketable article or mechanical improvement.
I. R. PARSONS, 107 W. 64th St., New York

PATENTS WANTED for clients. Those suitable for mail order business preferred. Corporations formed and stock placed for valuable inventions.
W. S. CHAMBERLIN, 11 Broadway, New York.

Are you interested in Patents, Model or Experimental work? Our booklet entitled
WHAT WE DO—HOW WE DO IT
will be sent to you on request.
KNICKERBOCKER MACHINE WORKS, Inc., 8-10-12 Jones Street, New York.

BRAZE CAST IRON WITH BRAZIRON
Cheap, easy. Send 12 cents in stamps for information, testimonials and samples of Braziron and flux sufficient for several jobs.
THE A. & J. MANUFACTURING COMPANY
9 S. Canal St., Chicago, Ill.

TYPEWRITERS ALL MAKES
All the Standard machines SOLD or RENTED ANY-WHERE at HALF MANUFACTURERS' PRICES, Shipped with privilege of examination. Send for Cat.
Typewriter Emporium. 203 LaSalle St., Chicago

PLUMBING SCHOOLS
WANTED—Men and boys to learn plumbing trade. We cannot supply demand for graduates. $4.50 to $5.00 per day. Eight weeks completes course. Earn while learning. Address for catalogue COYNE BROS. Co., Plumbing Schools, Cincinnati, O., St. Louis, Mo. Employment guaranteed or money refunded.

BLISS ELECTRICAL SCHOOL
214 G Street N. W., Washington, D. C.
Offers a theoretical and practical course in ELECTRICITY complete in one year. Students actually construct Dynamos, Motors, and electrical instruments.
13th year opens September 27. Send for free Catalog.

SAN JOSE
Santa Clara Valley
CALIFORNIA

Soil Unsurpassed in Fertility.
Climate Equable and Healthful.
Educational Facilities Leading the World.
Opportunities for the Home Seeker.
Gilt Edge Propositions for the Investor.
Magnificent Enjoyment for the Tourist.
Send a 2c. stamp for our booklet.

SAN JOSE CHAMBER OF COMMERCE
San Jose (Hozay), California
Free Information Bureau and Exhibit, Palace Hotel, San Francisco.
Mention SCIENTIFIC AMERICAN

50 Years' Experience
PATENTS
Trade Marks, Designs, Copyrights, Etc.
Anyone sending a sketch and description may quickly ascertain our opinion free whether an invention is probably patentable. Communications strictly confidential. Handbook on Patents sent free. Oldest agency for securing patents.
Patents taken through MUNN & Co. receive *Special Notice*, without charge, in the
Scientific American
A handsomely illustrated weekly. Largest circulation of any scientific journal. Terms, $3 a year; four months, $1. Sold by all newsdealers
MUNN & CO. 361 Broadway, **New York**
Branch Office 625 F St. Washington, D. C.

Telephone desk attachment, portable, E. Ocumpaugh	790,740
Telephone multiple switch, C. V. Beaver	790,814
Telephone, party line, H. M. Bascom	790,550
Telephone switch, electric, G. F. Archer	790,812
Telephone system, J. G. Roberts	790,854
Telephone transmitter, H. M. Gail	790,428
Thermostat, H. H. Blackman	790,870
Thill and tongue support, W. Padden	790,453
Threshing machine, F. Zucker	790,775
Tire, F. Mesinger	790,646
Tire bolt wrench machine, C. L. V. Mundhenk	790,587
Tire, pneumatic, Bellingham & Bloomfield	790,279
Tire, vehicle, G. S. Squires	790,404
Tire, vehicle, T. R. Palmer	790,742
Tongue switch, W. C. Wood	790,335
Tool, combination, C. Heilrath	790,432
Tool handle, C. E. Borner	790,477
Tool handle, Reynolds & Gordon	790,590
Tool holder, boring, J. & W. Carr	790,479
Tool step feed mechanism, machine, J. Mills	790,847
Toy, O. A. Prior	790,660
Trace carrier, T. C. Burton	790,616
Trammel, F. E. Buxton	790,286
Trimmer. See Scenery trimmer.	
Trolley, J. B. Humphrey	790,434
Trousers stretcher, R. C. Mitchell	790,848
Trucks or similar vehicles, frame for mine, G. Stott	790,759
Trunk, display sample, S. E. Winship	790,669
Trunk fixture, O. Rangnow	790,748
Truss, G. L. Gerard	790,359
Tubular fabric, producing, J. A. Firsching	790,492
Tufting apparatus, E. C. Hartshorn	790,501
Tug, harness, H. H. Drohn	790,621
Turbine, A. Davidson	790,680
Turbine, elastic fluid, A. R. Dodge	790,426
Turbine, steam, J. Stumpf.....790,405 to	790,408
Turret attachment, R. G. Denyes	790,484
Typewriting machine, W. J. Barron	790,272
Typewriting machine, B. A. Brooks	790,283
Typewriting machine, W. C. Farnum	790,292
Typewriting machine, C. D. Rice	790,591
Typewriting machine, S. Nielsen	790,652
Umbrella stick, E. C. Kuhn	790,642
Urethral or other cavities, irrigator for, E. S. Estlingen	790,353
Valve, center, T. Redman	790,313
Valve for explosive engines, starting, H. A. Tobey	790,764
Valve gear mechanism, M. E. Clark	790,344
Valve mechanism, W. R. Templeton	790,536
Valve, train pipe, E. H. Gold	790,294
Vehicle top, A. W. Hall	790,631
Vehicle traction attachment, W. W. Clark	790,723
Vehicle, two-wheeled, T. V. Edwards	790,486
Vending machine, Dierdorff & Snider	790,561
Veterinary appliance, electrical, A. Paxton	790,309
Vise, universal, H. J. Valentine	790,540
Wagon corner device, W. T. Johnson	790,688
Wagon dump and elevator, J. Q. & A. T. Adams	790,547
Washing machine, P. P. Kiel	790,639
Watch, J. Mazer	790,509
Watchwinding indicator, J. Mazer, 790,508, 790,510 to	790,513
Water cleansing device, W. R. Park	790,743
Water dividing furrow joint, O. H. Hicks	790,573
Water elevator, W. A. Douglas	790,563
Water gage, J. McAfee	790,737
Water purifying plants, lime saturator for, E. Declercq	790,482
Water tube boiler, S. Thurstensen	790,763
Weighing apparatus, milk, R. C. Mealey	790,375
Weighing mechanism, Salo & Hoag	790,529
Weighing mechanism for refrigerators, Salo & Hoag 790,527,	790,528
Welding boiler tubes, R. L. Woodrum and W. A. Brown	790,470
Whip socket and rein holder, combined, P. Jacobs	790,503
Winding spool spindle and bearing therefor, Salathe & Tamberlin	790,526
Window guard, J. A. Swenson	790,535
Window lock, automatic ventilating, H. Ernst	790,490
Window screen, H. L. Roberts	790,752
Window, self-closing, F. C. Kasch	790,370
Wire stretcher, C. F. Lamp	790,691
Wood grinder, C. Fancher	790,624
Wrench, H. J. Wilson	790,668
Wrench, L. Haneke	790,830
Wrench, H. G. Weatherill	790,860

DESIGNS.

Badge, T. A. Bramberry	37,437
Picture frame, W. L. Cooper....37,443 to	37,446
Picture frame ornament, E. W. Habermaas	37,447
Silver, plated, or similar ware, metal ornament for, G. H. Berry.....37,439 to	37,441
Spoons, forks, or similar articles, handle for, G. Strohhaker	37,438
Tableware, bas-relief border for metallic, A. Steffin	37,442

LABELS.

"Cotton Boll Shells," for waste boll shells, E. S. Lathrop	12,158
"Dentableach," for tooth wash, Dentableach Co.	12,149
"Doctor Nasaki's Eye Tonic," for eye medicine, Stark & Selig	12,148
"Dr. Reitz's Golden Quinine Hair Tonic." for hair tonic, Dr. J. B. Reitz Medicine Co.	12,151
"E-Z-Down American Aromatic Stomach Bitters," for stomach bitters, E. Marx	12,153
"Frazier's Sulphur Hair Tonic," for hair tonic, M. J. Frazier	12,152
"King of Fire," for patent medicine, King of Fire Co.	12,155
"Pinkham's Nonpareil Egg Shampoo Cream," for shampoo cream, Pinkham Mfg. Co.	12,150
"Private Garden Growth," for coffee, Citizens' Wholesale Supply Co.	12,144
"Silk Sheen," for embroidery floss, T. H. Strouse	12,157
"The Christy Safety Razor," for safety razors, R. J. Christy Company	12,156
"The Orpheum Shoe," for shoes, Chas. A. Kaufman Co.	12,147
"The Wise Old Man's Liniment," for pharmeceutical or medicinal preparations, Rosen & Bergner	12,154
"Whitlock's Club Cheroots," for cheroots, E. Whitlock & Co.	12,145
"With These Hose Wear," for hose, F. E. Mistrot	12,146

PRINTS.

"Always in the Weigh," for weighing scales, I. Hirsch	1,330
"Borax in the Home," for borax, Pacific Coast Borax Co.	1,322
"Corn King," for a corn remedy, W. A. Renz	1,323
"Felt Pickers," for piano tools, C. H. Lang	1,329
"Hammer Shank Roller," for piano tools, C. H. Lang	1,328
"Key Rebushing Wedges," for piano tools, C. H. Lang	1,327
"Piano Tuners' Grip," for piano tools, C. H. Lang	1,326
"U. S. Score Pads for Progressive Five Hundred," for game scorers, United States Playing Card Co.	1,325
"Wouldn't you like to hold my hand, Play with Bicycle Cards and you hold good Cards," for playing cards, United States Playing Card Co.	1,324

A printed copy of the specification and drawing of any patent in the foregoing list, or any patent in print issued since 1863, will be furnished from this office for 10 cents, provided the name and number of the patent desired and the date be given. Address Munn & Co., 361 Broadway, New York.

Canadian patents may now be obtained by the inventors for any of the inventions named in the foregoing list. For terms and further particulars address Munn & Co., 361 Broadway, New York.

The Wall Between You and A HIGH SALARY

In every business there is a wall between the man who makes the money and the man who does the work. But in every such wall there is an opening, through which the worker may enter *the higher position* and earn the reward received by MEN WHO KNOW HOW.

The first step towards finding the way is to indicate on the coupon below the occupation in which you desire to win success. In return we will *at our own expense* show you how thousands of others have thus entered good positions; how you, too, may realize your ambition without loss of time—without neglecting your present work, without buying text-books, or obligating yourself to pay more than you can comfortably afford.

Fifteen years ago such an offer as this was beyond the realm of fancy. Today it is made possible only by the development of this great institution, the achievements of which are known and honored in all civilized lands.

INTERNATIONAL CORRESPONDENCE SCHOOLS, Box 942, SCRANTON, PA.
Please explain, without further obligation on my part, how I can qualify for a larger salary in the position before which I have marked X

Bookkeeper	Textile Mill Supt.	Building Contractor
Stenographer	Electrician	Arch. Draughtsman
Advertisement Writer	Electrical Engineer	Architect
Show Card Writer	Telephone Engineer	Structural Engineer
Window Trimmer	Elec. Lighting Supt.	Bridge Engineer
Mech. Draughtsman	Mech. Engineer	Foreman Plumber
Ornamental Designer	Surveyor	Mining Engineer
Illustrator	Stationary Engineer	English Branches
Civil Service	Civil Engineer	Commercial Law
Chemist		

Name
Street and No.
City *State*

THE HARRINGTON & KING PERFORATING CO.
PERFORATED METAL OF EVERY DESCRIPTION, FOR ALL USES.
225 NO. UNION ST CHICAGO, ILL.

Make Rubber Stamps!
Large Profits—Light Work
A few dollars will purchase a complete manufacturing outfit with full instructions. Ambitious young men should investigate at once. *Write for Catalogue*
BARTON MFG. CO.
341 Broadway New York

AUTO STORAGE BATTERIES ALL KINDS
THE WILLARD STORAGE BATTERY CO. CLEVELAND, O.

SEALED PROPOSALS will be received at the office of the Light-House Engineer, Tompkinsville, N. Y., until 12 o'clock M., June 21, 1905, and then opened, for furnishing miscellaneous articles for the Light-House Establishment, for the fiscal year ending June 30, 1906, in accordance with specifications, copies of which, with blank proposals and other information, may be had upon application to Lieut.-Col. W. T. Rossell, Corps of Engineers, U. S. A., Engineer.

SPECIAL MANUFACTURING.
DIES AND STAMPINGS TO ORDER.
SPEC'L MACHINERY-MODELS-EXPERIMENTAL WORK.
DROP FORGING DIES AND DROP FORGINGS.
HARDWARE SPECIALTIES ETC. MANFD. TO ORDER. SEND SAMPLES OR DRAWINGS FOR ESTIMATES. WRITE FOR OUR BOOKLET.
THE GLOBE MACHINE & STAMPING CO.
970 HAMILTON ST., CLEVELAND, OHIO.

Experimental & Model Work
Cir. & advice free. Wm. Gardam & Son, 45-51 Rose St., NY.

INVENTORS.—Our specialty is practically developing inventions. Design and build special, plain and automatic machinery, presses, dies, models, patterns and jigs. Send for Booklet No. 5.
A. NACKE & SON, 236-42 S. 9th St., Philadelphia, Pa.

ICE MACHINES. **Corliss Engines,** Brewers' and Bottlers' Machinery. THE VILTER MFG. CO., 899 Clinton St., Milwaukee, Wis

NOVELTIES & PATENTED ARTICLES
MANUFACTURED BY CONTRACT. PUNCHING DIES, SPECIAL MACHINERY.
E. KONIGSLOW STAMPING & TOOL WORKS, CLEVELAND, O.

MODELS & EXPERIMENTAL WORK.
Inventions developed. Special Machinery.
E. V. BILLAARD, 24 Frankfort Street, New York.

Dies, Tools, Models and Special Machinery. Metal Specialties and Stampings Manufactured.
HOEFT & MOORE, Chicago, U. S. A.
OFFICE: 55-61 FIFTH AVENUE. WORKS: INDIANA & FRANKLIN STREETS.

Magical Apparatus.
Grand Book Catalogue. Over 700 engravings
25c. Parlor Tricks Catalogue, free.
MARTINKA & CO., Mfrs., 493 Sixth Ave., New York.

BALLOONS **Aeronaut L. Stevens,** Box 181 Madison Sq., N. Y.

Telegraphy Circular free. Wonderful automatic teacher. 5 styles $2 up. **OMNIGRAPH CO.,** Dept. 52, **39 Cortlandt St., New York.**

Special Machinery designed and built to order.
G. M. MAYER, M.E., 1131 Monadnock Bl., Chicago, Ill.

THE SCHWERDTLE STAMP CO.
STEEL STAMPS, LETTERS & FIGURES.
BRIDGEPORT, CONN.

MASON'S NEW PAT. WHIP HOISTS
save expense and liability incident to Elevators.
Adopted by principal storehouses in New York & Boston
Manfd. by VOLNEY W. MASON & CO., Inc.
Providence, R. I., U. S. A.

RUBBER Expert Manufacturers Fine Jobbing Work
PARKER, STEARNS & SUTTON, 228-229 South St., New York

Transportable, Tempering and Annealing Furnaces Burning Coal. Firms manufacturing such are requested to send prices and drawings under heading L. A. 2592, to RUDOLF MOSSE, Leipzig.

INVENTORS We manufacture METAL SPECIALTIES of all kinds, to order; largest equipment; lowest prices. Send sample or model for low estimate and best expert advice **FREE**
THE EAGLE TOOL CO., Dept. A, Cincinnati, O.

SETS OF CASTINGS OF **MODEL ENGINES**
SEND 10¢ FOR 126 PAGE ILL. CATALOGUE.
ALSO TOOLS, GEAR WHEELS & PARTS OF MODELS
GOODNOW & WIGHTMAN BOSTON
Removed to **182 Milk Street.**



Orient Buckboard 4 H. P. **$375.** 35 Miles an Hour.

The Orient Buckboard

Simple, dependable—works so well everybody likes it. Here's one report: "We are much pleased.... It has climbed the steepest hills... and run beyond our expectations. Have had no extra expense and it runs better than when we first began." It beats half the big cars and costs no fortune. Four styles, $375, $450, $475, $525.

Desire to arrange for energetic representatives in unoccupied territory. Write for Agency proposition.

WALTHAM MANUFACTURING COMPANY
Factory, Waltham, Mass.
Address General Offices, 44 Broad Street, New York
Members of Association of Licensed Automobile Manufacturers.

AUTOMOBILES

Do you want to buy a second-hand automobile? Exchange or sell, write us. We are the largest dealers in new and second-hand automobiles in the world. Write us for our bargain sheet of machines on hand. We are sure we have what you want.

TIMES SQUARE AUTOMOBILE COMPANY
164 W. 46th St., near Broadway, **New York City**



AUTOMOBILES $195
Up (we can sell your auto). Auto and Launch Supplies, Engines, etc. Send postage.
Auto Exchange & Supply Co.
A.L. Dyke, Manager, 3939 Olive, St. Louis

LEARN TO BE A WATCHMAKER

BRADLEY POLYTECHNIC INSTITUTE
Formerly Parsons Horological Institute
PEORIA, ILLINOIS



LARGEST and BEST WATCH SCHOOL in AMERICA

We teach Watch Work, Jewelry, Engraving, Clock Work, Optics. Tuition reasonable. Board and rooms near school at moderate rates.
Send for Catalog of Information.

CHARTER

Stationaries, Portables, Hoisters, Pumpers, Sawing and Boat Outfits, Combined with Dynamos.
Gasoline, Gas, Kerosene.
Send for Catalogue.
State Power Needs.
CHARTER GAS ENGINE CO., Box 148 STERLING, ILL.

What Is Daus' Tip-Top?

TO PROVE that Daus' "Tip-Top" is the best and simplest device for making **100 copies** from pen-written and **50 copies** from typewritten original, we will ship complete duplicator, cap size, **without deposit,** on **ten (10) days' trial.**
Price $7.50 less trade discount of 33⅓ per cent, or $5 Net
The Felix A. B. Daus Duplicator Co., Daus Bldg., 111 John St., New York

Scales All varieties at lowest prices. Best Railroad Track and Wagon or Stock Scales made. Also 1000 useful articles, including Safes, Sewing Machines, Bicycles, Tools, etc. save Money. Lists Free. CHICAGO SCALE CO., Chicago, Ill.

The Most Modern Marine Motor



having the most rapid speed and weighing least per h. p. and possessing the fewest parts is the **Van Auken Motor.** No vibration, easy to operate, simple, reliable, clean. Great power. Perfect control. Always ready. Every stroke cleans the cylinder.
VAN AUKEN-CLEVAUC CO.
Yonkers, N. Y., U. S. A.

CRUDE ASBESTOS

DIRECT FROM MINES
PREPARED ASBESTOS FIBRE for Manufacturers use
R. H. MARTIN,
OFFICE, ST. PAUL BUILDING
220 B'way, New York.

Photo Lenses

and Shutters of every kind for all purposes; Professional, Amateur, Process.
Sold Round the World on all Cameras. Catalogue free.
Bausch & Lomb Opt. Co.
ROCHESTER, N. Y.
New York Chicago Boston

PORTABLE CONCRETE
Block Machine

Ambitious young men can start fine business, immediately profitable, easily expanded
Blocks cost 6 cents to make, sell for 18 cents. One man can make 200 blocks per day. Whole outfit costs $125.00.
Sand, water and Portland cement only materials required.
Sent on trial.
THE PETTYJOHN CO.
515 N. 9th St., Terre Haute, Ind.

PARALLEL CH·BESLY&Co CLAMPS ALL ANGLES Chicago SIDES=U·S·A
15 to 21 Clinton Street.

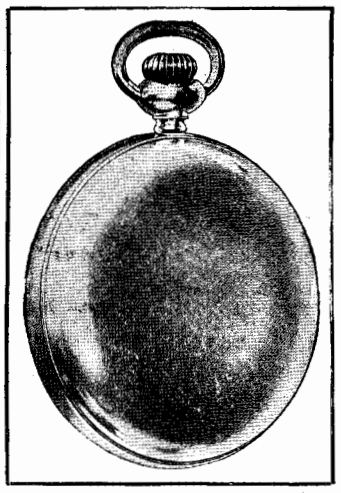

New England WATCHES

Interest you because while absolutely guaranteed for accuracy, they are away ahead of any watch on the market in appearance and workmanship--equal to the most expensive; but they sell for so little the price will surprise you. Ask any jeweler to show them to you. If you do not find them on inquiry—write us Write us anyway, for our Red book describing men's watches, and our Blue book of ladies' watches. We will send them to any address upon request.

The New England Watch Co.
37-39 Maiden Lane New York City
63 Victoria Street Liverpool, England

The First Effective Power Brake for Automobiles



Size 6x15 ins.

and the only one operated by power from the engine. Heretofore the brake has been operated by foot or hand power, but now the

Watres Spent Gas Brake

does all the work of motoring without taking any power from the running of the engine Acts slow or quick on big or little machines. Adds to safety. The cam device blows a whistle louder than any horn and also inflates tires. No pump necessary. Price, complete, of brake. whistle and tire filler, **$50.00.**

THE WATRES GAS ENGINE WHISTLE
for gasoline launches is on the same principle. Can be plainly heard two miles away. Write us for special booklet describing either device.
GAS ENGINE WHISTLE COMPANY, 1137 Broadway, New York

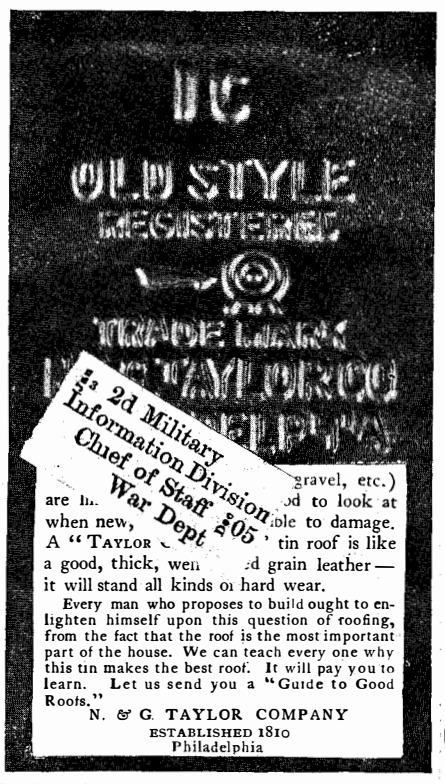

...gravel, etc.) are li... ...d to look at when new, ...ible to damage. A "TAYLOR ..." tin roof is like a good, thick, wea... ...d grain leather—it will stand all kinds of hard wear.

Every man who proposes to build ought to enlighten himself upon this question of roofing, from the fact that the roof is the most important part of the house. We can teach every one why this tin makes the best roof. It will pay you to learn. Let us send you a "Guide to Good Roofs."

N. & G. TAYLOR COMPANY
ESTABLISHED 1810
Philadelphia

Type G Engine

8 to 100 H. P.

OLDS ENGINES

Economical Power

In sending out their last specifications for gasoline engines for West Point, the U. S. War Department required them "to be **Olds Engines** or equal." This speaks volumes for our engines. It means they excel all others or the U. S. Government would not demand them.

They are the horizontal type, 2 to 100 H. P., and are so simply and perfectly made that it requires no experience to run them, and

Repairs Practically Cost Nothing.

Send for a catalogue of our Wizard Engine, 2 to 8 H. P. (spark ignition system, same as in the famous Oldsmobile) the most economical small power engine made; fitted with either pump-jack or direct connected pump; or our general catalogue showing all sizes.

Olds Gasoline Engine Works, Lansing, Mich.

New York Agents, R. H. DEVO & Co., Binghamton, N. Y.

JESSOP'S STEEL THE VERY BEST FOR TOOLS, SAWS ETC.
WM. JESSOP & SONS Ltd. 91 JOHN ST. NEW YORK



The Modern Machines for Mechanics



Here are two of the most useful and indispensable machines. The cut on the left shows the best Bench Drill ever constructed for sensitive work. Drills from smallest size up to 5-16 inch. Spindle has Morse No. 1 taper hole and is counterbalanced by coil spring around feed lever shaft. Insures perfectly true and accurate work. The Twentieth Century Polishing Lathe, see cut on right, is one of many different styles and sizes of Polishing Lathes that we manufacture. We have them to run by foot or belt power, for use in all mechanic's lines. Send for catalogues B-15, C-15.

THE W. W. OLIVER MFG. CO., 1482 Niagara St., Buffalo, N. Y.

Opaque Projector

A Magic Lantern for showing Engravings, Prints, Cuts, Illustrations in Books, Models and Specimens on the Screen without previous preparation, brilliantly lighted and in natural colors. Send for circular.
Williams, Brown & Earle
Dept. 6, 918 Chestnut St., Philadelphia, Pa.

Complete Only **$15.**

BURNS WOOD or COAL

JUST SEND ME ONE DOLLAR

and I will ship C. O. D. to any railroad station in the U. S. this fine Willard Steel Range Anyone can say they have the best range in the world, but I will furnish the evidence and leave the verdict to you. After you examine this range, if you are satisfied in every way, pay Agent $14.00 and freight, and you become the possessor of the best range in the world for the money. The range has six 8-inch lids; 18-inch oven; 15-gallon reservoir; large warming closet; top cooking service 30x34 ins. Guaranteed to reach you in perfect order. Shipping weight, 400 lbs. Thousands in use and every one of them giving satisfaction Write for full description and testimonials.

WM. G. WILLARD
No. 12 WILLARD BUILDING
316-320 CHESTNUT STREET ST. LOUIS, MO



We have complete Outfits for ....

YOUR OWN ELECTRIC LIGHTS

Any size place, summer homes, launches, yachts, etc. Every detail included; very best material; practical. So simple no electrician required. **Light All the Time,** as storage battery included. **Gas, Gasoline** or **Steam** engines used give plenty of power for pumping water, sawing wood, refrigeration, etc. For our new 56-page Catalogue describing over 100 different outfits, address

ELECTRIC DEPARTMENT
RICHARDSON ENGINEERING CO., Hartford, Conn.



Model F, $950, f.o.b. Detroit.

Power Economy

Cadillac construction is so simple—so closely does it approach absolute perfection—that practically all energy the motor develops is used in an actual *propelling force.* This principle of economizing power—and hence *minimizing the cost of maintenance*—is the chief feature of Cadillac superiority.

CADILLAC

economy, coupled with unfailing reliability, has placed the "Car that Climbs" in the front rank of motor vehicles. Of all automobiles it comes nearest to being actually *trouble-proof.*

You would be interested in our beautiful catalog—still more interested in seeing and trying a Cadillac at the nearest dealer's.

Write for booklet N and the dealer's address

Model F—Side-Entrance Touring Car shown above, $950.
Model B—Touring Car with detachable Tonneau, $900.
Model E—Light, stylish, powerful Runabout, divided seat, $750.
Model D—Four Cylinder, 30 h. p. Touring Car, $2,800.

All prices f.o.b. Detroit.
CADILLAC AUTOMOBILE CO.
Detroit, Mich.
Member A. L. A. M.

AGENTS WANTED



WE want a live man in every town in the country to act as our official agent in securing subscribers to MODERN MACHINERY. The work can be carried on nicely without interfering with your present occupation and it's an easy way to make a little money on the side.
MODERN MACHINERY PUB. CO.
917 Security Bldg., Chicago, Ill.

Patented May 10, 1904

Banner Welding and Brazing Compounds

Welds at a low heat, does not fly. Saves time and fuel. GUARANTEED to weld iron to steel or malleable iron. Pass all arguments until you have tried the BANNER BRANDS. We will send a large free sample upon inquiry.

Cortland Specialty Co.
Sole Manufacturers. CORTLAND, N. Y.

THE LIGHT MOUNTAIN AND MINING TRANSIT

An instrument fitted with separable leveling head. Graduations on sterling silver, 5 5-8 inches diameter, two double opposite verniers, reading to minutes. Telescope 8 1-2 inches long, with aperture 1 1-8 inches. Well balanced. Will reverse at either end. Gives large clear field. Clamps and tangent to telescope axis. Compass needle 3 1-2 inches long. Variation arc. Long taper centers with broad flanges. Weight 10 pounds. Tripod 7 1-2.

THE HANNA MFG. CO., Troy, N. Y., U. S. A.

NON SKIDDING



UNPUNCTURABLE

SAMSON LEATHER TIRE

A. E. GALLIEN, Mgr.

UNITED STATES BRANCHES
NEW YORK 12 West 33d St.
BOSTON 20 Park Square
PHILADELPHIA 1120 Chestnut St.
CHICAGO, 1461 Michigan Boulevard. CLEVELAND, 406 Drie St.